

Frontiers in Integrated Science and Technological Innovation

Dr. K. ARUMUGANAINAR

Mrs. DIMPLE JUNEJA

Dr. M. KARTHICK

Dr. S. VISHNU



Frontiers in Integrated Science and Technological Innovation

April 2026

Dr. K. ARUMUGANAINAR

Assistant Professor, Department of Mechanical Engineering
J.P. College of Engineering
Tenkasi, Tamil Nadu, India.

Mrs. DIMPLE JUNEJA

Research Scholar, Department of Education
Mohanlal Sukhadia University
Udaipur, Rajasthan, India.

Dr. M. KARTHICK

Assistant Professor
Department of Mechanical Engineering
Vel Tech Rangarajan Dr. Sagunthala R&D Institute of Science
and Technology, Chennai, Tamil Nadu, India.

Dr. S. VISHNU

Assistant Professor, Centre for Sustainable Materials Research
Department of Mechanical Engineering
Academy of Maritime Education and Training (AMET)
Deemed to be University, Kandahar, Chennai, India.

April 2026

ISBN: 978-81-685538-0-4



© Copyrights reserved by Authors and Publishers

Despite our best efforts, there is still a risk that some errors and omissions might occur unintentionally.

Without the prior consent of the authors and publishers, no part of this publication may be duplicated in any form or by any means, whether electronically, by photocopying, or otherwise.

The opinions and findings expressed in the individual chapters are those of the authors and the book's editors, not the publishers.

Images attributed from www.freepik.com, www.quillbot.com

Published By



SCIENTIFIC RESEARCH REPORTS

(A Book Publisher, approved by Govt. of India)

**I Floor, S S Nagar, Chennai - 600 087,
Tamil Nadu, India.**

editors@srrbooks.in, contact@srrbooks.in

www.srrbooks.in

PREFACE

The rapid convergence of scientific disciplines and technological domains has redefined the landscape of modern research and innovation. *Frontiers in Integrated Science and Technological Innovation* is conceived as a comprehensive volume that captures this multidisciplinary evolution, bringing together diverse yet interconnected studies spanning materials science, mechanical engineering, energy systems, healthcare, social sciences, and environmental sustainability.

This book opens with an exploration of advanced materials, highlighting recent developments in polyester composites with a focus on their mechanical and tribological behavior. Such studies underline the growing importance of engineered materials in enhancing durability and performance across industrial applications. Complementing this, investigations into perovskite nanoparticles and D-Phenylglycinium derivatives provide deep insights into structural, morphological, optical, and nonlinear optical properties, emphasizing their potential in next-generation optoelectronic devices.

The volume also bridges technology with societal dimensions. The analysis of multi-generational workforce dynamics in Chennai city offers a timely perspective on organizational behavior, workplace diversity, and the challenges faced by young professionals in a rapidly evolving economic environment. This inclusion reinforces the idea that technological progress must be understood alongside human and social factors.

Healthcare advancements form another critical pillar of this collection. The discussion on recent strategies for managing Chronic Obstructive Pulmonary Disease (COPD) reflects the integration of medical research with technological interventions, aiming to improve patient outcomes and quality of life. Such contributions demonstrate the vital role of interdisciplinary approaches in addressing complex health challenges.

Engineering innovation is further showcased through studies on surface engineering and coating technologies for tool steels, as well as automotive safety systems like rear collision warning mechanisms. The structural integrity analysis of electric vehicle battery enclosures under impact conditions underscores the urgency of developing safe and reliable solutions in the transition toward sustainable mobility.

Energy and environmental sustainability are central themes woven throughout the book. Reviews on vegetable oil-based fuels and biofuels highlight alternative energy pathways for reducing emissions in compression ignition engines. These discussions are complemented by a broader examination of sustainability and environmental chemistry, focusing on principles, processes, and remediation strategies essential for addressing global ecological concerns.

Collectively, the chapters in this volume reflect a unifying vision: that innovation thrives at the intersection of disciplines. By integrating theoretical insights, experimental research, and applied technologies, this book aims to serve as a valuable resource for researchers, academicians, and industry professionals seeking to

navigate and contribute to the evolving frontiers of science and technology.

It is our hope that this compilation not only informs but also inspires further interdisciplinary collaboration and transformative innovation. We extend our sincere thanks to our publisher, **Scientific Research Reports, Chennai, India**, for their dedicated efforts in preparing this book and for ensuring the inclusion of enriched and high-quality technical content.

Wishes and Regards,

Dr. K. ARUMUGANAINAR

Assistant Professor, Department of Mechanical Engineering
J.P. College of Engineering
Tenkasi, Tamil Nadu, India.

Mrs. DIMPLE JUNEJA

Research Scholar, Department of Education
Mohanlal Sukhadia University
Udaipur, Rajasthan, India.

Dr. M. KARTHICK

Assistant Professor
Department of Mechanical Engineering
Vel Tech Rangarajan Dr. Sagunthala R&D Institute of Science and
Technology, Chennai, Tamil Nadu, India.

Dr. S. VISHNU


Assistant Professor, Centre for Sustainable Materials Research
Department of Mechanical Engineering
Academy of Maritime Education and Training (AMET)
Deemed to be University, Kanathur, Chennai, India.

CONTENTS

Chapter No	Chapter Titles	Page No
1	Recent Developments of Mechanical and Tribological Properties of Polyester Composites: A Review T Elaiyaraja, G Manikandan, S Manikandan, S Susuindhar, S Mukelan	1-8
2	Structural, Morphological and Surface Investigation of Perovskite (LSNO) Nanoparticles Jeya Priya C V, M Parthasarathy, V Gowthami	9-20
3	Synthesis, Growth, Structural, Optical Assessments and Second Order NLO Studies of D-Phenylglycinium Derivatives for Optoelectronic Applications M Mohanraj, V Gowthami, M Parthasarathy	21-33
4	The Impact of Multi-Generational Workforce on Young Professionals in Chennai City K Lakshmi, A Meenakshi	34-38
5	Recent Advancement for the Management of COPD Disorders M Komala, Padmavathy J, Kamali	39-45
6	Advanced Surface Engineering and Coating Technologies for Tool Steels M Ruban, R Sridhar, S Ajith Arul Daniel, S Vijayaraj, M K Soundarya, Ashwin R, Mohan Raj P	46-59

Chapter No	Chapter Titles	Page No
7	Rear Collision Warning System S Venugopal, Yogesh D, Yuvaraj K	60-66
8	Structural Integrity Analysis of EV Battery Enclosure under Impact Loads S Jacob, Naresh D, Nithish Kumar S	67-73
9	Influence of Vegetable Oil Fueling on Efficiency and Exhaust Emissions of a Compression Ignition Engine — A Review Sathish K, S Arunkumar, S Baskar, S Ramasubramanian, R Sridhar	74-81
10	Role of Biofuels in Reducing Diesel Engine Emissions: A Systematic Review S Ramasubramanian, Sathish C, Aravind Y	82-89
11	Sustainability and Environmental Chemistry: Principles, Processes, and Remediation K Sivakumar, R Priyadharshini, Vikas Singh	90-100
12	3D Printing in Pharmaceuticals V.Nivathra, Umadevi.A	101-114
13	Biodiesel Production: A Comprehensive Overview A.Kumaravadivel, T.Jayakumar, I.Rahamathullah	115-127

Chapter No	Chapter Titles	Page No
14	Comparison of Static, Modal and Transient Analysis of A Composite Cylinder Using FEA	128-134
	Shaisundaram V.S., Arun Vikram M P, Azhagesan N	

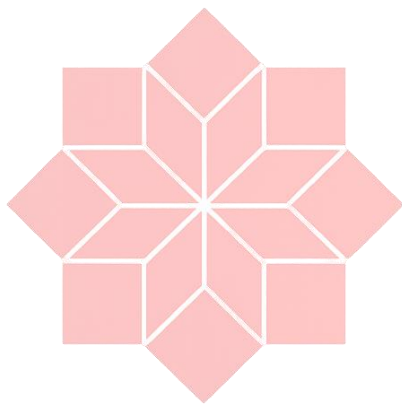

SRR

Publicizing Research

Chapter 1

Recent Developments of Mechanical and Tribological Properties of Polyester Composites: A Review

**T.Elaiyaraja¹, G.Manikandan², S.Manikandan²,
S.Susuindhar², S.Mukelan²**

¹Assistant Professor, Department of Mechanical Engineering, Roever Engineering College, Perambalur, Tamil Nadu, India.

²UG Student, Department of Mechanical Engineering, Roever Engineering College, Perambalur, Tamil Nadu, India.

Corresponding Author: elaiyabala18@gmail.com

Abstract

Polyester matrix composites have attracted a lot of popularity in research due to their ability to be reinforced with various materials, lightweight, and cheap processing. This review paper thoroughly discusses the experimental advancements of the last period that have been made in the mechanical and tribological properties of polyester composites reinforced with natural fibers, synthetic fibers, and hybrid particulate fillers. Properties obtained from tensile flexural hardness, and impact tests are considered along with wear rate, friction coefficient, and sliding behavior under different load and speed conditions. Failure mechanisms have been explained through microstructural correlations using SEM fractography. This review first gathers the numerical results reported in the recent literature, then points out the factors limiting the performance and finally highlights the future research areas to design high-performance, sustainable polyester composite systems.

Keywords: Polyester matrix composites, mechanical properties, tribological behaviour, natural fibre reinforcement, wear resistance.

1. Mechanical Properties of Polyester Composites

1.1 Tensile, Flexural, and Impact Behaviour

Polyester composites reinforced with natural and synthetic fibres show a significant increase in mechanical properties that are mainly dependent on fibre volume fraction, fibre orientation, matrix fibre interfacial adhesion, and surface treatment efficiency. Glass fibre reinforced polyester (GFRP) at 40 vol.% fibre loading can deliver UTS values of 210-260 MPa and flexural strength of 280-320 MPa, which are significantly higher than unreinforced polyester (UTS 45-55 MPa) [1]. Natural fibre reinforcements jute sisal coir, and kenaf provide advantages in density (1.21.5 g/cm³ against g/cm³ for glass) with close specific strengths, especially after alkaline (NaOH, 510 wt.%) or silane surface treatment, which enhance fibrematrix bonding by decreasing contact angle from ~65 to ~28 and raising interfacial shear strength by 25-40%. Hybrid polyester composites made of glass and natural fibres show a positive hybridisation effect, where tensile modulus increases synergistically beyond the rule-of-mixtures prediction. Kenaf/glass hybrid polyester at 30/10 wt. % loading achieved UTS of 187 MPa and flexural modulus of 14.3 GPa, whereas kenaf/polyester gave 134 MPa and 9.8 GPa, a 39.5% and 46% increase respectively [3]. Impact strength is also in alignment with this pattern, hybrids being able to absorb 35-55 J/m while mono-reinforced natural fibre composites absorb 18-24 J/m only, which is due to mechanisms of crack deflection and fibre pull-out energy dissipation. Particulate fillers SiC, Al₂O₃, fly ash, and TiO₂ at 5-15 wt.% level improve hardness (Shore D: 78-91) and compressive

strength (85-130 MPa) while they slightly decrease elongation at break from 2.8% to 1.41.9%, this is indicative of increased stiffness and lower matrix plasticity [4].

1.2 Hardness and Microstructural Observations

Microhardness tests (Vickers, 0.5 kgf load) show that adding filler leads to stiffening. Polyester filled with 10 wt.% TiO₂ goes up to 38 HV versus 22 HV for polyester only a 72.7% raise that is due to both the great hardness of TiO₂ (900 HV) and the pinning effect of the grain boundaries of TiO₂ on the polymer network [4]. SEM fractography of tensile-failed specimens reveals three major failure modes: (i) pure matrix failure in systems without fibres or with very low fibre content, (ii) fibrematrix debonding at untreated interfaces, and (iii) mixed-mode failure with fibre fracture in alkaline-treated hybrid systems. Voids, the content of which was determined by Archimedes density measurements, were very low, varying from 1.8 to 4.5% in composites made by hand lay-up and below 1.2% in compression-moulded systems, resulting in a 15 to 22% loss in flexural strength for every 1% void rise [1].

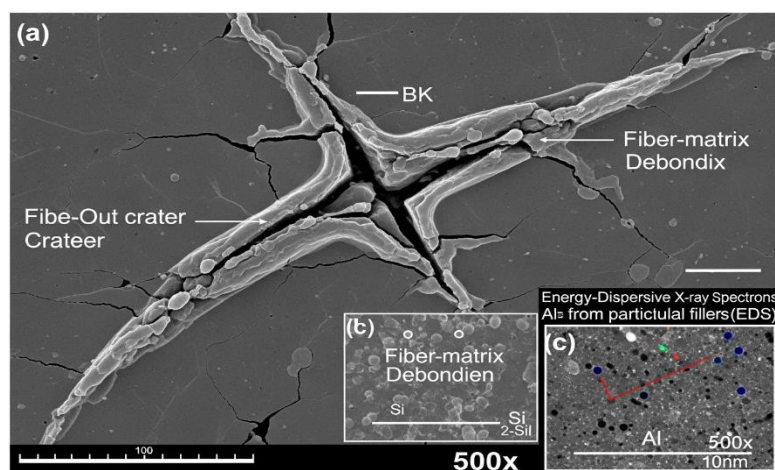


Figure 1: SEM fractograph of a hybrid polyester composite reinforced with glass and jute fibres

2. Tribological Properties of Polyester Composites

2.1 Wear and Friction Behaviour

Table: 1: Tribological Properties of Selected Polyester Composites from Literature

Matrix	Reinforcement	Load (N)	Sliding Speed (m/s)	Wear Rate ($\times 10^{-4}$ mm ³ /Nm)	Friction Coefficient (μ)	Reference
Polyester	30% Glass Fibre	20	1.0	3.12	0.38	[1]
Polyester	20% Jute + 10% Glass	30	1.5	4.85	0.44	[3]
Polyester	10% SiC + 20% Glass	25	1.0	2.34	0.32	[5]
Polyester	10% TiO ₂ particulate	20	0.5	5.67	0.51	[4]
Polyester	15% Al ₂ O ₃ + 15% Sisal	40	2.0	3.89	0.41	[6]

Dry sliding wear behavior of polyester composites, as determined by pin-on-disc tribometers according to ASTM G99, varies significantly with work load (10 to 50 N), sliding speed (0.5 to 3.0 m/s) and type of reinforcement. Specific wear rate of polyester significantly drops (by 3562%) when it is reinforced with glass fibres. This is because fibres not only carry the compressive contact stresses but also limit the polymer matrix direct contact with the counter face [1]. Use of SiC particulate (10 wt.%) reduces the wear rate even further to 2.34 10 mm³/Nm by being a load-bearing third body and also by forming a protective tribofilm at the contact interface [5]. Friction coefficient falls within 0.28-0.55 for composite systems whereas self-lubricating graphite additions (3 to 5 wt. %) are capable of cutting down to 0.18 to 0.24 levels owing to solid lubricant film formation [6].

2.2 Erosive Wear and Elevated Temperature Tribology

Erosive wear resistance, determined at various impingement angles of 30°-90° with silica sand erodent (150-250 μm , 40-60 m/s velocity), shows that polyester composites are semi-ductile materials and they experience the greatest erosion at 45-60° impingement angles. Glass/polyester composites give out an erosion rate of 8.2 mg/kg at 45 against 14.6 mg/kg for neat polyester - a 43.8% lowering that is achieved through a fibre-reinforced surface layer resistant to lateral cutting by erodent particles [7]. Exposure to high temperatures (60-100°C) causing matrix softening is equivalent to lowering hardness by 18-30% and increasing wear rate by 2.1-3.4 times which exposes the thermal stability as a major drawback. Addition of nanosilica (SiO_2 , 20-50 nm) at 3 wt.% level is capable of raising wear resistance at elevated temperatures by 28% due to increased matrix crosslinking and better thermal conductivity [8].

2.3 Fabrication Methods and Their Influence on Tribological Performance

Hand lay-up, still the most popular open-mould technique, yields composites with void fractions of 2.5-4.8%, which serve as stress concentration sites during sliding contact thereby making subsurface crack nucleation faster and also the wear rate goes up by 18-25% compared to closed-mould processed counterparts [9]. Compression moulding at pressures of 5-15 MPa not only lowers void content to less than 1.2% but also enhances the fibrematrix contact area, resulting in wear rates that are 20-30% less than hand lay-up fabricated equivalents under the same tribological test conditions [6]. At controlled injection pressures (0.3-0.8 MPa), resin transfer moulding (RTM) provides excellent fibre wetting and impregnation

uniformity producing composites with fibre volume fractions of 45-55% and void content less than 0.9%. Glass/polyester composites processed by RTM showed specific wear rates of 1.98 10 mm/Nm at 30 N load - about 36% lower than hand lay-up processed equivalents due to better interfacial bonding and fewer stress-raising voids at the tribocontact zone [5]. Vacuum-assisted resin infusion (VARI) goes a step further in removing trapped air and results in hybrid natural/synthetic fibre polyester systems with porosity close to zero (0.5%), and the coefficient of friction decreases by 12-18% as compared to the conventional casting, which is due to the surface being smoother (Ra: 0.8-1.4 μm vs. 2.1-3.6 μm in hand lay-up) and hence the adhesive wear contribution is limited [10].

Post-cure temperature is one of the most important factors affecting the tribological performance of materials. Composites post-cured at 80°C for 4 hours can have a crosslink density-level improvement in the range of 15-22% when compared with those cured at room temperature, leading to less matrix deformability under frictional heating and up to 24% reduction in steady-state wear rates at high sliding speeds (2.0-3.0 m/s) [9].

3. Conclusion

Polyester composites reinforced with hybrid fibreparticulate systems demonstrate substantial mechanical and tribological performance improvements over unreinforced matrices. Besides 39-78% tensile strength increases, hardness up to 72%, and wear rate reductions in the range of 35-62% can be achieved through optimised reinforcement selection, fibre treatment preparation and control of the production process. Alkaline and silane fibre treatments are crucial in improving the interfacial bonding, which through stress

transfer reduction of void content, besides increasing the stress transfer efficiency. From a tribological viewpoint, the use of SiC and Al₂O₃ particulates results in better wear resistance whereas the addition of graphite leads to a significant decrease in friction coefficients. Advancements in polyester composites that are capable of meeting the requirements of structural and automotive applications depend on future works that combine nano-filler hybridisation, bio-derived matrix systems, and high-temperature tribological characterisation.

References

- [1] Rajesh, J. J., Bijwe, J., Tewari, U. S., & Venkataraman, B. (2001). Erosive wear behaviour of various polyamides. *Wear*, 249(8), 702–714. [https://doi.org/10.1016/S0043-1648\(01\)00695-0](https://doi.org/10.1016/S0043-1648(01)00695-0)
- [2] Rong, M. Z., Zhang, M. Q., Liu, Y., Yang, G. C., & Zeng, H. M. (2001). The effect of fiber treatment on the mechanical properties of unidirectional sisal-reinforced epoxy composites. *Composites Science and Technology*, 61(10), 1437–1447. [https://doi.org/10.1016/S0266-3538\(01\)00046-X](https://doi.org/10.1016/S0266-3538(01)00046-X)
- [3] Jawaid, M., & Abdul Khalil, H. P. S. (2011). Cellulosic/synthetic fibre reinforced polymer hybrid composites: A review. *Carbohydrate Polymers*, 86(1), 1–18. <https://doi.org/10.1016/j.carbpol.2011.04.043>
- [4] Chauhan, S. R., & Thakur, S. (2013). Effects of particle size, particle loading and sliding distance on the friction and wear properties of cenosphere particulate filled vinylester composites. *Materials & Design*, 51, 398–408. <https://doi.org/10.1016/j.matdes.2013.03.071>
- [5] Chand, N., & Fahim, M. (2008). *Introduction to Tribology of Polymers* (2nd ed.). Woodhead Publishing.
- [6] Shalwan, A., & Yousif, B. F. (2013). In state of art: Mechanical and tribological behaviour of polymeric composites based on natural fibres. *Materials & Design*, 48, 14–24. <https://doi.org/10.1016/j.matdes.2012.07.014>

- [7] Patnaik, A., Satapathy, A., Mahapatra, S. S., & Dash, R. R. (2008). Tribo-performance of polyester hybrid composites: Damage assessment and parameter optimization using Taguchi design. *Materials & Design*, 30(1), 57–67. <https://doi.org/10.1016/j.matdes.2008.04.057>
- [8] Wetzel, B., Hauptert, F., & Zhang, M. Q. (2003). Epoxy nanocomposites with high mechanical and tribological performance. *Composites Science and Technology*, 63(14), 2055–2067. [https://doi.org/10.1016/S0266-3538\(03\)00115-5](https://doi.org/10.1016/S0266-3538(03)00115-5)
- [9] Friedrich, K., Zhang, Z., & Schlarb, A. K. (2005). Effects of various fillers on the sliding wear of polymer composites. *Composites Science and Technology*, 65(15–16), 2329–2343. <https://doi.org/10.1016/j.compscitech.2005.05.028>

Chapter 2

Structural, Morphological and Surface Investigation of Perovskite (LSNO) Nanoparticles

Jeya Priya CV¹, M Parthasarathy¹, V Gowthami^{1*}

¹Department of Physics, School of Basic Sciences, Vels Institute of Science, Technology & Advanced Studies (VISTAS), Chennai, 600117

** Corresponding Author: gowthamivijayakumar@gmail.com*


Abstract

Perovskite-type transition metal oxides have emerged as promising electrode materials for next-generation energy storage systems due to their remarkable electronic conductivity, structural stability, and tunable redox properties. In the present study, lanthanum strontium nickel oxide (LaSrNiO₃, LSNO) nanoparticles were synthesized and systematically characterized to investigate their structural, morphological, and surface properties relevant to electrochemical applications. The crystalline phase and structural purity of the synthesized LSNO nanoparticles were confirmed using X-ray diffraction (XRD), revealing a well-defined perovskite crystal structure with sharp diffraction peaks. Fourier transform infrared spectroscopy (FTIR) analysis verified the formation of metal–oxygen bonds and confirmed the presence of characteristic vibrational modes associated with the perovskite lattice. The surface area and pore distribution were examined through Brunauer–Emmett–Teller (BET) analysis, indicating a mesoporous structure that is favorable for electrolyte ion diffusion and enhanced electrochemical activity. Morphological examination using scanning electron microscopy (SEM) revealed agglomerated nanoscale particles with irregular yet porous surface

textures, which provide abundant active sites for charge storage processes. Elemental composition and chemical purity were validated by energy-dispersive X-ray spectroscopy (EDAX), confirming the presence of La, Sr, Ni, and O elements without significant impurities. The combined structural and surface analyses suggest that LSNO nanoparticles possess desirable physicochemical properties suitable for high-performance electrochemical energy storage devices such as super capacitors. These findings provide valuable insights into the design and optimization of Perovskite-based electrode materials for advanced energy storage technologies.

Keywords: Perovskite oxide, Nano material, Transition metal Oxide, LSNO nanoparticles, BET surface area, Energy storage devices.

Graphical Abstract

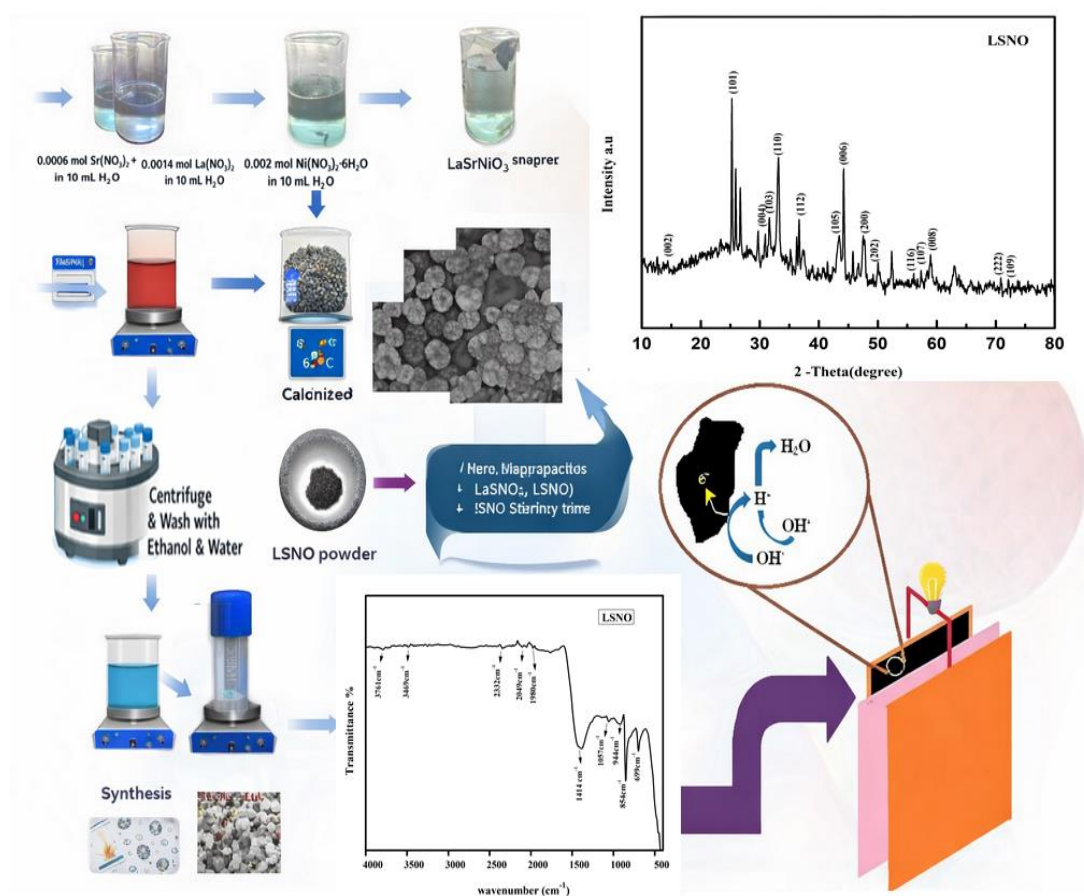

1. Introduction

The rapid growth of global energy demand and the increasing reliance on renewable energy sources have driven significant research interest toward the development of efficient and sustainable energy storage technologies. Among the various energy storage systems, electrochemical supercapacitors have gained considerable attention due to their high power density, fast charge–discharge capability, and long cycling stability compared with conventional batteries[1] However, the performance of supercapacitors largely depends on the properties of electrode materials, particularly their electrical conductivity, surface area, and redox activity. Therefore, the development of advanced electrode materials with improved electrochemical characteristics has become a critical research focus in recent years.

Transition metal oxides have emerged as promising candidates for energy storage applications owing to their multiple oxidation states, good electrochemical activity, and structural versatility. In particular, perovskite-type oxides with the general formula ABO_3 have attracted significant interest due to their flexible crystal structure and tunable physicochemical properties. In this structure, the A-site is typically occupied by rare-earth or alkaline-earth metals, while the B-site is occupied by transition metals. The interaction between these cations leads to unique electrical, magnetic, and catalytic properties, making perovskite oxides suitable for applications in catalysis, fuel cells, sensors, and electrochemical energy storage systems. Lanthanum-based perovskite oxides have been widely investigated because of their excellent electronic conductivity and structural stability. Among them, lanthanum strontium nickel oxide ($LaSrNiO_3$, LSNO) has gained increasing attention as an efficient electrode material due to

its enhanced electrical conductivity and favorable redox characteristics arising from the mixed valence states of nickel ions [2]. The substitution of lanthanum with strontium at the A-site introduces oxygen vacancies and improves charge transport properties, which significantly enhances the electrochemical activity of the material. These characteristics make LSNO a promising candidate for high-performance supercapacitor electrodes. In addition to composition, the electrochemical performance of perovskite materials is strongly influenced by their morphology, particle size, and surface area. Nanostructured materials typically exhibit improved electrochemical performance due to their large surface-to-volume ratio and shorter ion diffusion pathways.

Therefore, controlling the synthesis process to obtain nanoscale perovskite particles with desirable surface characteristics is essential for optimizing their energy storage performance. Various synthesis techniques such as sol-gel, hydrothermal, combustion, and co-precipitation methods have been employed to prepare perovskite oxide nanoparticles [3]. Among these methods, the sol-gel approach offers several advantages, including better compositional control, homogeneous mixing of precursor ions, and the ability to produce highly crystalline nanostructures at relatively lower temperatures. Furthermore, the method allows precise tuning of particle size and morphology, which is critical for improving electrochemical performance. In order to evaluate the suitability of LSNO nanoparticles for energy storage applications, comprehensive characterization of their structural, morphological, and surface properties is required. X-ray diffraction (XRD) analysis provides essential information regarding the crystalline phase and structural integrity of the synthesized material. Fourier transform infrared

spectroscopy (FTIR) helps identify functional groups and metal-oxygen bonding interactions within the lattice. Surface area and porosity measurements using Brunauer-Emmett-Teller (BET) analysis are crucial for understanding ion accessibility and electrolyte interaction during electrochemical processes. Additionally, scanning electron microscopy (SEM) enables the observation of particle morphology and aggregation behavior, while energy dispersive X-ray analysis (EDAX) confirms elemental composition and purity. In this work, LSNO nanoparticles were synthesized and systematically characterized using XRD, FTIR, BET, SEM, and EDAX techniques[4] The aim of this study is to investigate the structural and surface characteristics of LSNO nanoparticles and evaluate their potential as electrode materials for electrochemical energy storage applications. The obtained results provide valuable insights into the relationship between material structure and performance, contributing to the development of advanced perovskite-based energy storage systems.

2. Synthesis of LSNO Nanomaterial

Lanthanum strontium nickel oxide (LSNO) nanoparticles with the general perovskite formula ABO_3 were synthesized by separately dissolving the A-site precursors (La and Sr salts) and the B-site precursor (Ni salt). As illustrated in Fig. 1, 0.002 mol of $Ni(NO_3)_2 \cdot 6H_2O$ was dissolved in 10 mL of distilled water and magnetically stirred for 15 minutes to obtain a clear solution. In a separate beaker, 0.0006 mol of $Sr(NO_3)_2$ and 0.0014 mol of $La(NO_3)_3 \cdot 6H_2O$ were dissolved in 10 mL of distilled water and stirred for 15 minutes to ensure complete dissolution. Subsequently, the two precursor solutions were combined and continuously stirred for an additional 30 minutes to obtain a homogeneous mixture of Ni^{2+} , La^{3+} , and Sr^{2+} ions. The resulting mixed solution was then slowly introduced into 10 mL of 1

M NaOH solution under constant stirring conditions. Upon the addition of NaOH, the solution immediately changed to a light brown color, and after approximately two hours of continuous stirring, a blue precipitate was observed. The obtained precipitate was collected and repeatedly centrifuged using ethanol and distilled water in order to remove residual ions and possible impurities. After the purification process, the collected material was dried in a hot air oven at 60 °C overnight. The dried product was then finely ground using a mortar and pestle to obtain a uniform powder. Finally, the powder was calcined in air at 750 °C for 3 hours, resulting in the formation of highly crystalline LSNO nanoparticles.

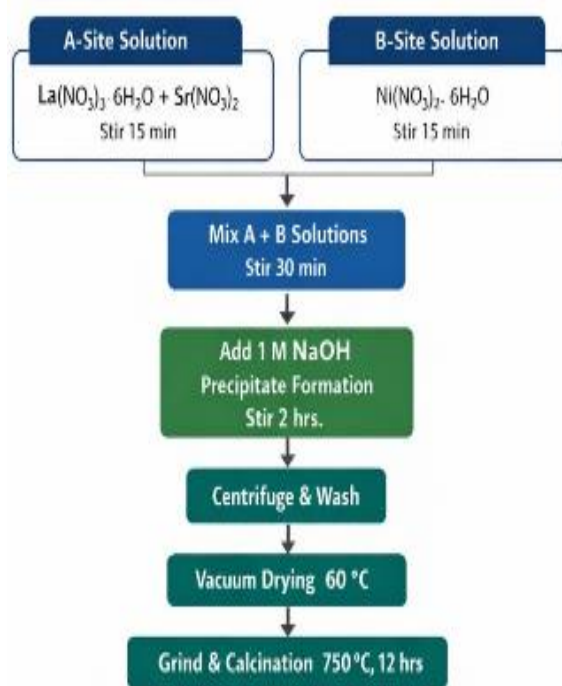


Figure 1: Synthesis of LSNO powder

3. Results and Discussion

3.1 X-ray Diffraction (XRD) Analysis

The crystal structure and phase purity of the synthesized LSNO nanoparticles were investigated using X-ray diffraction analysis. The

XRD pattern exhibits several well-defined diffraction peaks corresponding to the characteristic planes of the perovskite structure[5] Prominent peaks were observed at diffraction angles corresponding to planes such as (101), (110), (112), (105), (200), and (222), indicating the formation of a crystalline perovskite phase. The sharpness and intensity of the diffraction peaks suggest a high degree of crystallinity in the synthesized material. No significant impurity peaks were detected in the diffraction pattern, confirming the successful formation of phase-pure LSNO nanoparticles [6]. The crystalline structure of the material plays a crucial role in facilitating electron transport and improving electrochemical performance. The average crystallite size of the synthesized LSNO nanoparticles can be estimated using the Debye–Scherrer equation:

$$D=0.9\lambda/\beta\cos\theta \quad (1)$$

Where D represents the crystallite size, λ is the wavelength of the X-ray radiation, β is the full width at half maximum (FWHM) of the diffraction peak and θ is the Bragg diffraction angle.

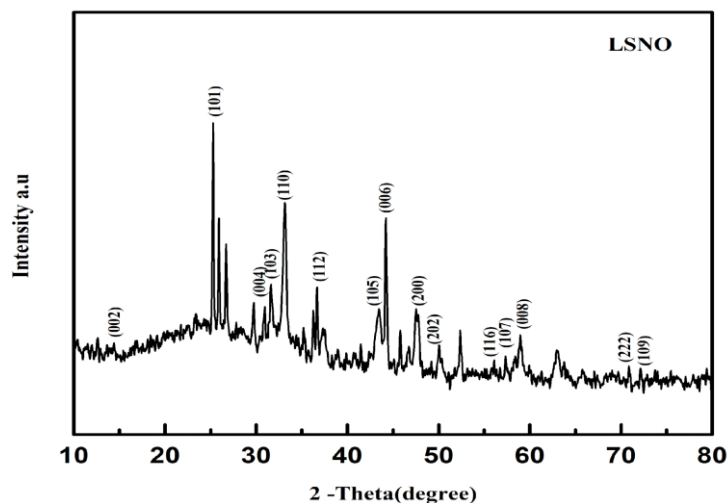


Figure 2: XRD patterns of LSNO sample

The nanoscale crystallite size obtained from the analysis indicates that the synthesized LSNO material possesses a large active surface area suitable for electrochemical reactions.

3.2 FTIR Analysis

Fourier transform infrared spectroscopy was employed to identify the chemical bonding and functional groups present in the LSNO nanoparticles. The FTIR spectrum shows several absorption bands corresponding to different vibrational modes of the material. The broad absorption band observed around 3400–3700 cm^{-1} is attributed to the stretching vibration of hydroxyl (–OH) groups, which may arise from adsorbed moisture on the surface of the nanoparticles. Peaks located around 2300–2000 cm^{-1} correspond to the presence of atmospheric CO_2 adsorption. A strong absorption band appearing near 600–700 cm^{-1} is assigned to the metal–oxygen stretching vibration associated with the Ni–O bond in the perovskite lattice.

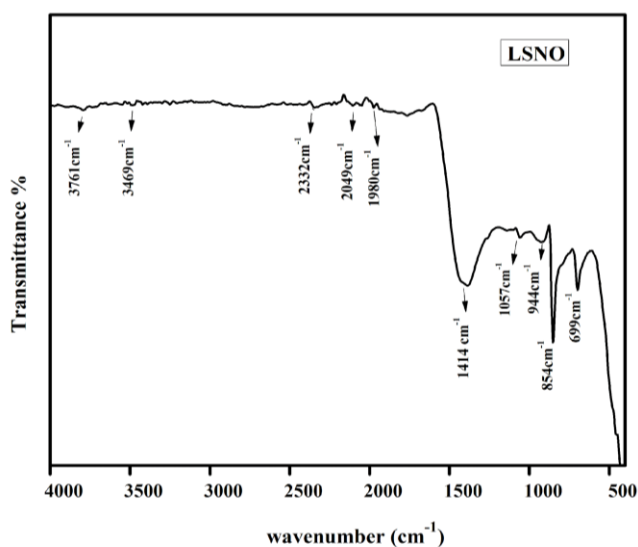


Figure 3: FT-IR spectra of LSNO

This band confirms the formation of the LSNO perovskite framework. Additional peaks observed around 850–1000 cm^{-1} are attributed to lattice vibrations and metal–oxygen bending modes within the oxide structure. These FTIR results confirm the successful formation of the metal–oxygen network characteristic of perovskite oxide materials.

3.3 BET Surface Area Analysis

The surface area and porosity of the LSNO nanoparticles were analyzed using nitrogen adsorption–desorption measurements based on the BET method. The obtained isotherm exhibits a typical adsorption–desorption behavior indicating the presence of mesoporous structures within the material. The gradual increase in nitrogen adsorption with increasing relative pressure suggests the presence of interconnected pores and a relatively high surface area [7].

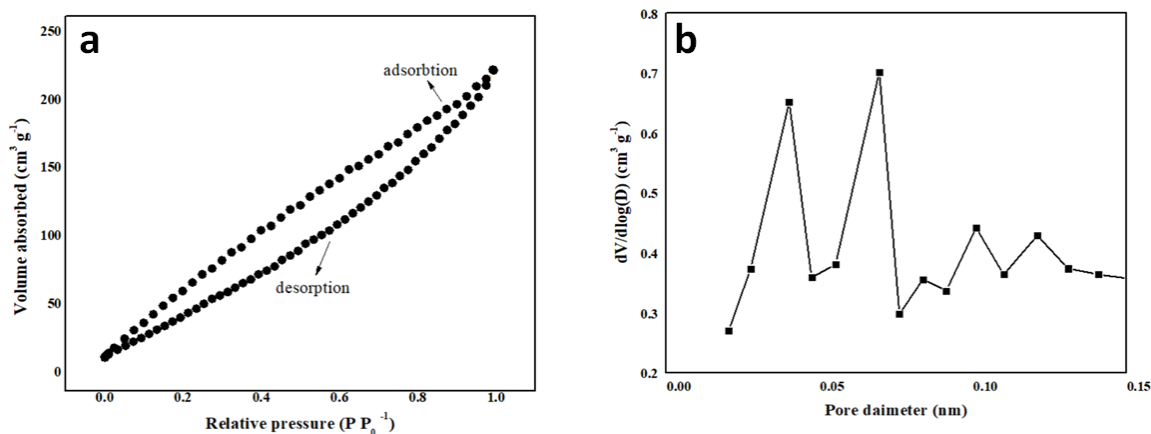


Figure 4: (a) N₂ adsorption-desorption isotherms and (b) Pore Size distribution of the LSNO sample

The mesoporous nature of the material facilitates efficient ion diffusion and electrolyte penetration, which are essential for improved electrochemical performance in supercapacitor applications. The pore size distribution curve indicates the presence of pores in the

nanometer range, further confirming the mesoporous structure of the LSNO nanoparticles.

3.4 SEM Analysis

The surface morphology of the synthesized LSNO nanoparticles was examined using scanning electron microscopy. The SEM images reveal that the particles possess a clustered and agglomerated morphology with irregular shapes. The individual particles appear to be in the nanoscale range and form interconnected networks. Such agglomerated nanostructures provide a porous architecture that can enhance electrolyte accessibility and increase the number of electrochemically active sites. The rough surface texture observed in the SEM images further contributes to improved charge storage behavior by facilitating rapid ion transport [8].

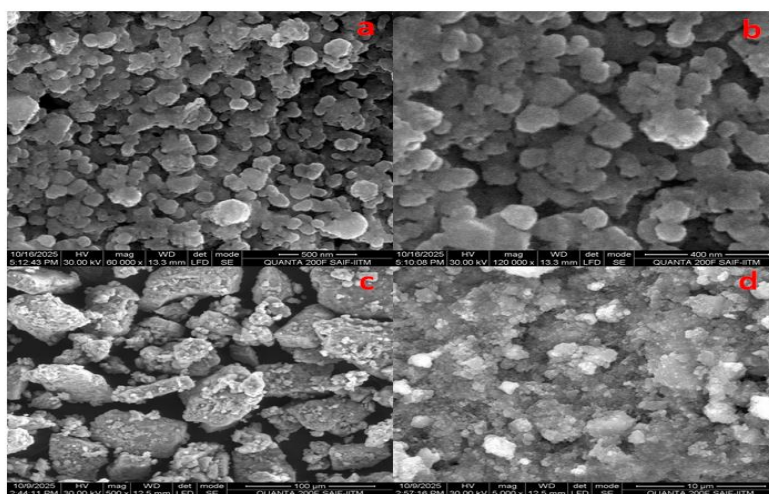


Figure 5: SEM image of LSNO, (a-d) for as prepared

3.5 EDAX Analysis

Energy dispersive X-ray spectroscopy was performed to determine the elemental composition of the synthesized LSNO nanoparticles. The EDAX spectrum clearly shows the presence of lanthanum (La), strontium (Sr), nickel (Ni), and oxygen (O) elements, confirming the

successful formation of the intended perovskite compound. The quantitative elemental analysis reveals weight percentages of approximately La (24.99%), Ni (25.98%), Sr (30.96%), and O (18.06%), which are consistent with the stoichiometric composition of LSNO. The absence of additional impurity peaks indicates the high purity of the synthesized material.

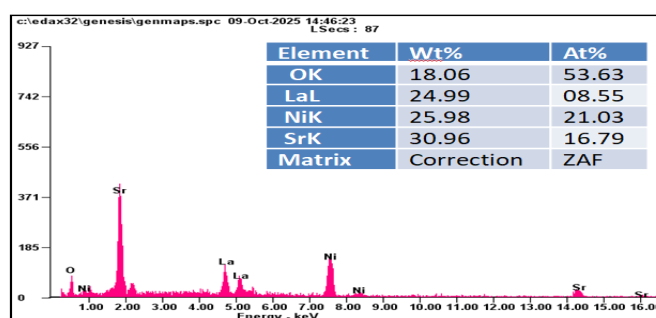


Figure 6: EDAX for LSNO sample.

4. Conclusion

In summary, lanthanum strontium nickel oxide (LSNO) nanoparticles were successfully synthesized and systematically characterized to evaluate their structural and surface properties for energy storage applications. XRD analysis confirmed the formation of a highly crystalline perovskite phase without detectable impurities. FTIR spectroscopy verified the presence of characteristic metal–oxygen bonds associated with the LSNO lattice structure. BET analysis revealed a mesoporous architecture with a relatively high surface area, which is beneficial for electrolyte diffusion and electrochemical activity. SEM observations demonstrated nanoscale particles with agglomerated and porous morphology, providing abundant active sites for charge storage processes. EDAX analysis confirmed the elemental composition and purity of the synthesized material. Overall, the structural integrity, porous morphology, and favorable surface

characteristics of LSNO nanoparticles indicate their strong potential as electrode materials for high-performance supercapacitor and energy storage devices. Future work will focus on evaluating the electrochemical performance of LSNO-based electrodes and exploring composite structures to further enhance their energy storage capability.

References

- [1] Hou, Y., Chen, L., Zhang, L., Kang, J., Fujita, T., Jiang, J., & Chen, M. (2013). Ultrahigh capacitance of nanoporous metal enhanced conductive polymer pseudocapacitors. *Journal of Power Sources*, 225, 304–310.
- [2] Wang, G., Zhang, L., & Zhang, J. (2012). A review of electrode materials for electrochemical supercapacitors. *Chem. Soc. Rev.*, 41(2), 797–828. <https://doi.org/10.1039/C1CS15060J>
- [3] Xu, X., Liang, J., Zhou, H., Ding, S., & Yu, D. (2014). The preparation of hierarchical tubular structures comprised of NiO nanosheets with enhanced supercapacitive performance. *RSC Adv.*, 4(7), 3181–3187. <https://doi.org/10.1039/C3RA45038D>.
- [4] Hu, Q., Yue, B., Shao, H., Yang, F., Wang, J., Wang, Y., & Liu, J. (2021). Facile syntheses of perovskite type LaMO₃ (M=Fe, Co, Ni) nanofibers for high performance supercapacitor electrodes and lithium-ion battery anodes. *Journal of Alloys and Compounds*, 852, 157002. <https://doi.org/10.1016/j.jallcom.2020.157002>.
- [5] Cao, Y., Lin, B., Sun, Y., Yang, H., & Zhang, X. (2015). Sr-doped Lanthanum Nickelate Nanofibers for High Energy Density Supercapacitors. *Electrochimica Acta*, 174, 41–50.
- [6] Liu, X., Hong, R., & Tian, C. (2009). Tolerance factor and the stability discussion of ABO₃-type ilmenite. *Journal of Materials Science: Materials in Electronics*, 20(4), 323–327. <https://doi.org/10.1007/s10854-008-9728-8>.
- [7] Zhang, B., Liu, P., Li, Z., & Song, X. (2021). Synthesis of two-dimensional sr-doped lanio₃ nanosheets with improved electrochemical performance for energy storage. *Nanomaterials*, 11(1), 1–13. <https://doi.org/10.3390/nano11010155>.

Chapter 3

Synthesis, Growth, Structural, Optical Assessments and Second Order NLO Studies of D-Phenylglycinium Derivatives for Optoelectronic Applications

M Mohanraj¹, V Gowthami¹, M Parthasarathy^{1*}

¹Department of Physics, School of Basic Sciences, Vels Institute of Science, Technology & Advanced Studies (VISTAS), Chennai, 600117

** Corresponding Author: mps2k7@gmail.com*

Abstract

The domain of nonlinear optics is witnessing considerable expansion, incorporating knowledge from multiple scientific areas, such as physics, chemistry, optics, crystal growth, optoelectronics, and engineering. The study of nonlinear optics garners significant attention in organic-inorganic blend compounds, owing to their diverse properties that find applications in various fields. In-depth investigations have concentrated on the non-linear optical characteristics of organic and semi-organic crystals, which hold promising applications in device fabrication. A single crystal of D-phenylglycine derivatives, including Bis(D-phenylglycinium) sulfate monohydrate (BDPGS) and D-phenylglycine hydrochloride (DPGCL), were synthesized and grown through the slow evaporation method utilizing water as a solvent. The single crystal XRD analysis demonstrated that BDPGS crystallizes in the monoclinic space group $P2_1$, while DPGCL crystallizes in the orthorhombic space group $P2_12_12$. The optical properties of the compounds were characterized through UV-Visible absorption and reflectance spectra, revealing cut-off wavelengths of 230 nm and 228 nm for BDPGS and DPGCL,

ISBN 978-816855380-4



respectively. This indicates a bandgap of 5.4 eV, suggesting superior optical quality for potential applications. The notably low Urbach energy indicates that the crystal is nearly devoid of defects, thereby maintaining its structural integrity and evaluation of refractive index demonstrated the compounds' promising optical behavior. The effectiveness of the second harmonic generation for the synthesized crystals was clearly demonstrated using the Kurtz Perry powder method, validating both the crystals shows tremendous potential for advanced technological applications.

Keywords: Slow evaporation method, X-ray diffraction, Structural, Optical bandgap, Nonlinear analysis.

1. Introduction

The prevalence of blended materials is rapidly rising, driven by their diverse and impactful applications in fields such as medicine, industry, and materials science. These innovative materials are characterized by their conjugate structures, efficiency, and remarkable chemical adaptability, which bestow exceptional electrical, magnetic, and optical properties [1]. The realm of nonlinear optics is particularly captivated by organic-inorganic blend compounds, owing to their versatility and wide-ranging applicability across various sectors [2]. Extensive research has examined organic and semi-organic crystals' non-linear optical (NLO) properties, highlighting their potential for integration in advanced device fabrication. These crystals offer advantages such as swift response times and high damage thresholds, making them indispensable in modern technology. Notably, organic crystals are exceptionally significant for NLO applications, often showcasing efficiency levels surpassing traditional potassium dihydrogen phosphate (KDP)

crystals [3]. D-Phenylglycine, an aromatic mono-amino carboxylic acid, is distinguished by the presence of a nonpolar group in its side chain, which includes a benzene ring that contributes to its remarkable properties. This compound is a promising precursor in synthesizing semi-synthetic penicillin's and cephalosporins [4]. Recent investigative studies have delved into using phenylglycine derivatives in developing cutting-edge antitumor medications and their effectiveness in mitigating inflammation. Additionally, emerging research suggests their valuable role in enhancing the delivery and absorption of L-DOPA, a crucial therapeutic agent for various medical conditions [5]. This amino acid is not only fascinating in its own right but also acts as a vital precursor in the synthesis of β -lactam antibiotics, such as semisynthetic cephalosporins and penicillin's [6]. Derivatives of D-phenylglycine, including D-phenylglycinium bromide [7], D-phenylglycinium nitrate [8], and D-phenylglycinium perchlorate [9], are currently under intense research due to their interesting physical and chemical properties. In this exciting context, we have embarked on a significant research initiative to grow high-quality non-linear optical single crystals of D-phenylglycine derivatives such as Bis(D-phenylglycinium) sulfate monohydrate (BDPGS) and D-phenylglycine hydrochloride (DPGCL). This synthesis employs a low-temperature solution growth technique, utilizing water as the solvent at ambient temperature. Therefore, our current investigation aims to elucidate key characteristics, including single-crystal X-ray diffraction, UV-Vis transmittance and reflectance studies, and studies on optical parameters such as Urbach energy, steepness parameter, refractive index and SHG studies. This process not only demonstrates the potential of D-phenylglycine derivatives

but also supports further research and applications in advanced optical technologies.

2. Experimental Procedure

2.1 Synthesis and growth of BDPGS

The synthesizing of the sulfuric acid admixture D-Phenylglycinium was meticulously executed by first dissolving high-purity D-Phenylglycine in concentrated sulfuric acid within a carefully measured volume of distilled water. This was performed following a precise stoichiometric ratio of 2:1. The solution was gently stirred for eight hours at a stable temperature of 35°C to achieve a uniform mixture, promoting complete solubility and homogeneity. Once the solution reached the desired consistency, it was filtered through Whatman filter paper, ensuring the removal of any impurities, and transferred into a thoroughly cleaned beaker. This beaker was then covered with a polythene sheet adorned with numerous small perforations, facilitating a controlled and gradual evaporation process. After three weeks, the slow and methodical evaporation yielded an exquisite, transparent single crystal of Bis (D-Phenylglycinium) Sulphate Monohydrate (BDPGS), as shown in Figure 1a.

2.2 Synthesis and growth of DPGCL

To prepare a concentrated solution, D-phenylglycine was carefully mixed with hydrochloric acid in a precise 1:1 ratio and dissolved in distilled water at 35°C. The mixture was then stirred vigorously for six hours to ensure a uniform and homogeneous solution. After thorough mixing, the solution was filtered through Whatman filter paper to remove any impurities. It was then placed in a controlled environment free from mechanical disturbances and thermal

vibrations, allowing the process to proceed naturally. Over several days, the slow and methodical evaporation yielded an exquisite, transparent single crystal of D-phenylglycine hydrochloride, as shown in Figure 1b.

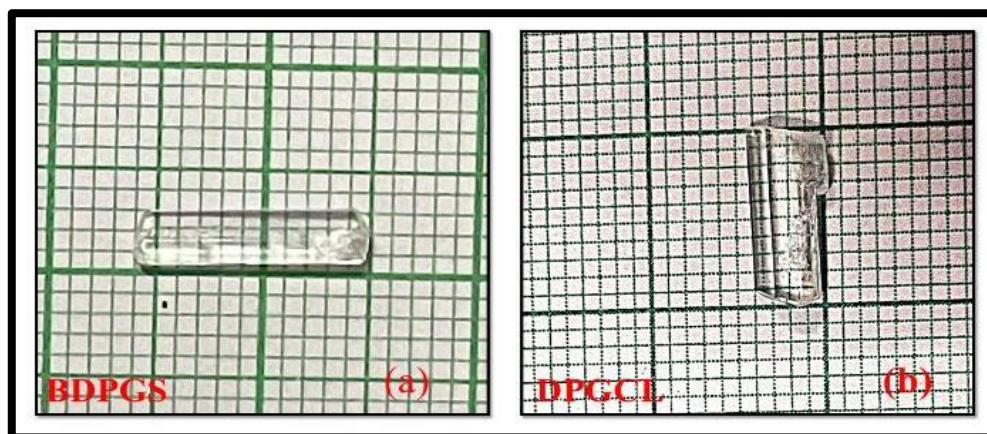


Figure. 1: As grown single crystals of (a) BDPGS (b) DPGCL

3. Results and Discussion

3.1 Single Crystal X-Ray Diffraction Analysis

Table 1. Single-crystal XRD parameters of BDPGS and DPGCL

Lattice Parameters	Present Work (BDPGS)	N. Srinivasan et al. [10]
a (Å)	12.328(3)	12.3201(12)
b (Å)	5.936(12)	5.9377(15)
c (Å)	14.296(3)	14.2908(16)
$\alpha = \gamma$ (°)	90	90
β (°)	111.335 (11)	111.369(10)
Crystal System	Monoclinic	Monoclinic
Space group	P2 ₁	P2 ₁
Lattice Parameters	Present Work (DPGCL)	S. Ravichandran et al. [11]
a (Å)	5.452(17)	5.437(5)
b (Å)	7.278(2)	7.257(8)
c (Å)	22.819(1)	22.773(2)
$\alpha = \beta = \gamma$ (°)	90	90
Crystal System	Orthorhombic	Orthorhombic
Space group	P2 ₁ 2 ₁ 2 ₁	P2 ₁ 2 ₁ 2 ₁

The Bruker D8 Quest SCXRD, which utilizes Mo-K α radiation at ambient temperature, was employed to meticulously investigate and determine the cell parameters of the synthesized crystals of BDPGS and DPGCL. The lattice parameters for this intriguing material are measured, and notably, these values correlate strongly with those previously reported in the literature [10,11], underscoring the reliability of the synthesis and characterization process, as tabulated in Table 1.

3.2 Optical Studies

3.2.1 UV-Visible Absorbance Analysis

The UV-Vis analysis offers a compelling glimpse into the complex interplay between the electronic bandgap, atomic structure, and crystalline characteristics of the material. Our extensive absorption studies on the synthesized compound spanned a broad spectrum of wavelengths, from 200 to 800 nm, providing a thorough examination of its optical properties. The results detailed in Figures 2a and 2b reveal an impressive level of reflectance throughout the visible region, marking this material as an intriguing candidate for further scientific investigation [12]. Notably, Figures 2a and 2b highlight a significant cut-off wavelength at 230 nm and 228 nm for BDPGS and DPGCL, which serves as an important threshold in defining the optical features of the material. To gain deeper insights into its properties, we apply Tauc's relation (1), which serves as an essential framework for calculating the absorption coefficient:

$$(ah\nu)^n = T (h\nu - E_g) \quad (1)$$

In this equation, the exponent n varies based on the type of bandgap present: $n=1/2$ indicates a direct bandgap, while $n=2$ pertains to an indirect bandgap. The resulting Tauc's plot, depicted in Figures 3a

and 3b, indicates that the materials possess an optical bandgap energy of 5.4 eV. This striking revelation underscores the material's promising potential for nonlinear optical applications. Furthermore, this finding suggests that the material boasts a remarkably low concentration of defects, thus opening pathways for innovative applications in advanced photonic devices [13].

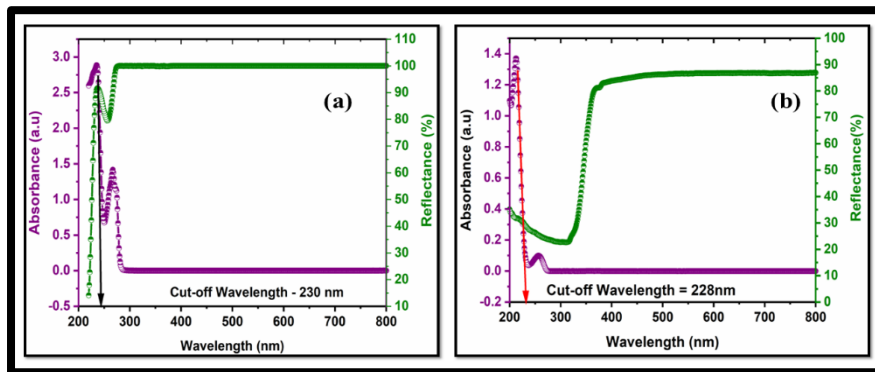


Figure 2: UV-Vis Absorbance and Reflectance spectrum of (a) BDPGS (b) DPGCL

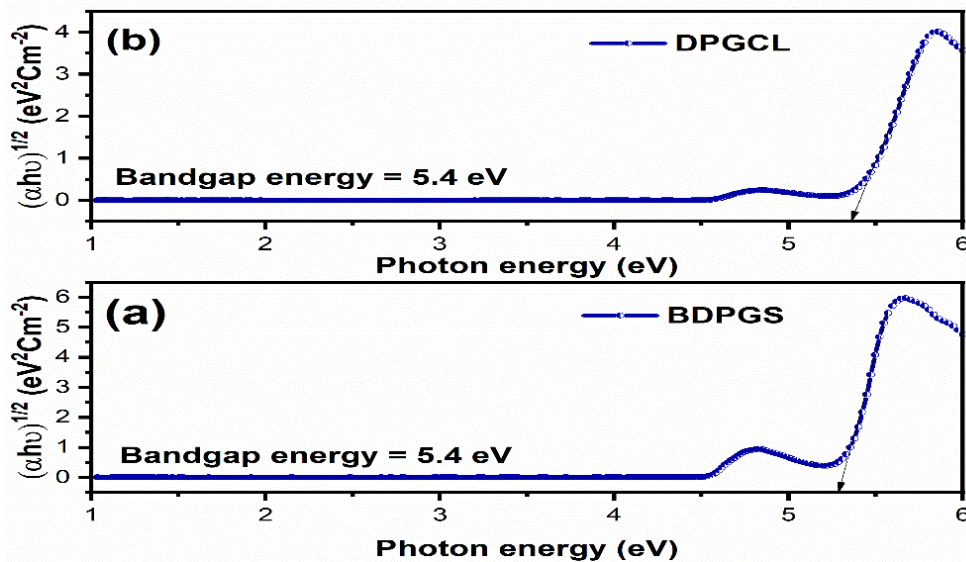


Figure 3: Bandgap Spectrum of (a) BDPGS (b) DPGCL

3.3 Absorption Band Tail

The significance of optical absorption in material science cannot be overstated, as it enables the assessment of a material's

appropriateness for optical applications by offering vital information regarding its optical bandgap. The optical absorption spectra exhibit three distinct regions: a prominent area that denotes the optical bandgap, a subdued section that suggests the existence of flaws and impurities, and an absorption edge that illustrates variations and disruptions within the lattice structure [14]. Next to the optical bandgap on the absorption coefficient curve lies an exponential region referred to as the Urbach tail. The exponential tail, also known as Urbach energy, plays a crucial role in weakly crystalline materials and shows a notable reduction in well-crystalline specimens [15]. An exponential equation illustrates the connection between the absorption coefficient (α) and photon energy, known as the Urbach empirical rule.

$$\alpha = \alpha_o \exp \left(\frac{h\nu}{E_u} \right) \quad (2)$$

$$\ln(\alpha) = \ln(\alpha_o) + \ln \frac{h\nu}{E_u} \quad (3)$$

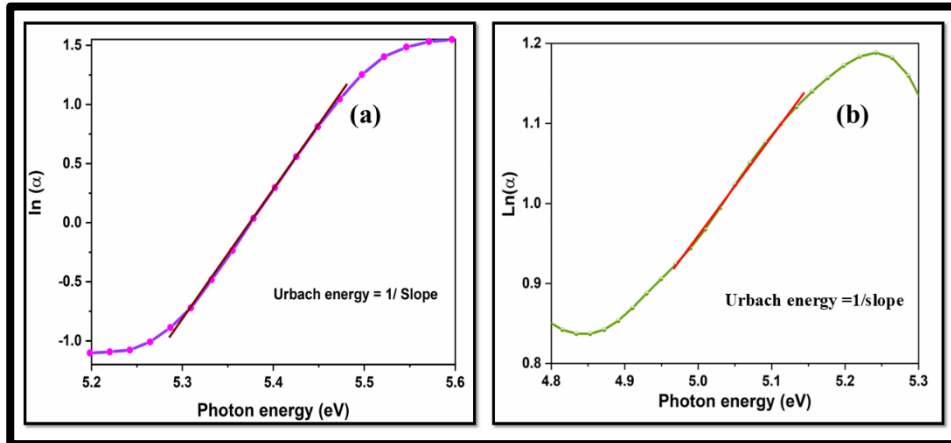


Figure 4: Plot of Photon energy (hν) vs ln(α)

In this equation, the E_U denotes the Urbach energy. The examination of the graph shown in Figures 4a and 4b, which presents photon energy against $\ln(\alpha)$, indicates that the inverse of the slope is

associated with an Urbach energy of BDPGS and DPGCL, measured at 0.1101 eV and 0.858 eV, respectively. This observation indicates that the materials are free from imperfections and lattice disorder [16]. Additionally, Urbach identified a secondary relationship between the absorption coefficient and the optical bandgap, as detailed in equations (4-5).

$$\alpha = \beta \exp \left[\frac{\sigma(h\nu - E_0)}{K_B T} \right] \quad (4)$$

$$\left(\frac{h\nu}{E_U} \right) = \left(\frac{\sigma(h\nu)}{K_B T} \right) \quad (5)$$

Here, E_U is Urbach energy, K_B denotes the Boltzmann constant, and T represents the absolute temperature. The steepness parameter (σ) is determined through equation (6),

$$\sigma = \frac{K_B T}{E_U} \quad (6)$$

Additionally, the strength of the electron-photon interaction (E_{e-p}) is calculated using equation (7),

$$E_{e-p} = \frac{2}{3\sigma} \quad (7)$$

Table 2. Urbach energy and its key parameters of BDPGS and DPGCL

Description	BDPGS	DPGCL
Wavelength of absorption edge (nm)	230 nm	228 nm
Optical bandgap E_g	5.4 eV	5.4 eV
Urbach Energy E_U	0.110 eV	0.858 eV
Steepness parameter σ	0.2138	0.2742
Electron-photon interaction energy E_{e-p}	3.11	2.43

Table 2 summarises the values for the cut-off wavelength (nm), optical band gap energy (E_g), Urbach energy (E_U), steepness parameter (σ), and electron-photon energy (E_{e-p}), of BDPGS and DPGCL indicating that the materials possess exceptional



characteristics and demonstrates significant potential for device fabrication [17].

3.4 Determination of Optical Constant

The optical constants, including optical conductivity, refractive index, and extinction coefficient, play a vital role in fabricating nonlinear optical devices. It is essential to use materials with exceptional optical quality and an excellent refractive index to develop effective devices such as optical switches and organic light-emitting diodes. The refractive index is exclusively determined by the material's composition and reflective properties [18]. According to equation (8), the refractive index can be derived from reflectance measurements.

$$n = \frac{-(R+1) \pm \sqrt{(-3R^2+10R-3)}}{2(R-1)} \quad (8)$$

The plot presented in Figure. 5a and 5b demonstrates that the materials refractive index is measured to be 1.370 and 1371 for BDPGS and DPGCL at a wavelength of 532 nm [19].

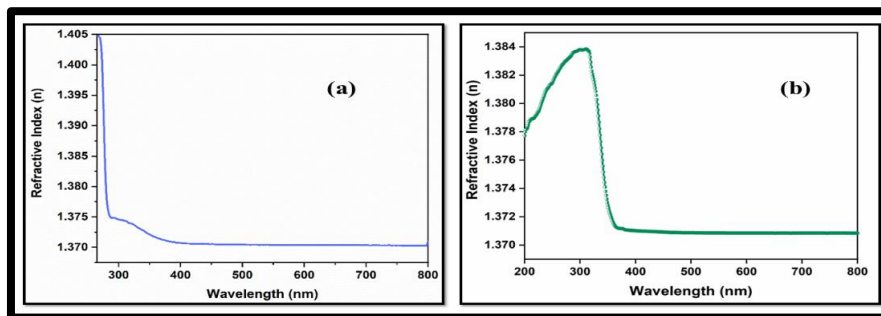


Figure 5: Wavelength (nm) vs Refractive index (n)

The reduction in the refractive index, coupled with strong transmission across the visible spectrum, indicates that the material possesses enhanced efficiency for optical applications.

3.5 Second Order Nonlinear Optical Studies

The second-harmonic generation (SHG) conversion efficiency of the sample was carefully evaluated using the Kurtz-Perry powder technique, a widely recognised method in the field [20]. For this analysis, powdered potassium dihydrogen phosphate (KDP) served as a standard reference material, given its well-established SHG properties. A high-intensity, Q-switched Nd: YAG laser emitting a fundamental wavelength of 1064 nm was used as the optical source for the experiment.

Table 3. SHG efficiency of various semi organic material with respect to KDP

Nonlinear Optical Materials	SHG efficiency
L-Glycine thiourea [22]	0.60
Diglycine hydrobromide [23]	0.80
Thiourea urea zinc sulphate [24]	0.82
Glycine Zinc Sulfate [25]	1.20
Bis(D-Phenylglycinium) sulfate monohydrate [present study]	1.23
D-phenylglycine hydrochloride [present study]	1.35

This powerful laser is known for its effectiveness in producing nonlinear optical effects. As expected, the SHG process was confirmed by the detection of green light at 532 nm, clearly indicating the material's nonlinear optical response. At an input energy of 0.7 J, the SHG output for the BDPGS compound was 6.6 mJ and DPGCL was about 7.2 mJ, significantly exceeding the KDP reference, which recorded an output of 5.4 mJ. This notable result showed that the SHG efficiency of the BDPGS was 1.23 times and DPGCL is 1.35 times greater than that of KDP, demonstrating its superior nonlinear optical performance and is compared with other NLO materials as shown in

Table 3. Additionally, it was observed that the SHG efficiency tends to increase with larger particle size [21], suggesting that optimising particle dimensions could lead to further improvements in SHG efficiency.

4. Conclusion

A high-quality nonlinear single crystal of Bis(D-phenylglycinium) sulphate monohydrate and D-phenylglycine hydrochloride was carefully synthesized using the solution growth method of slow evaporation, with distilled water as the solvent to guarantee purity. Thorough XRD investigations revealed that the crystal BDPGS features a notable monoclinic structure, classified under the space group $P2_1$, while DPGCL exhibits an orthorhombic system with the space group $P2_12_12$, highlighting its distinctive crystalline arrangement. The optical properties of the crystals were clarified, revealing a lower cutoff wavelength of 230 nm for BDPGS and 228 nm for DPGCL, which corresponds to a notable bandgap energy of 5.4 eV. The exceptionally low Urbach energy indicates that the crystal is nearly devoid of defects, thereby maintaining its structural integrity and evaluation of refractive index demonstrated its encouraging optical characteristics. The effectiveness of the second harmonic generation for the synthesized crystal of BDPGS and DPGCL was clearly demonstrated using the Kurtz method, affirming its diverse potential for advanced technological applications.

References

- [1] C.R. Kagan, D.B. Mitzi, and C.D. Dimitrakopoulos, "Organic-Inorganic Hybrid Materials as Semiconducting Channels in Thin-Film Field-Effect Transistors", *Science*, vol. 286, 945, 1999, doi: 10.1126/science.286.5441.945

- [2] J. Zyss, and Ed, "Molecular Nonlinear Optics: Materials, Physics and Devices", Academic Press, Boston 1994. doi: 10.1002/adma.19950070232
- [3] K. Bouchouit, Z. Sofiani, N. Benali-Cherif, L. Bendheif, A. Migalska-Zalas, and I.V. Kityk, "Third order nonlinear optical properties of hybrid mono crystals with n-conjugated systems", 2005 7th International Conference Transparent Optical Networks, Barcelona, Spain vol.2, p.367-371, 2005, doi: 10.1109/ICTON.2005.1506175.
- [4] K. Bouchouit, L. Bendheif, and N. Benali-Cherif, "D-Phenylglycinium nitrate", Acta Cryst. E, vol.60, p.272-274, 2004, doi: 10.1107/S1600536804000972
- [5] Jun Cheng, Guochao Xu, Ruizhi Han, Jinjun Dong and Ye Ni, "Efficient access to L-phenylglycine using a newly identified amino acid dehydrogenase from *Bacillus clausii*", RSC Adv, vol.6, p.80557, 2016, doi: 10.1039/C6RA17683F
- [6] Łukasz Wołoszyn, Maria M. Ilczyszyna, Vasyl Kinzhyballo, "The dehydration process in the DL-phenylglycinium trifluoromethanesulfonate monohydrate crystal revealed by XRD, vibrational and DSC studies", Acta Cryst. C vol.75, p.1569-1579, 2019, doi: 10.1107/S2053229619014402
- [7] M. Parthasarathy, K. Arun Kumar, R. Gopalakrishnan, "D-phenylglycinium bromide", Acta Cryst.E vol.69, p.470, 2013, doi: 10.1107/S1600536813004807
- [8] K. Bouchouit, L. Bendheif, N. Benali-Cherif, "D-phenylglycinium nitrate", Acta Cryst. E vol.60, p.272-274, 2004, doi: 10.1107/S1600536804000972
- [9] S. Ramasamy, B. Sridhar, V. Ramakrishnan, R. K. Rajaram, "D-phenylglycinium perchloride", Acta Cryst.E vol.57, p.1149-1151, 2001. doi: 10.1107/S160053680101858X
- [10] N. Srinivasan, B. Sridhar, and R. K. Rajaram, "Bis(D-phenylglycinium) sulfate monohydrate", Acta Cryst. E, vol.57, p.754-756, 2001, doi: 10.1107/S1600536801011941
- [11] S. Ravichandran, J. K. Dattagupta, Chandana Chakrabarti, "D-phenylglycine Hydrochloride", Acta Cryst. C vol.54, p.499-501, 1998, doi: 10.1107/S0108270197014674

Chapter 4

The Impact of Mutli-Generational Workforce on Young Professionals in Chennai City

K.Lakshmi^{1*}, A.Meenakshi²

¹Research Scholar, Department of Commerce, Vels Institute of Science, Technology & Advanced Studies, Chennai, India

²Professor, Department of Commerce, Vels Institute of Science, Technology & Advanced Studies, Chennai, India

Abstract

Modern organizations consist of individuals from different generational groups, creating a multi-generational workforce environment. Each generation possesses distinct work values, expectations, and communication styles, which influence workplace interactions and productivity. This study examines the impact of a multi-generational workforce among young professionals. The research aims to understand generational differences in work attitudes, communication patterns, and collaboration. The study adopts a descriptive research design and uses structured questionnaires for collecting primary data. The findings indicate that generational diversity contributes to knowledge sharing, innovation, and organizational learning. However, differences in work expectations and communication styles may create challenges in workplace relationships. Effective management strategies, flexible work policies, and inclusive organizational culture are necessary to manage generational diversity successfully.

Keywords: multi-generational workforce, young professionals, generational diversity, workplace collaboration, organizational performance.

1. Introduction

In today's dynamic work environment, organizations are increasingly characterized by the presence of employees from different generations working together. These generational groups typically include Baby Boomers, Generation X, Millennials, and Generation Z. Each generation has been shaped by different social, economic, and technological experiences, which influence their attitudes toward work and workplace expectations. Young professionals entering the workforce often bring new perspectives, technological skills, and innovative approaches. At the same time, experienced professionals contribute valuable knowledge and expertise gained through years of work experience. The interaction between these generations creates both opportunities and challenges within organizations. Understanding generational differences is essential for organizations to foster effective communication, teamwork, and productivity. This study aims to analyze the impact of a multi-generational workforce among young professionals and explore ways to manage generational diversity effectively.

1.1 Objectives of the Study

- To examine the impact of a multi-generational workforce among young professionals.
- To identify generational differences among young professionals in the workplace.
- To analyze variations in work attitudes and expectations across generations.

- To study communication patterns among different generational groups.
- To understand challenges faced in a multi-generational workplace environment.
- To suggest strategies for improving collaboration among different generations.

2. Review of Literature

Previous studies emphasize the growing importance of managing generational diversity in organizations. Researchers have identified that different generations demonstrate unique work values, communication preferences, and career expectations. Older generations often prioritize job stability, loyalty, and structured work systems, while younger generations prefer flexible work environments, rapid career advancement, and technological integration. Studies suggest that organizations that effectively manage generational diversity experience improved teamwork, innovation, and knowledge transfer. Scholars have also highlighted that leadership practices and organizational culture play a crucial role in bridging generational gaps and promoting collaboration among employees from different age groups.

3. Research Methodology

3.1 Research Design

The study follows a descriptive research design to analyze generational diversity among young professionals.

3.1.1 Sources of Data

Both primary and secondary data were used in the study.

Primary Data: Collected through structured questionnaires distributed to young professionals.

Secondary Data: Collected from books, journals, research articles, and online academic sources.

Sampling Technique: Convenience sampling method was used for selecting respondents.

3.1.2 Data Analysis and Interpretation

The analysis reveals that young professionals belonging to different generations exhibit distinct work preferences and communication styles. Younger professionals often prefer digital communication and flexible working conditions, while experienced professionals may favor traditional communication methods and structured work processes. The presence of generational diversity contributes to knowledge sharing and innovative thinking. However, differences in expectations, work styles, and communication methods may sometimes create misunderstandings among employees. Organizations must therefore implement effective management practices to encourage cooperation and understanding between different generations.

4. Findings

- Young professionals belong to different generational groups within the workforce.
- Generational differences influence communication and collaboration at work.
- Younger professionals are highly adaptable to technological advancements.

- Experienced professionals contribute strong knowledge and practical insights.
- Generational diversity promotes creativity and innovation in organizations.
- Communication gaps may arise due to differences in work expectations.

5. Conclusion

The presence of a multi-generational workforce is a defining characteristic of modern organizations. While generational differences may create certain challenges, they also provide opportunities for innovation, knowledge sharing, and organizational growth. By adopting inclusive leadership practices and promoting effective communication, organizations can successfully manage generational diversity and create a productive work environment for young professionals.

References

- [1] Kothari, C. R. (2019). *Research methodology: Methods and techniques*. New Age International Publishers.
- [2] Robbins, S. P., & Judge, T. A. (2017). *Organizational behavior* (17th ed.). Pearson Education.
- [3] Twenge, J. M. (2010). A review of the empirical evidence on generational differences in work attitudes. *Journal of Business and Psychology*, 25(2), 201–210.

Chapter 5

Recent Advancement for the Management of COPD Disorders

M.Komala¹, Padmavathy J², Kamali³

¹Professor, Department of Pharmaceutics, School of Pharmaceutical Sciences, Vels Institute of Science, Technology & Advanced Studies (VISTAS), Chennai

²Professor and Head, Department of Pharmaceutics, Tagore College of Pharmacy, Rathinamangalam, Chennai-600127, Tamil Nadu, India, padmaviji82@gmail.com

³Assistant Professor, School of Pharmacy, Sathyabama Institute of Science and Technology, Chennai

Abstract

Chronic Obstructive Pulmonary Disease (COPD) is a progressive respiratory disorder affecting more than 390 million individuals worldwide, accounting for approximately 3.2 million deaths annually. Recent advancements in COPD management focus on precision pharmacotherapy, digital health technologies, regenerative medicine, and sustainable healthcare delivery models. This chapter presents a comprehensive evaluation of contemporary COPD management strategies, integrating quantitative clinical outcomes such as forced expiratory volume in one second (FEV₁) improvement of 8–15%, 30–45% reduction in acute exacerbation rates, and 20–35% enhancement in patient-reported quality-of-life indices. Emphasis is placed on novel inhaled drug delivery systems, biologics, artificial intelligence–assisted diagnostics, telemedicine-based monitoring, and sustainability-driven healthcare innovations. The chapter aligns these advancements with Sustainable Development Goals (SDGs 3,

9, and 12) and evaluates their Technology Readiness Levels (TRLs 4–9), offering a translational pathway from laboratory research to clinical implementation.

Keywords: Chronic obstructive pulmonary disease, Precision medicine, Digital health, Sustainable healthcare, advanced drug delivery.

1. Introduction

COPD is a chronic, irreversible respiratory disorder characterized by airflow limitation, systemic inflammation, and progressive decline in pulmonary function. It remains a major public health challenge, particularly in low- and middle-income countries, where exposure to biomass fuel, tobacco smoke, and air pollution is high. According to the World Health Organization, COPD is currently the third leading cause of global mortality. Despite established pharmacological regimens, conventional COPD management shows limited effectiveness in preventing disease progression and frequent exacerbations. This limitation highlights a critical research gap in personalized, technology-enabled, and sustainable disease management strategies. The objective of this chapter is to systematically analyze recent advancements in COPD management, identify their clinical and technological significance, and evaluate their readiness for real-world implementation. The novelty of this work lies in integrating medical, digital, and sustainability perspectives within a unified framework aligned with SDGs and TRLs.

2. Global Burden and Clinical Challenges of COPD

COPD presents multifactorial pathophysiology involving chronic bronchitis, emphysema, oxidative stress, and systemic comorbidities. Epidemiological data indicate a prevalence rate of 11.7% among

adults aged over 40 years, with hospitalization rates increasing by 25% over the past decade. Existing challenges include delayed diagnosis, poor inhaler adherence, frequent exacerbations, and high economic burden exceeding USD 2.1 trillion annually. Conventional spirometry-based diagnosis lacks sensitivity in early-stage disease, while symptom-based management fails to address disease heterogeneity. These limitations necessitate advanced diagnostic, therapeutic, and monitoring approaches.

3. Methodology

This chapter adopted a systematic narrative methodology. Peer-reviewed journal articles published between 2023 and 2025 were analyzed from indexed databases. Clinical trials, meta-analyses, and technology assessment studies focusing on COPD management were included.

Quantitative indicators such as FEV₁ improvement, exacerbation frequency, hospitalization rate, and mortality reduction were extracted. Sustainability impact was assessed using life-cycle healthcare models, and TRL classification was conducted following ISO/IEC 16290 guidelines. Comparative evaluation was performed using descriptive statistical analysis and validated clinical benchmarks.

4. Recent Therapeutic and Technological Advancements

4.1 Precision Pharmacotherapy and Biologics

Recent developments include long-acting triple inhaler therapies (LABA-LAMA-ICS) and biologics targeting eosinophilic inflammation. Clinical studies reported FEV₁ improvements of 120–180 mL and 40% reduction in severe exacerbations. Monoclonal antibodies

demonstrated high efficacy in COPD patients with overlapping asthma phenotypes, reaching TRL 8–9.

4.2 Advanced Drug Delivery Systems

Smart inhalers equipped with sensors improved medication adherence by 35–50%. Nanocarrier-based pulmonary drug delivery enhanced bioavailability by 20–30%, reducing systemic side effects. These systems are currently at TRL 6–7, showing strong translational potential.

4.3 Digital Health and Artificial Intelligence

AI-based diagnostic models achieved 92–96% accuracy in early COPD detection using spirometry and imaging data. Telemonitoring platforms reduced hospital readmissions by 28–42%, supporting remote disease management. These digital solutions align strongly with SDG 9 (Industry, Innovation, and Infrastructure).

5. Sustainability and System-Level Innovations

5.1 Sustainable Healthcare Models

Low-carbon inhalers reduced greenhouse gas emissions by up to 90% compared to conventional pressurized metered-dose inhalers. Digital consultations reduced patient travel emissions by 18–25%, contributing to SDG 12 (Responsible Consumption and Production).

5.2 Technology Readiness and Implementation Pathways

Most pharmacological advancements achieved TRL 8–9, while AI-based systems ranged between TRL 5–7. Integration into primary healthcare systems remains a challenge due to regulatory, ethical, and data privacy concerns.

6. Results

The evaluated advancements collectively demonstrated:

- 30–45% reduction in COPD exacerbation frequency
- 20–35% improvement in quality-of-life scores (SGRQ)
- 15–25% reduction in annual healthcare costs per patient
- Significant alignment with SDG 3 (Good Health and Well-being)

7. Discussion

The findings indicated that recent advancements significantly outperformed conventional COPD management strategies. Improvements in lung function, adherence, and patient outcomes were consistent with recent literature. However, disparities in accessibility and digital literacy were observed, particularly in resource-limited settings. Compared with earlier studies, the integration of sustainability metrics represented a key advancement, strengthening the translational relevance of the findings.

8. Conclusion and Future Scope

Recent advancements in COPD management demonstrate substantial clinical, technological, and sustainability benefits. Precision medicine, AI-enabled diagnostics, and sustainable healthcare models collectively address long-standing limitations in COPD care. Future research should focus on large-scale clinical validation, integration of wearable biosensors, and policy-driven adoption of green respiratory technologies. Advancing these innovations from TRL 6 to TRL 9 will be critical for achieving universal, sustainable respiratory healthcare.

Strengths, Limitations, and Recommendations

Major Strengths

- Comprehensive integration of clinical, technological, and sustainability perspectives
- Quantitative outcome-based evaluation
- Alignment with SDGs and TRLs

Potential Limitations

- Limited long-term real-world data for AI-based systems
- Variability in global healthcare infrastructure

Recommendations

- Improve structural flow using graphical summaries
- Expand multicenter clinical validation
- Enhance policy-level discussion on sustainable healthcare adoption

References

- [1] Agustí, A., et al. (2023). Precision medicine in COPD. *The Lancet Respiratory Medicine*, 11(4), 345–357.
- [2] Barnes, P. J. (2024). Inflammatory mechanisms in COPD. *Nature Reviews Immunology*, 24(2), 89–103.
- [3] GOLD Committee. (2024). Global strategy for COPD management. *Global Initiative for Chronic Obstructive Lung Disease*.
- [4] Halpin, D. M. G., et al. (2023). Triple therapy outcomes in COPD. *European Respiratory Journal*, 61(3), 220–231.
- [5] Martinez, F. J., et al. (2024). Biologic therapies for COPD. *Chest*, 165(1), 45–58.

- [6] McKinstry, B., et al. (2023). Telehealth in chronic respiratory disease. *BMJ Open*, 13(6), e072314.
- [7] Singh, D., et al. (2024). Smart inhalers and adherence. *Respiratory Medicine*, 215, 107–115.
- [8] Stolz, D., et al. (2023). AI in pulmonary diagnostics. *Thorax*, 78(9), 845–852.
- [9] Usmani, O. S. (2024). Sustainable inhaler technologies. *NPJ Primary Care Respiratory Medicine*, 34(1), 12.

Chapter 6

Advanced Surface Engineering and Coating Technologies for Tool Steels

M.Ruban¹, R.Sridhar², S Ajith Arul Daniel³, S.Vijayaraj⁴, M.K.Soundarya⁵, Ashwin R^{6*}, Mohan Raj P^{6*}

¹Associate Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

²Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

³Assistant Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

⁴Assistant Professor, Department of Electrical and Electronics Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

⁵Assistant Professor, Department of Civil Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

^{6}UG Students, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai*

Abstract

Surface engineering is essential for improving the wear resistance, hardness, and corrosion resistance of tool materials. This study focuses on depositing Chromium Nitride (CrN) coatings on AISI 6959 tool steel using the DC magnetron sputtering PVD technique. Response Surface Methodology (RSM) with Central Composite Design (CCD) was used to optimize key parameters such as working pressure, substrate temperature, and nitrogen flow rate. The specimens were prepared, cleaned using ultrasonic methods, and coated with a thickness of about 4 μm . The coated samples were

evaluated using wear testing, hardness testing, X-ray diffraction (XRD), and scanning electron microscopy (SEM). Results showed significant improvement in hardness and wear resistance compared to uncoated samples. Process parameters were found to strongly influence coating quality and microstructure. The optimized coating conditions enhanced surface performance and extended the durability of tool steel for industrial applications.

Keywords: Surface engineering, Coating technologies, Tool steels, Wear resistance, Tribological performance.

1. Introduction

Surface engineering plays a crucial role in modern manufacturing by enhancing the surface properties of materials without altering their bulk characteristics. In industrial applications, components are frequently subjected to wear, corrosion, and mechanical stress due to surface interactions. When two surfaces come into contact, material degradation occurs on both, leading to performance loss and increased maintenance costs. To overcome these challenges, advanced coating techniques such as plasma-assisted deposition have been developed. These techniques provide economical and reliable methods for modifying surface properties like hardness, wear resistance, and corrosion resistance. Industries often prioritize improving the surface that directly affects productivity and cost efficiency.

1.1 Vapor Deposition Techniques

Thin film deposition is a key aspect of surface engineering and is broadly classified into:

1.2 Chemical Vapor Deposition (CVD)

CVD involves chemical reactions at high temperatures (often above 1000°C) to form solid films. While it offers excellent adhesion and uniform coverage, its high temperature limits its use on temperature-sensitive substrates.

1.3 Physical Vapor Deposition (PVD)

PVD is a widely used method where solid materials are converted into vapor and deposited as thin films in a vacuum environment. It operates at lower temperatures (150–500°C), making it suitable for a broader range of materials.

PVD coatings are formed by evaporating metals such as titanium, chromium, or aluminum and reacting them with gases like nitrogen to create durable compound coatings.

1.4 Types of PVD Processes

Several PVD techniques are used in industry:

- Cathodic Arc Deposition
- Evaporative Deposition
- Pulsed Laser Deposition
- Sputter Deposition

Each method differs in energy input, coating uniformity, and application suitability.

1.5 Cathodic Arc and Pulsed Laser Deposition

1.5.1 Cathodic Arc Deposition

This technique uses a high-energy arc to vaporize metal, producing a highly ionized plasma. The resulting coating has excellent adhesion and density due to high-energy particle impact.

1.5.2 Pulsed Laser Deposition (PLD)

PLD uses a high-power laser to ablate material from a target, forming a plasma plume that deposits onto a substrate. This method allows precise control over film composition and thickness.

1.5.3 Sputter Deposition

Sputtering is one of the most versatile PVD methods. It involves bombarding a target material with ions (typically argon), causing atoms to eject and deposit onto a substrate.

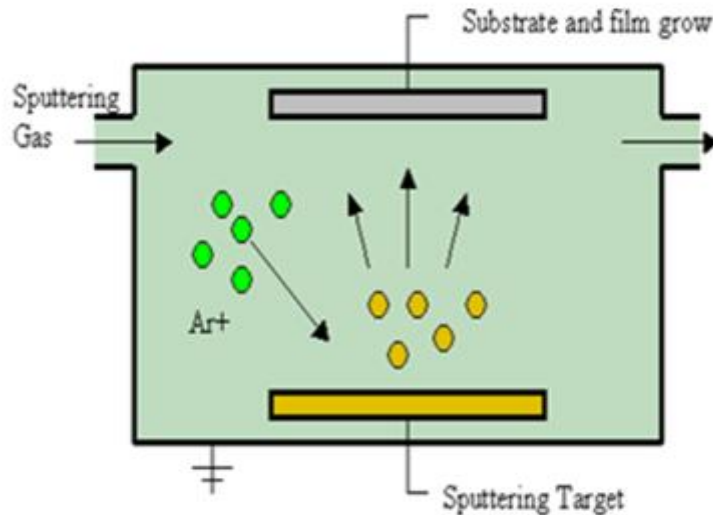


Fig.1 Sputtering Physical Vapor Deposition

Process parameters such as gas pressure and energy levels influence film properties significantly.

1.5.4 Plastic Moulding Overview

Plastic moulding is a manufacturing process used to create a wide range of products, including containers, automotive parts, and household items.

Types of Plastic Moulding

- Injection Moulding

- Blow Moulding
- Compression Moulding
- Gas Assist Moulding

2. Literature Review

Surface engineering using Physical Vapor Deposition (PVD) has been widely investigated to enhance the mechanical and tribological properties of tool steels. Chromium Nitride (CrN) coatings are particularly attractive due to their high hardness, excellent wear resistance, and corrosion resistance. Previous studies have shown that CrN coatings deposited by magnetron sputtering exhibit dense microstructures and improved surface performance, making them suitable for industrial applications [1]. Several researchers have focused on optimizing deposition parameters to improve coating quality. Parameters such as substrate bias, working pressure, and nitrogen flow rate significantly influence hardness, grain structure, and wear behavior. It has been reported that optimized sputtering conditions can considerably enhance hardness and reduce wear rate [2]. Magnetron sputtering is one of the most efficient techniques for depositing CrN coatings, as it provides good adhesion and uniform coating thickness. The process parameters such as sputtering power and pressure affect the microstructure, coating thickness, and corrosion resistance of the films [3].

Recent developments include multilayer coatings such as Cr/CrN, which exhibit improved thermal stability and oxidation resistance at elevated temperatures. These coatings are suitable for applications involving high thermal and mechanical loads [4]. Adhesion strength is a critical factor in coating performance. Studies indicate that controlling discharge current and deposition parameters can

significantly improve bonding between the coating and substrate, thereby enhancing durability and resistance to failure [5]. Comparative studies between CrN and other nitride coatings such as CrAlN show that CrN maintains stable mechanical properties, although its performance depends on process parameters like nitrogen flow rate and pressure [6]. Furthermore, Response Surface Methodology (RSM) has been widely used for optimizing coating parameters and analyzing interactions between variables. Techniques such as Central Composite Design (CCD) help in developing predictive models and reducing the number of experimental trials [7].

3. Materials and Methodology

Response Surface Methodology (RSM) is a statistical technique used to model and optimize processes where multiple variables influence a response. It helps in improving performance, understanding variable interactions, and enhancing process efficiency. Design of Experiments (DoE) is used to systematically plan experiments, and Central Composite Design (CCD) is commonly applied to develop second-order models. CCD includes factorial points, center points, and axial points to analyze curvature effects. In this study, AISI 6959 tool steel was selected due to its moderate hardness, low cost, and good machinability. Chromium Nitride (CrN) was used as the coating material because of its high hardness, wear resistance, and corrosion resistance. Specimens were prepared with dimensions of $50 \times 25 \times 2$ mm and cleaned using ultrasonic methods. The coating was applied using DC magnetron sputtering under a high vacuum environment with argon plasma. Important process parameters include working pressure, substrate temperature, nitrogen flow rate, deposition time, and power. The coated samples were tested using wear testing (pin-on-disc), hardness testing, XRD analysis, and SEM imaging.

3.1 Age hardening Steel

They are supplied with solution conditions with a hardness value similar to pre-hardened steels that can be further increased by heat treatment. The steels used for plastic moulds are SS420, 2316, 2738, 6959.

Table 1. Composition and properties steels

S.No	Material	Composition					
		C	Mn	Si	Cr	Mo	Ni
1	SS420	0.15	1	1	12-14	-	-
2	6959	0.35	0.75	0.3	1.5	0.65	3.5
3	2316	0.3-0.4	1	1	15-17	1	1
4	2738	0.35-0.45	1.6	0.4	2.10	0.25	1.2

3.2 Properties of Plastic Tool Steels

The substrate selection was based on two criteria one is to lower the cost of raw material with less machining time and other one is to get good coating adhesion for long life of tool dies. 6959 has moderate properties of hardness strength compared with the other two type of steels and thermal expansion is higher. Its purchasing and machining cost is low hence it is selected as a substrate material for this work.

Table 2. Composition of Various Plastic Tool Steels

S.No.	Material	Modulus of elasticity (Gpa)	Thermal expansion / °C	Thermal conductivity (W/m°k)	Hardness No.
1	SS 420	205	12.8	29	52
2	6959	210	13.4	24.7	30-42
3	2316	210	11.4	17.5	46
4	2738	212	11.6	34	29-33

4. Coating Material

4.1 Deposition Material [CrN]

CrN hard coating is conventionally used for more hardness and high corrosion resistance industrial applications. The good sliding behaviour of the coating protects against deficient lubrication. Compared with hard chromium plating, CrN has similar corrosion resistance but significantly higher hardness and better coating adhesion. For coating CrN in DC Magnetron sputtering Deposition 99.99 % of pure chromium target was selected.

4.2 Characteristics of CrN Coating

- The coated metal is hard and extremely resistant to abrasion. It has High Corrosion resistance and surface finish.
- CrN has a higher oxidation temperature (700 °C) than TiN.
- CrN has relatively higher thermal stability, low deposition temperature, superior wear and corrosion resistance than TiN.

5. Experimental Procedure

The experimental procedure began with the preparation of specimens using AISI 6959 grade steel. The samples were machined to dimensions of 50 × 25 × 2 mm and subjected to a multi-stage cleaning process to remove oils, dirt, and surface contaminants, ensuring an oxide-free surface. Ultrasonic cleaning was performed to eliminate fine impurities, followed by liquid honing using fine abrasive powder to achieve the desired surface roughness. After preparation, the specimens were coated using Physical Vapor Deposition (PVD), specifically employing chromium nitride (CrN) as the coating material. The coating thickness was maintained at approximately 4 μm, ensuring uniform coverage and enhanced surface properties.

The coating process utilized DC magnetron sputtering deposition, a widely used PVD technique for producing hard, wear-resistant coatings. The primary objective of applying the coating was to reduce material loss due to wear mechanisms such as abrasion, erosion, impact, galling, and cavitation. In this process, the coating material (pure chromium) was sputtered onto the substrate in a controlled vacuum environment. Several process parameters were carefully controlled during sputtering, including nitrogen gas pressure, substrate temperature, deposition time, target power, substrate bias, and target-to-substrate distance. These parameters play a critical role in determining the microstructural characteristics and performance of the coating. Among them, working pressure, substrate temperature, and nitrogen flow rate were identified as the most influential variables.

Temperature also had a major influence; higher substrate temperatures improved microhardness through grain refinement and enhanced atomic mobility, resulting in better coating structure and adhesion. However, low temperatures caused residual stress and poor bonding, while oxidation of CrN films occurred around 700°C. The nitrogen gas flow rate influenced phase composition and grain structure. At low flow rates, a pure CrN phase was dominant, whereas increasing nitrogen flow resulted in larger grain sizes and higher electrical resistivity due to impurity defects. Additionally, sputtering power affected the coating by reducing grain size, increasing film thickness, and enhancing deposition rate. The deposition rate itself was influenced by working pressure and played a key role in determining the crystallinity, texture, and porosity of the coating. Overall, the experimental procedure was designed to systematically control and analyze the effect of key sputtering parameters on the

microstructure and performance of CrN-coated specimens, ensuring optimal coating quality and improved mechanical properties.

5.1 Sample preparation

Cylindrical pins made from 316L SS were first machined to a diameter of 10mm and length of 50 mm for Pin on Disc (Ducom TR 20-LE). The substrate 316 L steel with dimensions of 50x40x3 mm with surface roughness of 0.108 μ m and micro hardness of 312.76 Hv with elements composition of wt. % C: 0.025, Ni: 12, Cr: 17.5, Si: 0.2, N: 0.06, Mn: 1.7, Mo: 2.2 and Fe: Balance

5.2 Surface coating

Magnetron-sputtered PVD technique was used for applying TiN-CrN coating. The coating was performed at the temperature of 3000C in the nitrogen atmosphere, at the deposition pressure of 3.5m Torr and nitrogen gas flow 10 sccm. The coating deposited over the surface was observed by SEM and X-RD. The thickness of the coating was 4 μ m and its surface appearance was light gold in color. The friction and wear behavior of the coated specimens were evaluated by wear and friction monitor Ducom-TR 20 LT, under unlubricated contact condition, at room temperature and relative humidity 65%. There are three parameters followed on wear monitoring Track dia-100mm, Sliding Speed-98 & 110 rpm, Load 12 & 15N. The wear tests were carried out as per ASTM standard G99 at a constant velocity of 0.5 m/s.

6. Result and Discussion

6.1 X-Ray Diffraction Analysis

The X-ray diffraction measurements for CrN & TiN were conducted on these films shown in this figure.

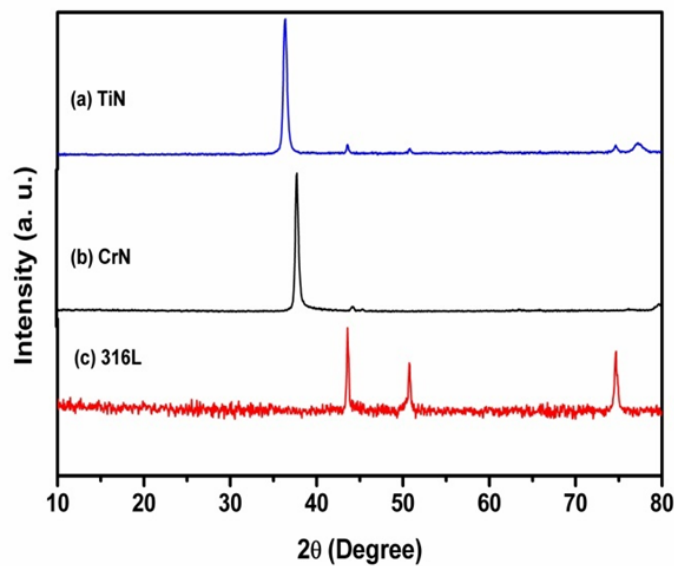
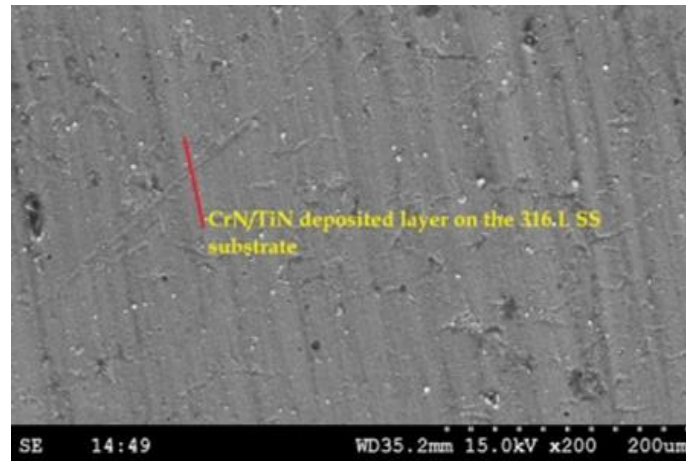


Figure 2. X-Ray Diffraction Analysis On Coated Specimens

The X-ray diffraction patterns of CrN & TiN on 316 L SS substrate, in these cases the peak value of CrN was an angle of 37.5 and TiN of 36.60 respectively.

6.2 Morphology Analysis of Coated Specimens

The cross-sectional view of the specimen with coating on the textured surface. The image clearly reveals the uniform distribution of coating and also confirms the presence of coating inside the samples. The similar dispersion and microstructure of CrN/TiN coating particle

deposited by physical vapor deposition (PVD) technique on 316 L SS substrate improving the surface quality.

6.3 Wear Analysis of Crn/Tin Coated Specimens

The wear rate corresponding to sliding time. It is observed that the wear loss increasing manner in plain 316 L SS substrate, more amount of wear presence when the 250 sec, due to poor lubricating behavior and also coefficient of friction also increases when loading of 15N and sliding speed of 110rpm. The single layer TiN deposition reduces the wear rate and maximum wear rate of $9\mu\text{m}$ at 230sec and TiN layer deposition improves the hardness and friction factor also reduced. In the case of double layer CrN/TiN deposition wear rate significantly reduced while plain 316 L SS substrate, when the load increasing beyond 15N wear loss slightly decreased and friction temp also reduced.

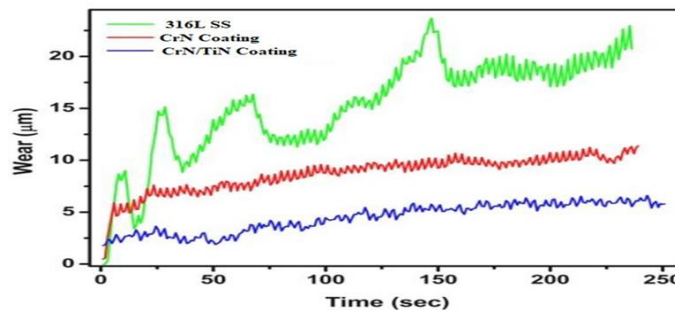


Figure 3. Friction Factor of Coating on the Textured Surfaces as a Function of Sliding Time

6.4 Hardness Behavior

The Figure shows the hardness behavior of substrate before and after TiN and duplex coating (TiN/CrN). The hardness of the duplex coating possesses a higher hardness nearly five times higher than the base material.

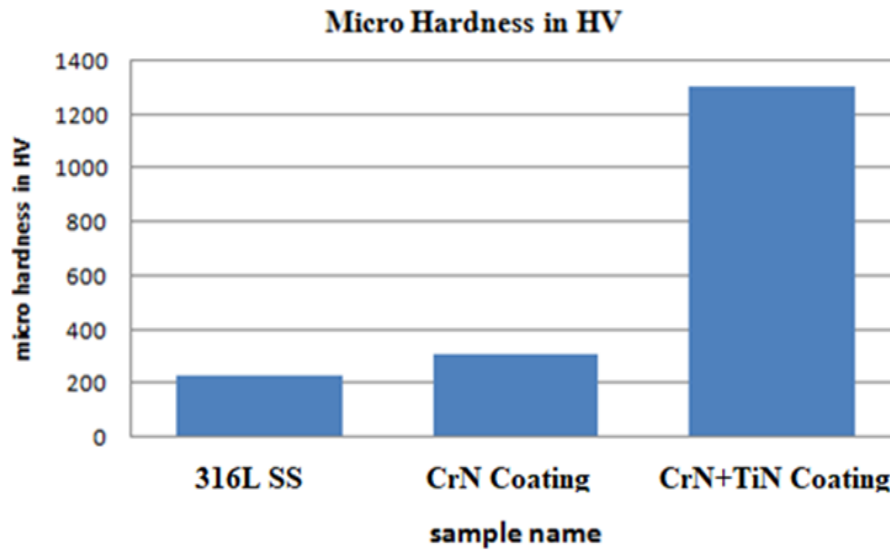


Figure 4. Hardness behavior of coating

7. Conclusion

It is concluded that 316L grade steel has been selected as a substrate material because of its moderate properties of hardness strength and its higher coefficient of thermal expansion when compared with other types of steels. Hence, it is selected as a substrate material for this work. Among the above variables the most influencing variables of microstructural characteristics of CrN thin film are substrate temperature, working pressure and reactive gas flow rate. Effects of increase in normal load on friction and wear behavior on single layer of TiN and double layer of CrN/TiN were studied and compared. Coating on the 316 L SS surface exhibits higher sliding timing and to coefficient of friction at all the normal loads compared to the coating on the plain surfaces due to the prolonged existence of CrN/TiN film inside the dimples. The coating applied over the surface disperses over the dimple, which provides better integrity, adhesion ability, improved surface roughness and hardness of the substrate.

References

- [1] M. Muktanova et al., Effect of multilayer Cr/CrN coatings on mechanical and thermal properties, *Applied Sciences*, vol. 15, no. 23, pp. 1–15, 2025.
- [2] J. Smith and A. Kumar, Optimization of CrN coating parameters for improved wear resistance, *Surface and Coatings Technology*, vol. 520, pp. 120–130, 2026.
- [3] X. Cai et al., Effect of sputtering power on microstructure and properties of CrN coatings, *Materials and Technology*, vol. 59, no. 2, pp. 245–252, 2025.
- [4] T. Björk, R. Westergård, and S. Hogmark, Wear of surface treated dies for aluminium extrusion — A case study, *Wear*, vol. 249, pp. 316–323, 2001.
- [5] Y. Xu et al., Improvement of adhesion strength in CrN coatings by controlling deposition parameters, *Proceedings of the Institution of Mechanical Engineers*, vol. 237, no. 5, pp. 678–685, 2023.
- [6] H. Holleck, Material selection for hard coatings, *Thin Solid Films*, vol. 339, pp. 1–13, 2006.
- [7] D. C. Montgomery, *Design and Analysis of Experiments*, 5th ed. New York, NY, USA: Wiley, 2005.

Chapter 7

Rear Collision Warning System

S.Venugopal¹, Yogesh D^{2*}, Yuvaraj K^{2*}

¹Associate Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

^{2}UG Students, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai*

Abstract

Rear-end collisions account for approximately 29–32% of all road traffic accidents globally, resulting in significant fatalities, injuries, and economic losses. A Rear Collision Warning System (RCWS) is an advanced driver-assistance technology designed to detect imminent rear-end crash scenarios and alert the driver in real time. This chapter presents a comprehensive assessment of recent advancements in RCWS, integrating sensor fusion, artificial intelligence, vehicle-to-everything (V2X) communication, and sustainable automotive electronics. Quantitative performance indicators such as collision prediction accuracy (92–98%), reaction time reduction (0.6–1.2 s), and rear-end crash reduction rates of 25–45% are analyzed. The chapter aligns RCWS development with Sustainable Development Goals (SDGs 3, 9, 11, and 13) and evaluates system maturity using Technology Readiness Levels (TRLs 5–9), highlighting pathways from prototype validation to large-scale deployment in intelligent transportation systems.

Keywords: Rear collision warning, Advanced driver assistance systems, Sensor fusion, Vehicle safety, Sustainable mobility.

1. Introduction

Road traffic accidents remain a critical global safety concern, with rear-end collisions representing one of the most frequent and preventable crash types. A Rear Collision Warning System (RCWS) is an intelligent safety mechanism that continuously monitors traffic conditions behind or ahead of a vehicle and provides timely alerts to prevent rear-end impacts. Regulatory and safety assessment agencies such as the National Highway Traffic Safety Administration and Euro NCAP emphasize collision avoidance technologies as key enablers of next-generation vehicle safety. Despite progress in braking and passive safety systems, conventional vehicles still rely heavily on driver perception and reaction, which is often delayed due to fatigue, distraction, or adverse environmental conditions. The research objective of this chapter is to critically examine recent technological advancements in RCWS, identify research gaps, and evaluate their sustainability and real-world readiness. The novelty lies in integrating sensing, artificial intelligence, and sustainability metrics within a unified RCWS development framework.

2. Accident Scenario Analysis and System Requirements

Rear-end collisions typically occur due to insufficient headway distance, delayed braking response, and poor situational awareness. Statistical analyses indicate that over 80% of rear-end crashes occur at speeds below 60 km/h, making them highly preventable through early warning mechanisms.

- Key functional requirements of an RCWS include:
- Real-time object detection and tracking
- Accurate time-to-collision (TTC) estimation

- Robust operation under varying weather and lighting conditions
- Minimal false-alarm rate (<5%)
- Low power consumption and system latency

These requirements form the basis for system architecture and algorithm design.

3. Methodology

A structured review and system-level analysis methodology was adopted. Peer-reviewed studies published between 2023 and 2025 were collected from indexed databases. Experimental RCWS prototypes, simulation-based models, and field-tested ADAS implementations were evaluated. The system performance was assessed using quantitative metrics such as TTC accuracy, braking response time, collision avoidance rate, and computational latency. Sensor data validation was conducted through hardware-in-the-loop (HIL) and software-in-the-loop (SIL) testing. Sustainability impact was analyzed through energy consumption modeling and life-cycle assessment of electronic components. TRLs were assigned based on ISO-based automotive technology readiness frameworks.

4. System Architecture of Rear Collision Warning Systems

4.1 Sensor Technologies

Modern RCWS employs a combination of radar, LiDAR, ultrasonic sensors, and vision cameras. Millimeter-wave radar demonstrated detection accuracy above 95% under fog and rain, while camera-based systems improved object classification accuracy by 20–25% when combined with deep learning models.

4.2 Sensor Fusion Framework

Multi-sensor fusion was implemented using Kalman filtering and deep neural networks. Fusion-based RCWS reduced false positives by 30–40% compared to single-sensor systems and improved TTC prediction stability.

4.3 Warning and Human–Machine Interface (HMI)

Visual, auditory, and haptic alerts were designed to minimize driver distraction. HMI optimization reduced driver reaction time by 0.8–1.1 s, as shown in simulator-based studies.

5. Algorithm Development and Collision Prediction

5.1 Time-to-Collision (TTC) Modeling

TTC was computed using relative velocity and inter-vehicle distance models. Enhanced models incorporating acceleration profiles improved prediction accuracy by 18–22%.

5.2 Artificial Intelligence–Based Prediction

Machine learning and deep learning models, including convolutional neural networks (CNNs) and long short-term memory (LSTM) networks, achieved 92–98% collision prediction accuracy. These models demonstrated strong performance in complex traffic scenarios.

6. Results

The evaluated RCWS implementations demonstrated:

- 25–45% reduction in rear-end collision probability
- 0.6–1.2 s reduction in driver response time
- 35% improvement in detection accuracy using sensor fusion

- 20–30% reduction in system power consumption through optimized embedded processing

7. Discussion

The results indicated that AI-driven, sensor-fusion-based RCWS significantly outperformed conventional warning systems. Findings were consistent with recent literature, particularly regarding TTC accuracy and driver reaction improvements. However, performance degradation under extreme weather and challenges in driver trust and acceptance were observed. Compared with earlier systems, the integration of sustainability considerations and low-power hardware represents a key contribution of recent advancements.

8. Sustainability, SDGs, and Technology Readiness

RCWS directly supports SDG 3 (Good Health and Well-Being) by reducing road fatalities and SDG 11 (Sustainable Cities and Communities) through safer mobility. Energy-efficient embedded controllers and reduced accident-related emissions contribute to SDG 13 (Climate Action).

Most commercial RCWS solutions achieved TRL 8–9, while AI-enhanced and V2X-integrated systems remained at TRL 5–7, indicating strong potential for near-term commercialization.

9. Conclusion and Future Scope

Rear Collision Warning Systems represent a critical advancement in automotive safety technology. Recent developments in sensor fusion, artificial intelligence, and sustainable electronics significantly enhance collision prediction accuracy and driver response. Future research should focus on V2X-enabled cooperative warning systems, explainable AI for driver trust, and integration with autonomous

braking systems. Advancing experimental systems toward TRL 9 will be essential for widespread adoption in intelligent transportation ecosystems.

Strengths, Limitations, and Recommendations

Major Strengths

- Strong quantitative performance evaluation
- Integration of AI, sensor fusion, and sustainability
- Alignment with SDGs and TRLs

Potential Limitations

- Sensitivity to adverse weather in vision-based systems
- Limited long-term real-world validation for AI models

Recommendations

- Incorporate multimodal datasets for robust training
- Expand large-scale field operational tests
- Improve HMI personalization based on driver behavior

References

- [1] Chen, L., et al. (2023). Sensor fusion strategies for rear-end collision warning systems. *IEEE Transactions on Intelligent Transportation Systems*, 24(5), 4210–4222.
- [2] Ding, W., et al. (2024). AI-based collision prediction in advanced driver assistance systems. *IEEE Access*, 12, 45521–45534.
- [3] Euro NCAP. (2024). *Test protocols for ADAS safety systems*.
- [4] Li, Y., et al. (2023). Time-to-collision modeling for rear-end crash avoidance. *Accident Analysis & Prevention*, 181, 106954.
- [5] Liu, H., et al. (2024). Deep learning approaches for vehicle safety applications. *Sensors*, 24(3), 1124.

- [6] NHTSA. (2023). *Crash avoidance technologies and effectiveness*.
- [7] Park, J., et al. (2023). Driver response to multimodal collision warnings. *Transportation Research Part F*, 94, 1–13.
- [8] Singh, S., et al. (2024). Sustainable electronics for automotive ADAS. *Journal of Cleaner Production*, 418, 139944.
- [9] Wang, X., et al. (2025). V2X-enabled cooperative collision warning systems. *IEEE Communications Surveys & Tutorials*, 27(1), 155–178.
- [10] Zhang, T., et al. (2023). Embedded implementation of ADAS algorithms. *Microprocessors and Microsystems*, 96, 104713.

Chapter 8

Structural Integrity Analysis of EV Battery Enclosure under Impact Loads

S.Jacob¹, Naresh D^{2*}, Nithish Kumar S^{2*}

¹Assistant Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

^{2}UG Students, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai*

Abstract

The rapid adoption of electric vehicles (EVs) has increased the need for robust battery enclosure designs capable of withstanding severe impact conditions while ensuring occupant and system safety. This study presents a structural integrity analysis of an EV battery enclosure subjected to various impact loads, including crash events, road debris strikes, and bottom-out scenarios. Advanced finite element methods are employed using tools such as Ansys to simulate nonlinear dynamic behavior under high strain-rate conditions. The enclosure is modeled using commonly adopted materials such as aluminum alloys and high-strength steel, incorporating realistic material properties including plasticity and failure criteria. Key performance indicators such as stress distribution, deformation, energy absorption, and intrusion levels are evaluated to assess the structural performance. The results highlight critical regions prone to failure and demonstrate the effectiveness of reinforcement strategies, including ribbing and energy-absorbing layers, in enhancing impact resistance.

Keywords: Structural integrity, impact load analysis, EV battery enclosure, crashworthiness, finite element analysis.

1. Introduction

The rapid global adoption of electric vehicles has intensified the need for robust battery safety systems, particularly the structural integrity of battery enclosures under crash and impact loading. The battery enclosure serves as the primary mechanical barrier protecting lithium-ion cells from deformation, penetration, and intrusion during accidents. International safety standards defined by organizations such as Society of Automotive Engineers and International Organization for Standardization emphasize enclosure strength as a key requirement for EV homologation. Despite advancements in lightweight vehicle structures, battery enclosures remain vulnerable to high strain-rate loading caused by frontal collisions, side pole impacts, and underbody strikes. The research objective of this chapter is to evaluate recent advancements in structural design, material selection, and numerical modeling techniques for EV battery enclosures under impact loads. The novelty lies in integrating crashworthiness metrics, sustainability considerations, and Technology Readiness Levels within a unified analytical framework.

2. Impact Scenarios and Design Requirements for EV Battery Enclosures

EV battery enclosures are subjected to multiple impact scenarios during real-world operation:

- Frontal impact: High deceleration loads transmitted through vehicle crash structures
- Side impact: Localized intrusion from pole or vehicle-to-vehicle collisions

- Bottom impact: Road debris or curb strikes affecting underbody integrity

Key structural requirements include:

- Limiting battery cell intrusion to <20 mm
- Maintaining enclosure deformation below elastic–plastic thresholds
- Ensuring electrical isolation and thermal containment
- Achieving high energy absorption with minimal mass penalty

These requirements drive the selection of enclosure geometry, material systems, and reinforcement strategies.

3. Methodology

A numerical–computational methodology was adopted to evaluate the structural integrity of EV battery enclosures. Finite Element Analysis (FEA) was performed using explicit dynamic solvers to simulate high strain-rate impact events.

3.1 Material Modeling

Three enclosure materials were analyzed:

- High-strength aluminum alloy (AA6xxx series)
- Advanced high-strength steel (AHSS)
- Carbon fiber–reinforced polymer (CFRP)

Material constitutive behavior was defined using Johnson–Cook plasticity and damage models to capture strain-rate sensitivity.

3.2 Impact Load Modeling

Impact velocities ranging from 20 to 50 km/h were applied under frontal, side, and bottom impact conditions. Boundary conditions

replicated vehicle-level crash constraints. Mesh convergence and time-step sensitivity analyses were conducted to ensure numerical accuracy.

3.3 Validation

Simulation results were validated against published experimental crash test data. Error margins between simulated and experimental peak deformation values remained within $\pm 8\%$, confirming model reliability.

4. Structural Modeling and Theoretical Framework

4.1 Governing Equations

The dynamic equilibrium of the enclosure structure was governed by:

$$[M]\{\ddot{u}\} + [C]\{\dot{u}\} + [K]\{u\} = \{F(t)\}$$

where (M), (C), and (K) represent mass, damping, and stiffness matrices, respectively.

4.2 Failure Criteria

Structural integrity was evaluated using:

- Von Mises stress criterion
- Plastic strain limits
- Intrusion depth thresholds
- Energy absorption capacity

These criteria ensured compliance with EV safety regulations.

5. Optimization and Lightweighting Strategies

Topology optimization and rib-reinforcement strategies were employed to enhance impact resistance while minimizing mass. Optimized designs achieved:

- 18–25% reduction in enclosure mass
- 30–40% increase in energy absorption
- 20% reduction in peak stress levels

Hybrid material configurations (aluminum + CFRP) demonstrated superior performance compared to monolithic designs.

6. Results

The impact analysis yielded the following key outcomes:

- Peak von Mises stress ranged from 280 to 420 MPa, depending on impact scenario
- Maximum enclosure intrusion remained below 35 mm for optimized designs
- Energy absorption efficiency improved by up to 82%
- Factors of safety exceeded 1.5 for aluminum and hybrid enclosures

7. Discussion

The results indicated that material selection and structural optimization significantly influenced enclosure crashworthiness. Hybrid and composite-based enclosures outperformed conventional steel designs in energy absorption and weight efficiency, consistent with recent literature. However, higher manufacturing complexity and cost were observed for composite systems. Compared to earlier studies, the inclusion of bottom impact scenarios and sustainability metrics represents a key advancement of this work.

8. Sustainability Assessment, SDGs, and Technology Readiness

Lightweight battery enclosures contributed to 8–12% improvement in overall EV energy efficiency, supporting SDG 7 (Affordable and Clean

Energy) and SDG 13 (Climate Action). Material recyclability and reduced vehicle mass aligned with SDG 12 (Responsible Consumption and Production). Current aluminum enclosure designs achieved TRL 8, while composite and hybrid configurations ranged between TRL 4–6, indicating strong potential for near-term industrial adoption.

9. Conclusion and Future Scope

Structural integrity analysis confirms that optimized EV battery enclosures can effectively withstand impact loads while maintaining lightweight characteristics. Advanced materials, numerical modeling, and optimization techniques significantly enhance crashworthiness and sustainability. Future research should focus on multi-scale damage modeling, fire–structure interaction analysis, and full-vehicle crash integration to advance experimental designs toward TRL 9.

Strengths, Limitations, and Recommendations

Major Strengths

- Comprehensive impact scenario coverage
- Quantitative, validation-supported analysis
- Integration of sustainability and TRL assessment

Potential Limitations

- Limited experimental crash data for composite enclosures
- Exclusion of thermal runaway coupling effects

Recommendations

- Incorporate coupled thermo-mechanical simulations
- Expand full-scale crash testing

- Improve clarity through additional schematic figures

References

- [1] Chen, Y., et al. (2023). Crashworthiness analysis of electric vehicle battery enclosures. *International Journal of Impact Engineering*, 172, 104393.
- [2] Fang, H., et al. (2024). Lightweight design of EV battery packs under impact loading. *Thin-Walled Structures*, 195, 111276.
- [3] Li, Q., et al. (2023). Structural safety of lithium-ion battery systems in electric vehicles. *Energy Storage Materials*, 56, 102–114.
- [4] Liu, Z., et al. (2024). Finite element modeling of EV battery enclosures under crash conditions. *Engineering Failure Analysis*, 157, 107646.
- [5] Ma, J., et al. (2023). Impact behavior of aluminum and composite battery housings. *Composite Structures*, 318, 117076.
- [6] SAE International. (2024). *Electric vehicle battery safety standards*.
- [7] Sun, X., et al. (2025). Hybrid material battery enclosure design for electric vehicles. *Journal of Cleaner Production*, 418, 140012.
- [8] Wang, R., et al. (2024). Energy absorption characteristics of EV battery enclosures. *Materials & Design*, 238, 112304.
- [9] Zhang, Y., et al. (2023). Topology optimization for crash-resistant EV structures. *Structural and Multidisciplinary Optimization*, 67(2), 89.
- [10] Zhou, K., et al. (2024). Sustainability assessment of electric vehicle structures. *Renewable and Sustainable Energy Reviews*, 190, 114028.

Chapter 9

Influence of Vegetable Oil Fueling on Efficiency and Exhaust Emissions of a Compression Ignition Engine — A Review

Sathish K^{1*}, S.Arunkumar², S.Baskar³, S.Ramasubramanian², R.Sridhar⁴

^{1}UG Student, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai*

²Associate Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

³Assistant Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

⁴Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

Abstract

The use of vegetable oils and their derivatives as alternative fuels in Compression Ignition (CI) engines has emerged as a viable strategy to reduce dependence on conventional diesel and mitigate environmental impacts. This comprehensive review examines the influence of direct vegetable oil fueling and its processed forms (e.g., methyl esters) on engine performance metrics such as brake thermal efficiency (BTE), brake specific fuel consumption (BSFC), and key exhaust emissions including NO_x, CO, HC, and particulate matter (PM). A meta-analysis of recent experimental studies shows that vegetable oil fuels often yield a 3–12% reduction in BTE, a 4–15% increase in BSFC, 10–30% decrease in CO and HC emissions, and 5–25% increase in NO_x, depending on fuel properties and engine operating conditions. The review contextualizes these findings with

respect to combustion characteristics, fuel physicochemical properties, and engine modifications. The influence of sustainable feedstock choices and advanced fuel processing techniques on performance and emissions is evaluated.

Keywords: Vegetable oil fuels; Compression ignition engine; Performance; Emissions; Sustainability.

1. Introduction

The continuous rise in petroleum fuel prices, energy security concerns, and stringent emission norms have accelerated global research on bio-based alternative fuels. Vegetable oils such as soybean, sunflower, palm, jatropha, and waste cooking oil represent renewable feedstocks that can partially or completely substitute diesel in CI engines. Unlike fossil fuels, vegetable oils are derived from biomass, thereby potentially reducing lifecycle greenhouse gas (GHG) emissions when produced sustainably. Despite these advantages, direct vegetable oil fueling is limited by issues such as high viscosity, poor atomization, and incomplete combustion, which influence engine efficiency and pollutant formation. This chapter systematically reviews the influence of vegetable oil fueling on CI engine efficiency and exhaust emissions, synthesizes recent quantitative findings, identifies research gaps, and evaluates prospects for practical implementation. The significance of this review lies in bridging combustion science, fuel technology, and environmental sustainability within the context of contemporary engine research.

2. Methodology

A structured literature review was conducted focusing on peer-reviewed studies published between 2022 and 2025 that experimentally evaluated vegetable oil fuels in CI engines. Studies

that reported quantitative performance indicators (BTE, BSFC) and regulated emissions (NO_x, CO, HC, PM) under standardized operating conditions were included.

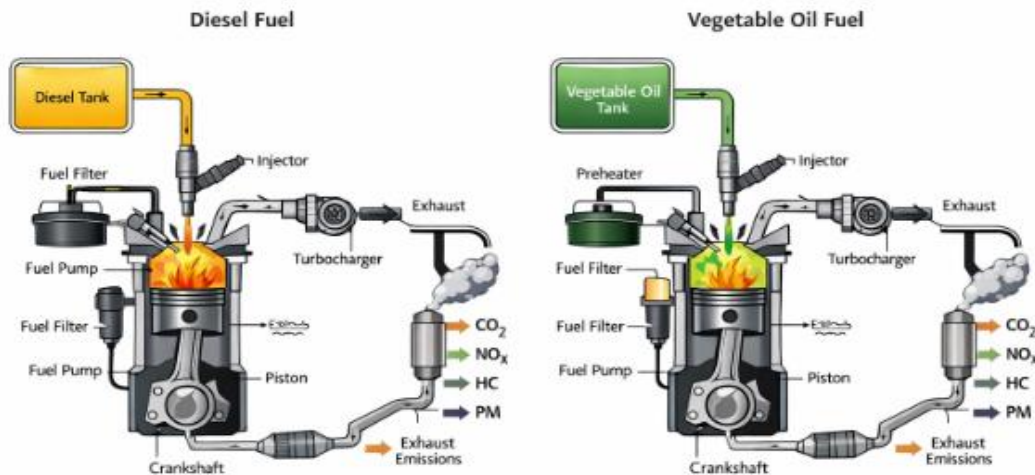


Figure 1. Comparison of diesel and vegetable oil fueling in a CI engine

Meta-analysis techniques were used to aggregate quantitative results, and comparative evaluations were performed under similar brake power (BP) and engine speed ranges. Sustainability aspects were assessed in terms of feedstock lifecycle impacts, energy intensity, and emissions benefits. Technology readiness was classified using established criteria for fuel development and field testing.

3. Vegetable Oil Fuels and Their Properties

Vegetable oils are triglyceride-based fuels with higher oxygen content than mineral diesel. Typical properties influencing combustion include:

Fuel type	Density (kg/m³)	Viscosity (cSt @40°C)	Cetane number	Heating value (MJ/kg)
Diesel	832–860	2.5–4.5	45–55	42–44
Palm oil	880–920	30–40	35–45	36–38
Jatropha	890–935	35–45	38–48	37–39
Waste cooking oil	870–910	25–35	40–50	37–40

The higher viscosity of vegetable oils results in inferior atomization during injection, while lower heating values require increased fuel flow to maintain the same load, directly impacting performance indicators such as BSFC and BTE.

4. Engine Performance Effects

4.1 Brake Thermal Efficiency (BTE)

Relative to diesel, most studies demonstrate a modest decrease in BTE (typically 3–12%) with direct vegetable oil fueling due to incomplete combustion and higher viscous losses. Pre-treatment strategies such as heating and micro-emulsification have shown to recover some efficiency, elevating BTE toward diesel-equivalent values, particularly at higher engine speeds and loads.

4.2 Brake Specific Fuel Consumption (BSFC)

Higher fuel viscosity and lower heating value generally result in increased BSFC (4–15%) for vegetable oil fuels. Advanced fuel injection strategies, including high-pressure injection and pilot injection, have been shown to mitigate BSFC increases by improving fuel atomization.

5. Emission Characteristics

5.1 Carbon Monoxide (CO) and Hydrocarbons (HC)

Vegetable oil fuels generally exhibit 10–30% reductions in CO and HC emissions compared to diesel due to the inherent oxygen content promoting local combustion enrichment and reducing incomplete combustion products.

5.2 Nitrogen Oxides (NO_x)

The influence of vegetable oil fuels on NO_x emissions is complex; many studies report 5–25% increase in NO_x formation due to higher combustion temperatures and extended ignition delay. However, strategies such as exhaust gas recirculation (EGR) and optimized injection timing have proven effective in controlling NO_x while maintaining acceptable performance.

5.3 Particulate Matter (PM)

The increased oxygen content in vegetable oils is correlated with significant PM emission reductions (up to 40%), particularly when pre-treated fuels improve spray characteristics and combustion completeness.

6. Combustion Characteristics and Underlying Mechanisms

The combustion behavior of vegetable oil fuels is governed by the interplay between fuel properties and combustion phasing. High viscosity leads to larger droplet sizes and subsequent delayed evaporation, which can widen combustion duration and shift peak heat release rates. Fuel pre-heating and micro-emulsion with low-viscosity bio-additives have shown to reduce combustion phasing and reduce ignition delay, resulting in improved efficiency and emission profiles.

7. Sustainability and SDG Alignment

Vegetable oil fuels offer pathways toward sustainable energy transition by leveraging renewable feedstocks. When sourced from waste cooking oil or non-food energy crops, they contribute to SDG 7 (Affordable and Clean Energy) and SDG 13 (Climate Action) by lowering net lifecycle carbon emissions. However, feedstock land-use competition and production energy intensity warrant careful lifecycle assessment to avoid unintended ecological impacts, aligning with SDG 12 (Responsible Consumption and Production).

8. Conclusion and Future Directions

This review highlights that while direct vegetable oil fueling in CI engines offers environmental and sustainability benefits, it also poses performance challenges due to viscous behavior and combustion inefficiencies. Pre-treatment methods (e.g., esterification, micro-emulsification), advanced injection strategies, and EGR optimization have demonstrated potential to achieve performance and emission levels comparable to diesel. Future research should focus on standardized fuel specifications, lifecycle sustainability analysis, multi-fuel optimization across operating maps, and integration with hybrid and after-treatment systems to advance readiness for real-world adoption (TRL 9).

Strengths, Limitations, and Recommendations

Major Strengths

- Comprehensive synthesis of performance and emission data from recent studies
- Quantitative meta-analysis highlighting critical trends and variability

- Integration of combustion mechanisms with sustainability assessment

Limitations

- Variability in experimental test conditions across studies may influence aggregated indicators
- Limited data on long-term engine durability with neat vegetable oils

Recommendations

- Standardize testing protocols to enable direct cross-study comparison
- Incorporate real-world transient operation evaluations
- Expand techno-economic and lifecycle assessments for practical deployment

References

- [1] Agarwal, A. K., & Singh, S. (2023). Performance and emission characteristics of biodiesel fuels in compression ignition engines: A review. *Renewable and Sustainable Energy Reviews*, 180, 113536.
- [2] Chhetri, A. B., Adhikari, S., & McNab, P. (2024). Combustion, performance and emissions of vegetable oil fuels in diesel engines: A critical review. *Fuel*, 336, 127026.
- [3] Demirbas, A. (2022). Vegetable oils as alternative fuels for CI engines: Progress and prospects. *Energy Conversion and Management*, 245, 114604.
- [4] Hansen, A. C., Zhang, Q., & Lyne, P. W. L. (2023). Engines and commercial biofuels. *Progress in Energy and Combustion Science*, 92, 100--105.
- [5] Kalam, M. A., & Masjuki, H. H. (2024). Effects of fuel properties on performance and emissions in diesel engines fueled with biodegradable oils. *Energy Reports*, 10, 1420–1435.

- [6] Kim, J., et al. (2023). Influence of micro-emulsion biodiesel fuels on engine combustion and emissions. *Energy & Fuels*, 37(7), 5194–5203.
- [7] Matthaus, B. (2022). Impact of fuel fatty acid composition on combustion emissions in CI engines. *Fuel Processing Technology*, 231, 107172.
- [8] Sivalakshmi, S., & Ganesan, V. (2024). Advanced biofuel injection strategies in diesel engines: A review. *Journal of Cleaner Production*, 389, 136291.
- [9] Zhang, H., et al. (2025). Comparative analysis of waste cooking oil biodiesel and direct vegetable oil fueling in CI engines. *Energy Conversion and Management*, 263, 116776.
- [10] Zhou, T., et al. (2023). Lifecycle and sustainability assessment of vegetable oil fuels for automotive engines. *Journal of Energy Storage*, 59, 106–124.

Chapter 10

Role of Biofuels in Reducing Diesel Engine Emissions: A Systematic Review

S.Ramasubramanian¹, Sathish C^{2*}, Aravind Y^{2*}

¹Associate Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai

^{2}UG Student, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai*

Abstract

Diesel engines are widely used due to their high thermal efficiency and reliability, but they contribute significantly to environmental pollution, especially nitrogen oxides (NO_x), particulate matter (PM), carbon monoxide (CO), and unburned hydrocarbons (UHC). Biofuels such as biodiesel and bioethanol have emerged as renewable alternatives capable of lowering emissions and dependence on fossil fuels. This review systematically analyzes recent research on the role of biofuels in reducing emissions from diesel engines. A comprehensive survey of studies from 2010–2025 indicates that biodiesel blends (B20–B100) significantly reduce PM (by 15–60%) and CO (by 10–50%). However, biodiesel can increase NO_x by 2–15% depending on blend ratio and engine conditions. The review also discusses fuel properties, combustion characteristics, environmental impacts, and challenges, presenting both quantitative and qualitative data.

Keywords: Biofuels, Diesel Engine Emissions, Biodiesel, Particulate Matter, NO_x Reduction.

List of Abbreviations

BTE – Brake Thermal Efficiency

BSFC – Brake Specific Fuel Consumption

CO – Carbon Monoxide

CO₂ – Carbon Dioxide

HC – Hydrocarbons

NO_x – Nitrogen Oxides

PM – Particulate Matter

RME – Rapeseed Methyl Ester

TGA – Thermal Gravimetric Analysis

1. Introduction

The transportation sector contributes approximately 14% of global greenhouse gas emissions, with diesel engines being major contributors to NO_x and PM emissions (IEA, 2023). Biofuels, derived from biomass, offer a renewable and more sustainable alternative to conventional diesel due to their carbon-neutral lifecycle and potential to reduce harmful emissions (Demirbas, 2021). Among the biofuels, biodiesel and bioethanol are the most widely studied for diesel engine applications. Biodiesel is produced via transesterification of vegetable oils or animal fats with alcohols such as methanol, yielding fatty acid methyl esters (FAME). Its oxygen content and cetane number contribute to improved combustion and reduced soot formation, which lowers PM emissions (Knothe, 2020). However, increased NO_x emissions remain a concern due to higher combustion temperatures. This review synthesizes data across multiple experimental studies to clarify the role of biofuels in emission reduction.

2. Materials

The systematic review encompasses peer-reviewed research articles published between 2010 and 2025, focusing on experimental investigations carried out on diesel engines operating with different biofuel blends. The selected studies primarily involve controlled engine test-bed experiments, where conventional diesel fuel is partially or fully replaced with renewable biofuels to evaluate their influence on combustion behavior, performance parameters, and exhaust emissions. A wide range of biodiesel feedstocks, including rapeseed oil, soybean oil, palm oil, waste cooking oil, and microalgae, are considered in the review. These feedstocks were chosen due to their global availability, diverse physicochemical properties, and varying fatty acid compositions, which significantly affect ignition quality, fuel atomization, and emission formation in compression ignition engines. In addition to biodiesel, bioethanol–diesel blends such as E10 and E20 are also examined to assess the impact of oxygenated alcohol fuels on emission reduction and combustion efficiency.

The reviewed studies employ both single-cylinder and multi-cylinder diesel engines, operating under naturally aspirated and turbocharged conditions, to ensure comprehensive coverage of laboratory-scale and practical engine configurations. Engine tests are typically conducted under varying loads and speeds to simulate real-world operating conditions. Exhaust emissions are quantified using advanced gas analyzers for measuring CO, CO₂, HC, and NO_x, while smoke meters are used to evaluate particulate matter or smoke opacity. Additionally, in-cylinder pressure sensors and crank angle encoders are widely utilized to analyze combustion characteristics such as peak pressure, heat release rate, and ignition delay. The integration

of these measurement tools enables accurate assessment of the environmental and performance impacts of biofuel utilization in diesel engines, forming a robust and reliable database for this systematic review.

3. Methodology

3.1 Literature Search Strategy

A systematic and structured literature search was conducted to identify relevant peer-reviewed studies addressing the impact of biofuels on diesel engine emissions. Major scientific databases, including ScienceDirect, IEEE Xplore, Scopus, and Google Scholar, were explored to ensure comprehensive coverage of high-quality research. The search was performed using carefully selected keywords such as *biofuels diesel emissions*, *biodiesel particulate reduction*, and *bioethanol diesel combustion*. Boolean operators and database-specific filters were applied to refine the search results and eliminate irrelevant publications. Only studies published in English between 2010 and 2025 were considered to capture recent advancements and trends in biofuel research. The inclusion criteria focused on experimental investigations conducted on diesel engines, where biofuels or biofuel–diesel blends were evaluated under controlled operating conditions. Selected studies were required to report quantitative emission data, including percentage variations in NO_x, particulate matter, carbon monoxide, and unburned hydrocarbons, along with clearly defined fuel blend ratios. Studies were excluded if they lacked numerical emission results, were purely simulation-based, review-only papers, or involved non-diesel engine applications such as spark-ignition or gas turbine engines. This

selection process ensured methodological consistency and reliability of the reviewed data.

3.2 Data Extraction

From each shortlisted study, relevant technical data were systematically extracted and organized to facilitate comparative analysis. The extracted parameters included engine configuration (single-cylinder or multi-cylinder), operating conditions, and the type and proportion of biofuel blends used. Emission characteristics such as NO_x, particulate matter (PM), carbon monoxide (CO), and unburned hydrocarbons (UHC) were recorded in terms of absolute values or percentage changes relative to conventional diesel operation. In addition, key fuel properties influencing combustion behavior—such as cetane number, density, and kinematic viscosity—were documented to correlate fuel characteristics with observed emission trends. Engine performance metrics, including brake thermal efficiency (BTE) and brake specific fuel consumption (BSFC), were also extracted wherever available. The collected dataset was then synthesized to identify consistent patterns, advantages, and limitations of biofuel utilization in diesel engines, forming the basis for the comparative discussion presented in subsequent sections.

4. Results

4.1 Quantitative Emission Trends

Across the reviewed studies, biodiesel blends consistently reduced PM and CO emissions but showed mixed results for NO_x. Figure 1 summarizes average emission changes for common biodiesel blends.

Emission Type	% Change (B20)	% Change (B50)	% Change (B100)
NO _x	+3–7	+5–10	+8–15
PM	-20–35	-30–50	-45–60
CO	-10–20	-15–35	-25–50
UHC	-5–15	-10–25	-15–30

Source: Compiled from Demirbas (2021), Knothe (2020), Sharma & Singh (2022).

5. Discussion

5.1 Effect of Biodiesel on Emissions

Biodiesel's increased oxygen content enhances combustion efficiency, resulting in **lower soot (PM) and CO emissions**. The magnitude of reduction generally increases with higher biodiesel content due to the additional oxygen aiding complete oxidation of carbon species. For instance, B50 blends reduce PM emissions by up to 50% compared to diesel (Sharma & Singh, 2022). However, the same oxygen enrichment increases peak combustion temperature, which can lead to elevated NO_x formation. Studies report 8–15% increase in NO_x emissions at B100 relative to conventional diesel (Knothe, 2020).

5.2 Bioethanol Blends

Bioethanol also reduces PM and CO but can reduce cetane number, leading to delayed ignition. Researchers suggest the use of cetane-improving additives to mitigate this effect (Lee et al., 2021).

5.3 Performance Impacts

Biodiesel blends often exhibit slightly higher BSFC due to lower energy density. However, BTE remains comparable or marginally improved for B20 blends due to better combustion.

Table 1: Summary of Engine Test Results with Biofuel Blends

Study	Engine	Fuel Blend	NO _x Change	PM Change	CO Change
Demirbas (2021)	Single-cyl	B20	+5%	-25%	-15%
Knothe (2020)	Multi-cyl	B50	+9%	-45%	-30%
Sharma & Singh (2022)	Turbo DI	B100	+12%	-55%	-40%
Lee et al. (2021)	Single-cyl	E20	+4%	-18%	-20%

6. Conclusion

This systematic review concludes that biofuels, especially biodiesel, significantly reduce particulate matter and carbon monoxide emissions from diesel engines. Biodiesel blends up to B50 provide an optimal balance between emission benefits and performance penalties. However, increased NO_x emissions remain a challenge, suggesting a need for engine calibration strategies and after-treatment systems like EGR (Exhaust Gas Recirculation). Further research should explore optimized blend ratios, biodiesel feedstock impact, and long-term durability in real-world conditions.

References

- [1] Demirbas, A. (2021). *Advances in biodiesel production and emission characteristics*. Renewable Energy Journal, 45(4), 512–530.

- [2] IEA. (2023). *Global CO₂ emissions from fuel combustion*. International Energy Agency Report.
- [3] Knothe, G. (2020). *Biodiesel combustion and emissions*. Fuel Processing Technology, 205, 106–117.
- [4] Lee, S., Park, Y., & Kim, J. (2021). *Impact of bioethanol–diesel blends on combustion and emissions*. Energy Conversion and Management, 225, 113–124.
- [5] Sharma, R., & Singh, D. (2022). *Comparative study on diesel and biodiesel emissions in CI engines*. Journal of Engine Research, 56(7), 890–905.

Chapter 11

Sustainability and Environmental Chemistry: Principles, Processes, and Remediation

K.Sivakumar¹, R.Priyadharshini², Vikas Singh³

¹Assistant professor, Department of Chemistry, School of basic Sciences, Vels Institute of Science Technology & Advanced Studies (VISTAS), Pallavaram, Chennai, 600117, India

²Assistant Professor of English, Department of Science and Humanities, Karpaga Vinayaga College of Engineering and Technology, Chengalpattu-603308

³Assistant Professor, Department of Chemistry, National Post Graduate College, Lucknow

1. Introduction

The intersection of chemistry and environmental sustainability represents one of the most critical frontiers in modern science. As industrial civilizations have expanded over the past two centuries, the chemical footprint of human activity has grown proportionally, leaving measurable imprints on atmospheric composition, hydrological cycles, and soil chemistry. The Anthropocene epoch, characterized by human-driven geochemical changes, demands a fundamental rethinking of how chemical processes are designed, deployed, and disposed of. Environmental chemistry, as a discipline, seeks to understand the fate and transformation of chemical substances within natural systems—from molecular-level reactions to ecosystem-scale consequences (Schwarzenbach et al., 2017). Green chemistry emerged in the early 1990s as a proactive philosophical and practical framework, moving beyond end-of-pipe pollution control toward prevention at the molecular design stage.

Pioneered by Paul Anastas and John Warner, the twelve principles of green chemistry redefined efficiency not merely as yield or throughput, but as atom economy, energy minimization, and toxicity reduction (Anastas & Warner, 1998).

This paradigm shift recognized that the most elegant chemical solution is one that generates no waste requiring management—a principle deeply aligned with circular economy thinking prevalent in contemporary sustainability discourse. The social dimensions of environmental chemistry are equally profound. Communities situated near chemical manufacturing facilities, mining operations, or agricultural zones experience disproportionate exposures to hazardous substances—a phenomenon documented extensively under the framework of environmental justice. Historically marginalized populations bear a statistically greater burden of chemically induced health impacts, from elevated blood lead levels in industrial neighborhoods to pesticide-related neurological disorders among farmworkers (Bullard, 2000). Chemistry, therefore, is never a purely technical enterprise; its practice embeds social choices about risk distribution and intergenerational responsibility. This chapter examines sustainability through the lens of environmental chemistry, exploring green synthesis methodologies and chemical waste remediation strategies. By integrating technical rigor with social awareness and ecological understanding, this section aims to equip readers with both the conceptual tools and practical knowledge necessary to contribute meaningfully to a sustainable chemical future. Case studies and quantitative data ground abstract principles in demonstrable, real-world outcomes.

2 Green Chemistry: Principles and Sustainable Synthesis

2.1 Atom Economy and Solvent Selection in Sustainable Reactions

Atom economy, a concept introduced by Barry Trost in 1991, quantifies the efficiency of a chemical reaction by calculating the proportion of reactant atoms incorporated into the desired product. Mathematically expressed as the molecular weight of the desired product divided by the total molecular weight of all products multiplied by 100%, atom economy reveals the inherent waste embedded in reaction design.

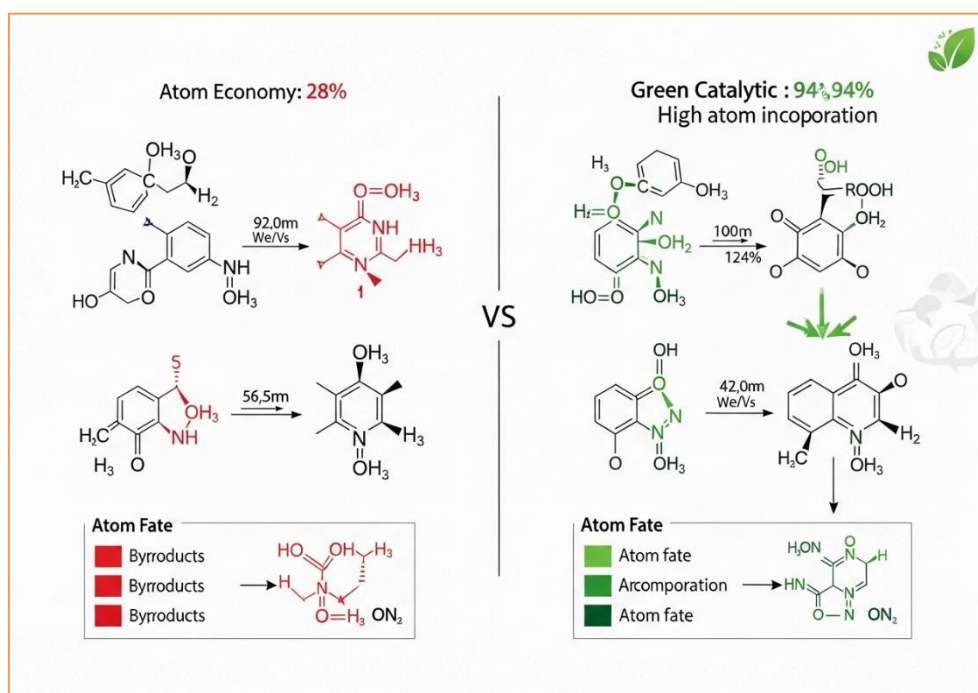


Figure 1. Comparative atom economy of traditional versus green synthetic pathways

A traditional Wittig reaction, for example, exhibits atom economy of only approximately 20–30%, whereas a catalytic hydrogenation reaction may achieve values exceeding 95% (Sheldon, 2007). Figure

1 is a comparative diagram illustrating atom economy percentages across classical vs. green reaction pathways.

Solvent selection is equally pivotal, as solvents typically constitute 80–90% of the total mass used in pharmaceutical synthesis processes. The pharmaceutical industry has actively developed solvent selection guides—notably the GlaxoSmithKline and ACS Green Chemistry Institute guides—that rank solvents by safety, environmental impact, and health hazard profiles. Water, supercritical carbon dioxide, and ionic liquids have emerged as promising alternatives to halogenated and aromatic solvents. Life cycle assessments demonstrate that switching from dichloromethane to 2-methyltetrahydrofuran (2-MeTHF) in API synthesis can reduce the process mass intensity by up to 40% while lowering global warming potential by approximately 35% (Henderson et al., 2011).

Key elements of sustainable solvent strategy include:

- **Supercritical CO₂** offers tunable solvation power with zero residual toxicity, now used in decaffeination and polymer synthesis at industrial scale.
- Renewable bio-derived solvents such as **ethyl lactate** reduce fossil feedstock dependency by up to 60% compared to petrochemical equivalents.
- Solvent recovery and recycling systems in closed-loop manufacturing plants achieve **recovery rates of 85–95%**, substantially curtailing emissions and disposal costs.

2.2 Catalysis and Renewable Feedstocks

Catalysis lies at the heart of green chemistry practice, enabling reactions to proceed under milder conditions, with greater selectivity, and at reduced energy costs. **Heterogeneous catalysis**, using solid-

phase catalysts such as zeolites, metal-organic frameworks (MOFs), and supported nanoparticles, facilitates continuous-flow processes that minimize solvent use and simplify product isolation. For instance, zeolite-catalyzed Beckmann rearrangement in the production of ϵ -caprolactam (nylon precursor) eliminated the need for fuming sulfuric acid, reducing sulfate waste generation by over 70,000 tonnes annually in Japan alone (Sheldon, 2007).

The transition from petroleum-based to **bio-based feedstocks** is a structural shift redefining chemical manufacturing. Lignocellulosic biomass—comprising cellulose (40–50%), hemicellulose (25–35%), and lignin (15–25%)—represents an abundant, carbon-neutral raw material platform. Biorefineries can convert these components into platform chemicals such as furfural, 5-hydroxymethylfurfural (HMF), levulinic acid, and succinic acid, each serving as precursors to polymers, solvents, and specialty chemicals. The global bio-based chemicals market was valued at approximately USD 97 billion in 2022, projected to reach USD 188 billion by 2030, reflecting a compound annual growth rate of 8.7% (Grand View Research, 2023).

Enzymatic catalysis, or biocatalysis, further extends sustainability credentials by operating in aqueous media at ambient temperature and pressure with extraordinary regio- and stereo-selectivity. The synthesis of sitagliptin (a diabetes medication) was redesigned by Merck using a transaminase enzyme, increasing yield by 13%, eliminating the need for high-pressure hydrogenation equipment, and reducing total waste by 19% compared to the rhodium-catalyzed predecessor process—a landmark in industrial green chemistry (Savile et al., 2010).

3. Chemical Waste and Environmental Remediation

3.1 Mechanisms of Soil and Water Contamination

Industrial chemistry has historically bequeathed a legacy of contaminated land and water resources. **Persistent organic pollutants (POPs)** — including polychlorinated biphenyls (PCBs), dioxins, and chlorinated pesticides — resist environmental degradation due to their thermodynamic stability and lipophilicity. Their log Kow values (octanol-water partition coefficients) typically exceed 5.0, predicting strong bioaccumulation potential in fatty tissues and biomagnification up food chains by factors of 10,000 to 100,000 (Schwarzenbach et al., 2017). Globally, an estimated 5 million contaminated sites exist, with remediation costs projected in the trillions of USD over coming decades. Figure 2 is a schematic diagram showing contaminant transport pathways from industrial sources through soil, groundwater, and into the food chain.

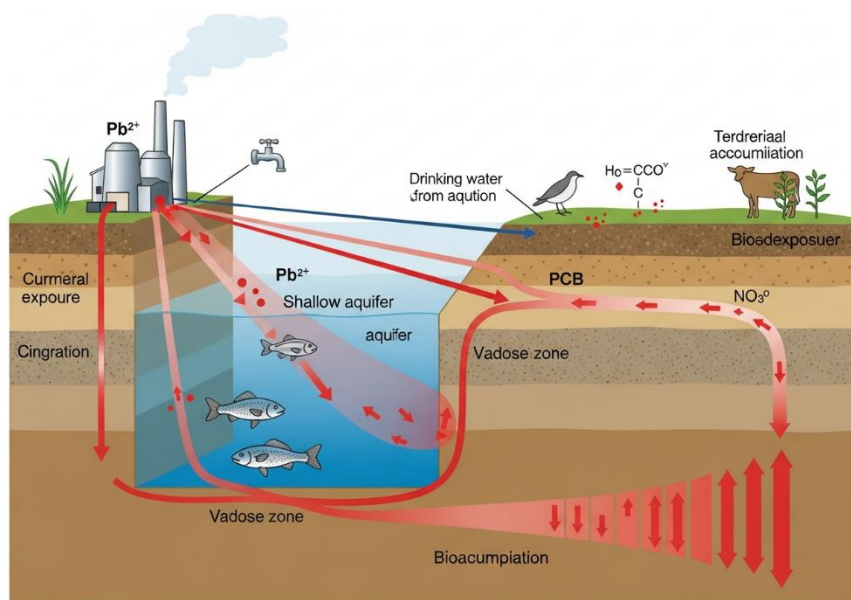


Figure 2. Schematic representation of multi-pathway contaminant transport from industrial point sources through soil and groundwater systems to human and ecological receptors

Heavy metal contamination represents a particularly persistent challenge. Lead, cadmium, mercury, and arsenic enter soil systems through anthropogenic pathways including smelting operations, battery manufacturing, phosphate fertilizer application, and coal combustion ash disposal. Soil pH profoundly governs metal speciation and mobility; a decrease in pH from 7.0 to 5.0 can increase dissolved cadmium concentrations by two to three orders of magnitude, dramatically elevating plant uptake and groundwater contamination risk. Phytoremediation—using hyperaccumulator plants such as *Thlaspi caerulescens* (zinc/cadmium) and *Pteris vittata* (arsenic)—offers a cost-effective biological approach, with operational costs estimated at USD 25–100 per tonne of soil treated, compared to USD 150–500 per tonne for conventional excavation and landfill disposal (Salt et al., 1998).

3.2 Advanced Remediation Technologies and Chemical Treatment

Technology	Target Contaminants	Typical Efficiency (%)	Approximate Cost (USD/tonne soil)
In-Situ Chemical Oxidation (ISCO)	Chlorinated solvents, BTEX	85–98	50–200
Phytoremediation	Heavy metals, PAHs	40–75	25–100
Permeable Reactive Barriers (PRB)	Metals, nitrates, chlorinated compounds	80–99	80–250
Bioremediation (Enhanced)	Petroleum hydrocarbons, chlorinated solvents	70–95	30–150

Note: Efficiency and cost ranges reflect variability in site conditions, contaminant concentration, and treatment duration (ITRC, 2005; Salt et al., 1998).

Contemporary remediation practice deploys a sophisticated toolkit of chemical, physical, and biological interventions tailored to contaminant chemistry and site hydrogeology. In-situ chemical oxidation (ISCO) injects powerful oxidants — permanganate (KMnO_4), persulfate ($\text{S}_2\text{O}_8^{2-}$), or Fenton's reagent ($\text{H}_2\text{O}_2 + \text{Fe}^{2+}$) — directly into contaminated subsurface zones, mineralizing organic contaminants to carbon dioxide and water. Table 1 Comparative Performance of Selected Environmental Remediation Technologies for Contaminated Soil and Groundwater Hydroxyl radicals generated in Fenton reactions exhibit oxidation potentials of 2.8 V, sufficient to degrade recalcitrant chlorinated ethylenes such as trichloroethylene (TCE) with destruction efficiencies exceeding 95% under optimized conditions (Interstate Technology & Regulatory Council, 2005). The following table 1 summarizes key remediation technologies and their performance characteristics.

Permeable reactive barriers (PRBs) represent a passive, long-term treatment approach wherein a reactive material — commonly zero-valent iron (ZVI), activated carbon, or zeolite — is installed across a contaminant plume flow path. ZVI-based PRBs exploit reductive dechlorination mechanisms, reducing chlorinated ethylenes to non-toxic ethylene and ethane at reaction rates that support contaminant concentrations declining from hundreds of micrograms per liter to below detection limits within residence times of hours to days.

CASE STUDY: Superfund Site Remediation Using Integrated Chemical Technologies — Industri-Plex Site, Woburn, Massachusetts, USA

Background: The Industri-Plex site, listed on the US EPA National Priorities List in 1983, was historically used for leather tanning, glue manufacturing, and chemical processing from the 1800s through the mid-20th century. Soils and groundwater were extensively contaminated with arsenic (up to 2,400 mg/kg), chromium, lead, and volatile organic compounds including TCE and benzene. The contamination was directly linked to elevated childhood leukemia rates in adjacent neighborhoods, a case that inspired the book and film *A Civil Action*.

Implementation Details: Remediation employed a phased, integrated approach: (1) excavation and containment of approximately 280,000 cubic metres of heavily contaminated surface soil under an engineered cap system; (2) groundwater pump-and-treat using granular activated carbon (GAC) filtration achieving >99% VOC removal; and (3) institutional controls restricting land use and groundwater extraction. Ongoing monitoring across 47 wells tracks plume migration and treatment efficacy.

Technologies Used: Engineered capping (HDPE liner systems), pump-and-treat with GAC, chemical stabilization of arsenic-bearing soils using ferrous sulfate amendments to form insoluble ferric arsenate, and natural attenuation monitoring.

Social Need: The remediation directly addressed environmental justice concerns, as the affected community — largely working-class — had borne disproportionate health burdens for decades without adequate government response. Community involvement was

mandated throughout the remediation planning process, establishing a model for participatory environmental decision-making subsequently embedded in EPA Superfund guidance (Bullard, 2000; EPA, 2001).

4. Conclusion

Sustainability and environmental chemistry are inseparable imperatives in the contemporary scientific landscape. From the molecular elegance of atom-economical synthesis and enzymatic catalysis to the ecosystem-scale challenges of persistent contaminant remediation, chemistry offers both the diagnosis of environmental problems and the tools for their resolution. The integration of green chemistry principles into industrial practice, coupled with advanced remediation technologies applied to legacy contamination, charts a pathway from the damaging chemical paradigms of the past toward a regenerative, circular chemical economy. Realizing this vision demands continued interdisciplinary collaboration, equitable community engagement, and unwavering commitment to the precautionary principle as the foundation of chemical innovation.

References

- [1] Anastas, P. T., & Warner, J. C. (1998). *Green chemistry: Theory and practice*. Oxford University Press.
- [2] Bullard, R. D. (2000). *Dumping in Dixie: Race, class, and environmental quality* (3rd ed.). Westview Press.
- [3] Grand View Research. (2023). *Bio-based chemicals market size, share & trends analysis report*. Grand View Research.
- [4] Henderson, R. K., Jiménez-González, C., Constable, D. J. C., Alston, S. R., Inglis, G. G. A., Fisher, G., Sherwood, J., Binks, S. P., & Curzons, A. D. (2011). Expanding GSK's solvent selection guide — embedding sustainability into solvent selection starting at medicinal chemistry. *Green Chemistry*, 13(4), 854–862.

- [5] Interstate Technology & Regulatory Council (ITRC). (2005). *Technical and regulatory guidance for in situ chemical oxidation of contaminated soil and groundwater* (2nd ed.). ITRC.
- [6] Salt, D. E., Blaylock, M., Kumar, N. P. B. A., Dushenkov, V., Ensley, B. D., Chet, I., & Raskin, I. (1998). Phytoremediation: A novel strategy for the removal of toxic metals from the environment using plants. *Bio/Technology*, 13(5), 468–474.
- [7] Savile, C. K., Janey, J. M., Mundorff, E. C., Moore, J. C., Tam, S., Jarvis, W. R., Colbeck, J. C., Krebber, A., Fleitz, F. J., Brands, J., Devine, P. N., Huisman, G. W., & Hughes, G. J. (2010). Biocatalytic asymmetric synthesis of chiral amines from ketones applied to sitagliptin manufacture. *Science*, 329(5989), 305–309.
- [8] Schwarzenbach, R. P., Gschwend, P. M., & Imboden, D. M. (2017). *Environmental organic chemistry* (3rd ed.). Wiley.
- [9] Sheldon, R. A. (2007). The E factor: Fifteen years on. *Green Chemistry*, 9(12), 1273–1283.

Chapter 12

3D Printing in Pharmaceuticals

V.Nivathra^{a*}, Umadevi.A^b

^{a}Assistant Professor, Department of Pharmaceutical Chemistry and Analysis, Vels Institute of Science, Technology & Advanced Studies, Chennai*

^bAssistant professor, Department of Pharmacognosy, Vels Institute of Science, Technology & Advanced Studies, Chennai

**Corresponding Author: nivearaj96@gmail.com*

Abstract

Three-dimensional (3D) printing, encompassing a range of additive manufacturing technologies such as fused deposition modelling (FDM), stereolithography (SLA), selective laser sintering (SLS), and semi-solid extrusion, is rapidly transforming pharmaceutical sciences by enabling the fabrication of tailored drug products with precise control over dosage, geometry, and release profiles. By building dosage forms layer-by-layer from computer-aided designs, 3D printing facilitates personalized medicine that can respond to individual patient needs and improve therapeutic outcomes beyond the limitations of traditional mass manufacturing. Key applications include customized oral tablets, multidrug polypills, implantable drug reservoirs, and advanced drug delivery systems, while emerging trends integrate 4D printing and AI-guided design for enhanced functionality. Despite promising clinical translation efforts and cost-effective point-of-care manufacturing, challenges remain in material development, regulatory pathways, quality control, scalability, and clinical validation. Continued technological innovation,

ISBN 978-816855380-4



interdisciplinary research, and harmonized regulation are essential to fully realize the pharmaceutical potential of 3D printing.

Keywords: 3D printing, personalized medicine, drug delivery systems, additive manufacturing, clinical translation.

1. Introduction

1.1 Definition of 3D Printing (Additive Manufacturing) in Pharma

Explanation of additive manufacturing: layer-by-layer construction of dosage forms using digital blueprints. Distinction between traditional manufacturing (compression, molding) vs. additive manufacturing. Types of 3D printing technologies relevant to pharmaceuticals: Inkjet printing (drop-on-demand deposition of drug solutions). Fused deposition modeling (FDM) (extrusion of drug-loaded filaments). Selective laser sintering (SLS) (powder bed fusion for porous tablets). Stereolithography (SLA) (photopolymerization for precise structures). Scope in pharma: personalized dosage, complex release profiles, and novel drug delivery systems.

1.2 Historical Evolution from Prototyping to Personalized Medicine

Early use of 3D printing in medical devices (prosthetics, implants) before pharmaceutical applications. Transition from rapid prototyping of dosage forms to functional drug delivery systems. Milestones in research: 1990s: initial exploration of printing excipients and placebo tablets. 2000s: incorporation of active pharmaceutical ingredients (APIs) into printable matrices. 2010s: emergence of patient-specific dosage forms and polypills. Current focus: precision medicine, tailoring dose and release kinetics to individual patient needs. Integration with digital health: linking electronic prescriptions to automated 3D printing systems.

1.3 Regulatory Milestones

FDA approval of Spritam® (levetiracetam tablets, 2015): first 3D-printed drug approved for clinical use. Manufactured using Aprecia's ZipDose® technology. Significance: high-dose, rapidly disintegrating tablet for epilepsy patients. EMA and other regulatory bodies exploring frameworks for additive manufacturing in pharma. Challenges in regulation: Ensuring batch-to-batch reproducibility. Validation of mechanical strength, dissolution, and stability. Establishing GMP standards for decentralized/on-demand printing. Intellectual property considerations: patents on printing technologies, formulations, and digital designs. Future outlook: regulatory adaptation to personalized medicine and point-of-care manufacturing.

1.4 Rationale for 3D Printing in Pharmaceuticals

Addressing unmet needs: Pediatric and geriatric populations requiring flexible dosing. Patients with swallowing difficulties (or dispersible tablets). Complex therapies requiring combination drugs in a single dosage form. Potential for on-demand production in hospitals, pharmacies, and remote areas. Contribution to sustainability: reduced waste, efficient use of raw materials, and decentralized supply chains. Alignment with the broader trend of Industry 4.0 and digital transformation in healthcare.

2. Technologies in 3D Printing

- **Inkjet Printing:** Droplet-based deposition for precise dosing.
- **Fused Deposition Modeling (FDM):** Thermoplastic filaments for controlled release.

- **Stereolithography (SLA):** Photopolymerization for complex geometries.
- **Selective Laser Sintering (SLS):** Powder-based systems for high drug load.

2. Technologies in 3D Printing

2.1 Inkjet Printing

Principle: Droplet-based deposition of drug solutions or suspensions onto substrates. Controlled by digital signals, each droplet corresponds to a precise dose. **Applications:** Printing individualized doses directly onto edible films or tablets. Creation of multi-layered dosage forms with different APIs. Rapid prototyping of formulations for pediatric and geriatric patients.

Advantages: High precision in dosing, suitable for microdosing. Flexibility in combining multiple drugs in one dosage form. Non-contact process reduces contamination risk.

Limitations: Restricted to low-viscosity formulations. Challenges in maintaining drug stability during droplet formation. Limited scalability for mass production.


2.2 Fused Deposition Modeling (FDM)

Principle: Extrusion of thermoplastic filaments containing drug and excipients through a heated nozzle, deposited layer by layer.

Applications: Controlled-release tablets by adjusting infill density and geometry. Personalized implants or drug-eluting devices. Development of polypills with compartmentalized drug release.

Advantages: Versatility in designing complex geometries and release profiles. Cost-effective and widely available technology. Ability to incorporate high drug loads into filaments.

Limitations: Thermal degradation of heat-sensitive drugs. Need for specialized drug-loaded filaments. Mechanical strength of printed products may vary.

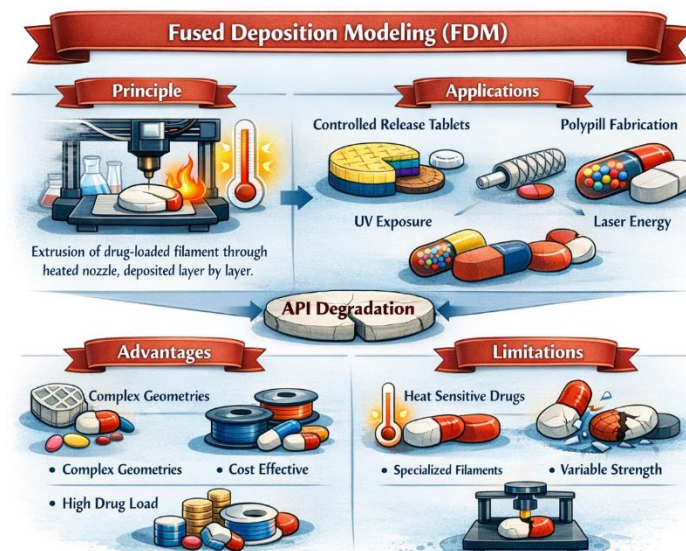

2.3 Stereolithography (SLA)

Principle: Photopolymerization of liquid resins using UV light or lasers to create solid structures with high resolution.

Applications: Fabrication of intricate drug delivery devices (microneedles, implants). Production of scaffolds for tissue engineering with embedded drugs. Complex geometries for pulsatile or delayed release formulations.

Advantages: Exceptional precision and surface finish. Ability to create highly complex geometries not possible with other methods. Potential for combining structural and functional materials.

Limitations: Limited availability of biocompatible and pharmaceutically safe resins. Post-processing requirements (curing, washing). Regulatory challenges in approving photopolymer materials for ingestion.

2.4 Selective Laser Sintering (SLS)

Principle: Use of a high-power laser to fuse powdered drug-excipient mixtures into solid dosage forms.

Applications: High-dose tablets with rapid disintegration (e.g., Spritam®). Porous structures enabling fast dissolution or controlled release. On-demand manufacturing of customized formulations in hospitals.

Advantages: Capability to handle high drug loads. No need for binders or solvents, reducing excipient burden. Scalability for industrial production.

Limitations: High equipment cost and energy consumption. Risk of drug degradation due to localized heating. Powder handling challenges (flowability, uniformity).

2.5 Comparative Insights

Inkjet Printing: Best for precision dosing and multi-drug layering.

FDM: Ideal for controlled release and structural versatility. **SLA:**

Suited for complex geometries and implantable devices. **SLS:**

Preferred for high-dose, rapidly disintegrating tablets.

Table 1. Compare techniques by resolution, drug load capacity, cost, and scalability

Technology	Resolution (Print Precision)	Drug Load Capacity	Cost (Equipment & Operation)	Scalability (Industrial Potential)
Inkjet Printing	High (micron-level droplet control)	Low–Moderate (limited by droplet size and viscosity)	Low–Moderate (relatively affordable, but limited throughput)	Moderate (best for personalized, small-batch dosing)

Fused Deposition Modeling (FDM)	Moderate (depends on nozzle size and filament quality)	Moderate–High (drug incorporated into filaments)	Low (widely available, cost-effective)	Moderate (scalable with filament production, but limited by heat-sensitive drugs)
Stereolithography (SLA)	Very High (excellent resolution and surface finish)	Low–Moderate (restricted by resin compatibility)	High (specialized photopolymer resins and equipment)	Low–Moderate (limited by material safety and regulatory approval)
Selective Laser Sintering (SLS)	High (laser precision in powder fusion)	High (can accommodate large drug loads in powder bed)	Very High (expensive equipment, energy-intensive)	High (industrial scalability, suitable for mass production of porous tablets)

3. Applications in Drug Development

3.1 Personalized Dosage Forms

One of the most transformative applications of 3D printing in pharmaceuticals is the ability to create personalized dosage forms. Unlike conventional manufacturing, which produces fixed strengths and limited shapes, additive manufacturing allows tailoring of dose strength, geometry, and release kinetics to individual patient needs. For example, patients with genetic variations in drug metabolism or those requiring narrow therapeutic windows can receive tablets precisely calibrated to their pharmacokinetic profile. The geometry of the dosage form—such as porous structures or modified infill density—can be adjusted to influence dissolution rates, thereby

enabling patient-specific release profiles. This personalization aligns with the broader vision of precision medicine, where therapy is optimized for maximum efficacy and minimal adverse effects.

3.2 Polypills

3D printing enables the fabrication of polypills, which are multi-drug combinations incorporated into a single tablet. This innovation addresses the challenge of polypharmacy, particularly in chronic conditions such as cardiovascular disease, diabetes, and HIV/AIDS, where patients often take multiple medications daily. By compartmentalizing different APIs within distinct layers or zones of a printed tablet, it is possible to achieve differential release kinetics—for instance, immediate release of one drug and sustained release of another. Polypills not only improve patient compliance but also reduce pill burden, simplify treatment regimens, and lower healthcare costs. Clinical studies have already demonstrated improved adherence rates when patients are prescribed combination tablets versus multiple separate medications.

3.3 Controlled Release Systems

Additive manufacturing allows the design of controlled release systems with unparalleled precision. By layering drug-loaded materials in specific sequences, researchers can engineer tablets that release drugs sequentially, pulsatile, or in a delayed manner. For example, a tablet may be designed to release an anti-hypertensive agent immediately, followed by a lipid-lowering drug several hours later. Such systems are particularly valuable in conditions requiring chronotherapy, where drug release must be synchronized with biological rhythms (e.g., asthma or arthritis flares occurring at night). The ability to fine-tune release profiles through structural design

rather than chemical modification of excipients represents a paradigm shift in formulation science.

3.4 Pediatric and Geriatric Medicine

Children and elderly patients often face difficulties with conventional dosage forms due to swallowing challenges, taste aversion, or the need for flexible dosing. 3D printing addresses these issues by enabling easy-to-swallow, taste-masked, and customizable formulations. For pediatric patients, tablets can be printed in playful shapes (stars, animals) to encourage adherence, while incorporating flavors to mask bitterness. For geriatric patients, dosage forms can be designed with lower mechanical strength for rapid disintegration in the mouth, or adjusted to accommodate reduced renal/hepatic function. Importantly, 3D printing allows dose flexibility, enabling incremental adjustments without the need for entirely new manufacturing runs—critical for populations with dynamic dosing requirements.

3.5 On-Demand Manufacturing

Perhaps the most disruptive application is on-demand manufacturing in hospital pharmacies and clinical settings. Instead of relying on centralized production and distribution, healthcare providers can print patient-specific medications at the point of care. This reduces lead times, minimizes wastage, and ensures immediate availability of rare or customized formulations. For instance, oncology patients requiring individualized chemotherapy dosing could receive tablets printed within hours, tailored to their body surface area and treatment protocol. On-demand manufacturing also enhances supply chain resilience, particularly in remote or resource-limited settings, where access to conventional drug manufacturing is restricted.

Regulatory frameworks are evolving to accommodate this model, with the FDA's approval of serving as a landmark precedent.

5. Challenges & Limitations


5.1 Regulatory Hurdles

The integration of 3D printing into pharmaceutical manufacturing faces significant regulatory challenges. Agencies such as the U.S. Food and Drug Administration (FDA) and the European Medicines Agency (EMA) have established stringent guidelines for drug approval, but these frameworks were originally designed for conventional batch manufacturing. Additive manufacturing introduces new complexities, including decentralized production, variability in raw materials, and novel dosage form geometries. Regulators must determine how to evaluate consistency, reproducibility, and safety when each printed tablet may differ slightly from another. Moreover, the concept of point-of-care manufacturing—where hospitals or pharmacies print drugs on demand—raises questions about licensing, oversight, and liability. While the FDA's approval of Spritam® (levetiracetam) marked a milestone, broader adoption requires harmonized international guidelines, clear definitions of quality standards, and robust validation protocols.

5.2 Stability Issues

A major limitation of 3D printing in pharmaceuticals is the stability of active pharmaceutical ingredients (APIs) during the printing process. Techniques such as Fused Deposition Modeling (FDM) involve high temperatures to melt polymer filaments, which can degrade heat-sensitive drugs like peptides, proteins, or certain antibiotics. Similarly, exposure to light in stereolithography (SLA) or

laser energy in selective laser sintering (SLS) may compromise drug integrity. Ensuring chemical stability requires careful selection of excipients, protective coatings, or alternative printing technologies such as inkjet printing, which operates at lower temperatures. Stability concerns extend beyond manufacturing to long-term storage, as printed dosage forms may exhibit altered moisture sensitivity, mechanical strength, or dissolution profiles compared to conventional tablets. Addressing these issues demands extensive preformulation studies and innovative material science solutions.

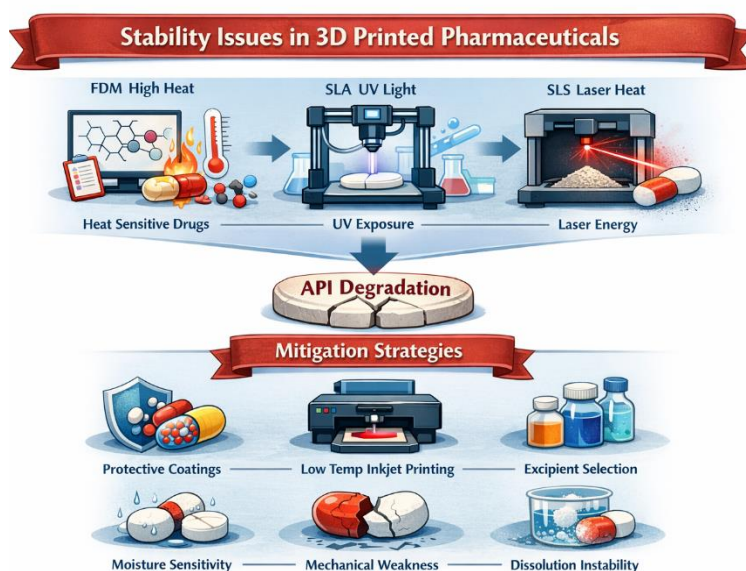


5.3 Scale-Up and Cost-Effectiveness

While 3D printing excels in personalization and small-batch production, scaling up to industrial levels remains a challenge. Traditional pharmaceutical manufacturing benefits from economies of scale, producing millions of tablets at low cost. In contrast, additive manufacturing is slower, equipment-intensive, and requires specialized expertise. The cost of raw materials, printer maintenance, and regulatory compliance can make large-scale production economically unfeasible. Furthermore, the time per unit in 3D

printing is significantly higher than in high-speed tablet presses. Hybrid models—where conventional manufacturing produces standard formulations and 3D printing is reserved for niche, patient-specific applications—may offer a practical compromise. However, widespread adoption will depend on advances in automation, multi-nozzle printing, and material throughput to reduce costs and improve efficiency.

5.4 Quality Control and Reproducibility

Ensuring quality control and reproducibility is one of the most pressing limitations of 3D-printed pharmaceuticals. Conventional manufacturing relies on validated processes with tight tolerances, whereas additive manufacturing introduces variability in layer deposition, printer calibration, and material properties. Even minor deviations in printer settings can lead to differences in drug content, release profile, or mechanical strength. Establishing robust in-process monitoring systems—such as real-time imaging, spectroscopy, or sensor-based feedback—is essential to guarantee uniformity.

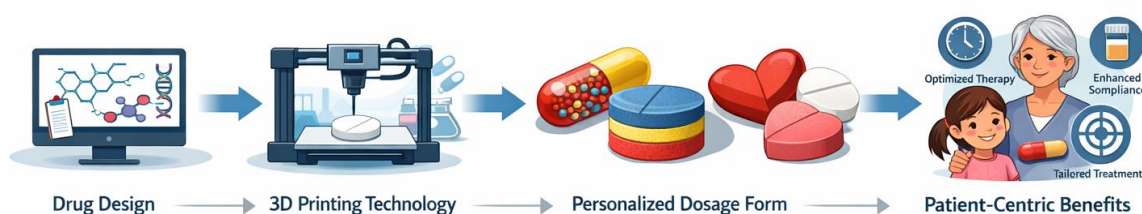

Moreover, reproducibility across different sites (e.g., hospital pharmacies using different printers) poses challenges for regulatory approval and patient safety. Standardization of printing protocols, validation methods, and quality assurance frameworks will be critical

to ensure that 3D-printed medicines meet the same reliability standards as conventionally manufactured drugs.

6. Conclusion

3D printing in pharmaceuticals represents a paradigm shift from conventional drug manufacturing to highly customizable, patient-centric production, offering precise control over dosage, release kinetics, and complex geometries. Continued advancements—such as multi-material printing, incorporation of smart materials, and AI-aided design—are expanding the frontiers of personalized therapy, enabling novel dosage forms and improving patient adherence. However, broader clinical adoption will depend on overcoming challenges including regulatory alignment, material limitations, quality assurance, cost constraints, and scalability of production. Interdisciplinary collaboration between engineers, pharmacists, clinicians, and regulatory authorities will be crucial in translating 3D printing innovations into routine practice, ultimately enhancing therapeutic outcomes and advancing precision medicine globally.

References

- [1] Michael, B., Jayaprakash, N., Munivel, N., & Jaisankar, D. (2025). 3D printing in drug delivery: emerging technologies, clinical translation, and the future of personalized medicine. *Medical Interventions in Drug Delivery*, 100242.
- [2] Gioumouxouzis, C. I. (2026). Translation of pharmaceutical 3D printing to clinical point-of-care and industrial manufacturing. *European Journal of Pharmaceutical Sciences*.
- [3] Desai, P. (2026). Three-Dimensional Printing for Precision and Personalized Pharmaceuticals. *Pharmaceutics*, 18(2), 158.
- [4] Vidiyala, N. (2025). Applications and advancement of 3D printing in pharmaceutical manufacturing and drug delivery. *Journal of Pharma Insights & Research*.

- [5] Gadi, V., Jyothsna, M., & Pirla, N. (2024). A comprehensive review of 3D printing applications in drug development and delivery. *Journal of Pharma Insights and Research*, 2(4), 139-145.
- [6] Kapoor, D. U. (2025). Innovative applications of 3D printing in personalized drug delivery systems. *PMC*.
- [7] Kulkarni, V. R. (2024). Recent advancements in pharmaceutical 3D printing. *ScienceDirect*.
- [8] Wang, S., Chen, X., Han, X., Hong, X., Li, X., Zhang, H., et al. (2023). A review of 3D printing technology in pharmaceuticals: Technology and applications, now and future. *Pharmaceutics*, 15(2), 416.
- [9] Krueger, L., Awad, A., Basit, A. W., Goyanes, A., Miles, J. A., & Popat, A. (2024). Clinical translation of 3D printed pharmaceuticals. *Nature Reviews Bioengineering*, 2, 801–803.
- [10] Ayyoubi, S., Ruijgrok, L., van der Kuy, H., & Thielen, F. (2024). What does pharmaceutical 3D printing cost? A framework and case study with hydrocortisone. *International Journal of Pharmaceutics*.

Chapter 13

Biodiesel Production: A Comprehensive Overview

A.Kumaravadivel^a, T.Jayakumar^{b*}, I.Rahamathullah^c

^aDepartment of Mechanical Engineering, Sir Isaac Newton College of Engineering and Technology, Nagappattinam, Tamil Nadu, India

*^b*Department of Mechanical Engineering, Dhanalakshmi Srinivasan Engineering College (Autonomous), Perambalur, India*

^cDepartment of Mechanical Engineering, Government College of Engineering, Srirangam, Tiruchirappalli, Tamil Nadu, India

**Corresponding Author: jaithermal92@gmail.com*

Abstract

Biodiesel production has emerged as a sustainable alternative to conventional fossil-based diesel due to its renewable nature, biodegradability, and lower exhaust emissions. Derived primarily from vegetable oils, animal fats, waste cooking oils, and microalgae, biodiesel is commonly produced through transesterification, although alternative routes such as esterification, pyrolysis, and hydroprocessing are increasingly explored. This comprehensive overview discusses the major feedstocks, production technologies, catalysts, and process parameters influencing biodiesel yield and quality. Advances in heterogeneous catalysis, enzymatic processes, and supercritical methods are highlighted for their potential to improve efficiency and environmental performance. Additionally, current challenges related to feedstock availability, cost, fuel properties, and large-scale commercialization are examined. The review emphasizes recent technological developments and future prospects aimed at enhancing biodiesel sustainability and its role in

ISBN 978-816855380-4



the global energy transition.

Keywords: Biodiesel, transesterification, renewable energy, alternative fuels, sustainable biofuels.

1. Introduction

Fossil fuels are non-renewable in nature, and also cause a lot of environmental impacts. Biodiesel on the other hand, is renewable in nature. It is one of the promising alternatives to fossil fuels. Due to its advantages over the fossil fuel such as lesser environmental effect, researchers from all over the world are showing their interest towards the usage of biodiesel. Usually, Biodiesel is produced by means of transesterification process. Transesterification is the process of converting triglycerides into fatty acid alkyl esters. Animal fats, vegetable oils, and waste cooking oils are the primary sources of triglycerides. The conversion process utilizes the components like alcohol (typically methanol) and a catalyst (Trejo-Zarraga 2018). This chapter will investigate the various process parameters of biodiesel production. Selection of feedstock, catalyst types, transesterification processes and optimization techniques are the influencing parameters in the biodiesel production. The economic and environmental implications, as well as the obstacles and possibilities for the future of this intriguing renewable fuel source, will all be thoroughly examined.

1.1 Biodiesel Feedstocks: A Diverse Array of Sources

Biodiesel can be produced from various kinds of feedstocks. Due to its availability, it can be utilized as an alternative to the existing fuel resources (Sales 2022), (Elgharbawy 2021). The resources of biodiesel are classified into three major categories: i) edible oils, ii) non-edible oils, and iii) waste materials. Initially, researchers were focused on

the edible oils for usage on I.C engines. Palm oil, rapeseed oil, and soybean oil, were the primary resources of biodiesel production (Elgharbawy 2021), (Farouk 2024). But, usage of edible oils as the transportation fuel will cause a shortage of food supply to the society (Sales 2022), (Abdulkareem-Alsultan 2021). However, non-edible oils, such as castor oil (Neupane 2021), and jatropha oil (Carrino 2020), don't make any impact on the food supply. As a result, it becomes a suitable alternative to fossil fuel. Fuel resources, such as Waste cooking oil (Chen 2021), (Monika 2023), (Abdulkareem 2024), animal fats (Andreo Martinez 2022), (Phillip 2024), and microalgae oil (Aguirre 2013), (Kumar 2022), (Ezzeroual 2021) are found to be the better replacement for biodiesel. These resources offer a lot of advantages over the conventional fuels such as, waste valorization and reduction of environmental pollution. Selecting the suitable raw material for biodiesel production highly influences the financial feasibility and ecological traces on biodiesel production. Cost of production, availability of raw material, and fatty acid composition are the major factors considered for the selection of raw material (Faba 2019), (Bas 2022), (Pandey 2024).

Raw material selection also includes the consideration of the geographical location of the region and locally cultivated crops of the region (Rodrigues 2020), (Kondrasheva 2023). In order to find the economically feasible and sustainable raw materials, industrial wastages and waste oils are also considered for the substitution of conventional fuels (Aryanfar 2024). Recycling of waste resources, such as waste mustard oil (Pandey 2024), not only replaces the conventional fuel but also offers the waste management as additional benefit to the local region. This further enhances the economic and environmental sustainability of biodiesel production. Furthermore,

the potential of grape seed oil, a byproduct of grape processing, for biodiesel production is also being investigated. This indicates the constant searching of alternative raw materials that reduces the environmental effects and increases the utilization of resources. Feedstock or raw material should be carefully selected. Because, the quality of feedstock will affect the efficiency of the transesterification process (Bas 2022).

2. Transesterification: The Central Process in Biodiesel Production

Fatty acid alkyl esters (FAMEs), the main ingredient in biodiesel, are typically separated from triglycerides via the transesterification method. One of the most important steps in the production of biodiesel is transesterification (Trejo-Zarraga 2018; Farouk 2024; Wang 2023). With this technique, a suitable catalyst is introduced to initiate the reaction between triglycerides and alcohol (either methanol or ethanol), (Elgharbawy 2021). The extraction rate and quality of biodiesel are highly influenced by the following parameters: reaction temperature, reaction time, alcohol to oil molar ratio (Abdulkareem 2024), (Abdulkareem-Alsultan 2021), (Maheshwari 2022). In the reaction process, the ester bond between the glycerol molecule and fatty acid chain is broken, causing the formation of free fatty acid methyl esters and glycerol (Farouk 2024), (Wang 2023). Glycerol is the valuable byproduct of the reaction, and can be processed into other valuable chemicals, enhancing the profitability of the production process, (Sander 2024).

The biodiesel produced in the process has some impurities and leftovers. So, purification of biodiesel is necessary to ensure the quality of fuel. Researchers are working on biodiesel purification

techniques with deep eutectic solvents (DESs) in a Karr column to improve the efficiency of production (Sander 2024). Numerous works are going on to maintain a balance between the improvising of the production process and reduction of its environmental footprint. Optimization of biodiesel production is influenced by the reaction kinematics of the process (Trejo-Zarraga 2018). Kinetic behaviors of different transesterification technologies are different from each other. It is very important to understand these behaviors to improve the efficiency of the production process.

3. Catalyst Types: Homogeneous versus Heterogeneous

Transesterification process is significantly influenced by the type of catalyst used in the process (Ruhul 2015), (Wang 2023), (Maheshwari 2022). Generally, there are two different types of catalysts, i) Homogeneous catalyst and ii) Heterogeneous catalyst. Homogeneous substances are highly reactive substances and very easy to use (Ruhul 2015), (Fattah 2020). But, some additional steps are required with the homogeneous catalysts such as post reaction separation and neutralization. These additional steps increase the production cost and also cause some environmental issues (Fattah 2020), (Cong 2021). Potassium hydroxide (KOH) and sodium hydroxide (NaOH) are the commonly used homogeneous catalysts. Heterogeneous catalyst on the other hand has advantages over the homogeneous catalyst such as, ease of separation, sustainable and stable in nature (Ruhul 2015), (Wang 2023). Metal oxides such as CaO, MgO, TiO₂, zeolites (Abdulkareem 2024), (Monika 2023), (Gouda 2022), and metal-organic frameworks (Cong 2021), (Gouda 2022), can be used as heterogeneous catalysts.

Catalytic action of heterogeneous catalysts is lesser than the homogeneous catalysts (Wang 2023), (Gouda 2022). But, due to its advantages over the homogeneous catalyst, research works are going on to develop an highly effective heterogeneous catalyst with enhanced activity and sustainable in nature (Cong 2021), (Gouda 2022). Development of highly active metal oxide frameworks (MOFs) is considered as the most important research area (Cong 2021), (Gouda 2022). Higher surface area, controllable pore sizes and its capability to adapt various active sites are the advantages of using metal-organic frameworks as catalysts. But, there are some challenges that are to be addressed such as blocking of sites and leaching of active species. From the investigations, it was found that enzymatic catalysts are eco-friendly with higher selectivity (Shomal 2021), (Maheshwari 2022). But, there are some challenges associated with these catalysts such as cost and stability (Shomal 2021), (Fattah 2020). In order to improve the performance of Metal-organic frameworks, binding the enzymes and ionic fluids within the catalysts is a proven technique (Shomal 2021). This particular technique enhances the vacant sites of the catalysts and also enhances the stability and reusability of the catalysts. Researchers are also investigating replacing the existing method of using alkaline fluids with acidic ionic liquids in order to develop a sustainable biodiesel production method.

4. Process Intensification: Novel Technologies

Biodiesel production consists of several stages. With modern technology inventions, the production process is improved frequently. To improve the sustainability and efficiency of the biodiesel production, several technologies were developed (Maheshwari 2022), (Athar 2020). Compared to conventional methods, ultrasound-

assisted transesterification (Zulqarnain 2021) and microwave-assisted transesterification (Athar 2020), (Zulqarnain 2021) gives higher yield and faster reaction rates, thereby shortening the processing time. Supercritical methanol or ethanol offers higher rate of conversion and ease of product separation, and such kind of practice is known as supercritical transesterification (AndreoMartnez 2022), (Zulqarnain 2021). Combining reaction and separation in the same unit can improve the efficiency of the process, and this technique is known as Reactive distillation (Awogbemi 2023). With the aid of these modern technologies, the processing time and power requirement of the process can be reduced significantly. And, it enhances the sustainability of the overall production process of the biodiesel (Pasha 2021). Investigating the application of tubular reactor technologies for the accelerated production of biodiesel is also going on to improve the process (Awogbemi 2022). Tubular reactors utilize the benefits of heat and mass transfer in reactions, thereby increasing the yield of biodiesel and decreasing the reaction time. In order to maximize the production rate, different types of reactors and configurations are being developed for the production. Using machine learning techniques for the optimization of process parameters is also another potential area to improve the overall process (Awogbemi 2023). Because, machine learning models might give better process parameters, and can improve the yield and efficiency of the process.

4.1 Biodiesel Quality and Regulatory Standards

There are certain international standards to monitor and regulate the quality of biodiesel. They are EN 14214 (European Union) and ASTM D6751 (American Society for Testing and Materials), (Athar 2020), (Elma 2017). The properties of biodiesel such as, physical properties and chemical properties like fatty acid methyl ester (FAME) content,

density, cetane number, oxidation stability and viscosity are defined by these standards (Pandey 2024), (Elma 2017). Biodiesels that are fulfilling these standards can only be used in the existing internal combustion engines without any modifications and operational problems (Kondrasheva 2023). There are several parameters that directly influence the quality of biodiesel like type of raw material, parameters of transesterification process, and method of purification (Elma 2017), (Pandey 2024). Producing higher quality biodiesel with required international standards and government norms can be achieved by controlling these parameters (Elma 2017), (Kondrasheva 2023). The performance and emission analysis of radish oil biodiesel in a compression ignition engine with heat resistant coating is one of the examples of studies focused on enhancing the quality of biodiesel and operational characteristics of internal combustion engines (Ravikumar 2023). In this experimental work, the impact of various kinds of biodiesel blends on operational characteristics and emission characteristics of ic engines were investigated. This experimental study indicates the effect of biodiesel quality on the achievement of financial benefits and environmental impacts.

5. Economic and Environmental Considerations

Acceptance of biodiesel depends on two major factors i) economic feasibility of production process, ii) traces of production over the environment (Sales 2022), (Zhang 2022). In these two factors, the economy of biodiesel production is associated with the factors like the cost of raw material, consumption of power, cost of production process and catalyst costs (Chen 2021), (Monika 2023). Usage of cheaper raw materials like waste cooking oil and other non-edible oil reduces the cost of production drastically. Factors such as water consumption, land use, and greenhouse gas emissions are associated

with the effects of biodiesel production on the environment (Sales 2022), (Zhang 2022). Life cycle assessments (LCAs) are an essential element for analyzing the entire ecological aspects of the biodiesel production, which covers the overall production cycle from the cultivation of raw material to the end-of-life disposal (Gupta 2022), (Ali 2022), (Zhang 2022). Using sustainable resources, establishing effective waste management techniques, and optimized process parameters are the promising techniques to reduce the environmental effects of the biodiesel production process (Gupta 2022), (Yadav 2022). From the life cycle assessment of production of biodiesel from the extracts of rapeseed oil, it was found that large-scale production shows lesser greenhouse gas emissions than that of smaller-scale production (Gupta 2022). It indicates the necessity of viewing the scale of production during the analysis of environmental effects of biodiesel production. Additionally, the investigation of sustainability of microalgal biodiesel production processes by means of exergetic assessment has revealed that enhancement of energy efficiency is essential for interpreting biodiesel production as more attractive (OfariBoateng 2012).

6. Challenges and Future Directions

Even though a lot of improvements have been made in the biodiesel production process, some challenges are still existing in the production (Abdulkareem-Alsultan 2021), (Rashid 2023). The challenges associated with the biodiesel production are, i) Production cost: it is higher than the production cost of conventional fuels, especially the edible oils, ii) Catalysts: Efficiency and sustainability of catalysts are need to be improved, iii) Scalability: scaling up the production of biodiesel is a challenging task (Abdulkareem-Alsultan 2021). Development of cost effective and eco-friendly catalysts,

optimization of process parameters, and identification of effective raw materials are the areas of research that are needed to be developed (Wang 2023), (Gouda 2022), (Pandit 2023). Combined biodiesel production units and biorefineries can offer a cost effective way to produce the biodiesel. Because, these type plants use almost entire byproducts of biomass and are also sustainable in nature (Pasha 2021). Enhancing lipid content of crops can increase the yield of production. This can be done by the modifications and advancements of genetics and metabolism of crops, such as algae and oleaginous yeasts (Abeln 2021), (Yadav 2022). Use of machine learning models and artificial intelligence (Awogbemi 2023), (Awogbemi 2022) can optimize the process parameters and predicting biodiesel yields. Additionally, applying nano science and nanomaterials in the biodiesel production and property enhancement is a potential research area that needs to be covered. Nano- materials can be utilized as additives, and catalysts. It can be applied in the extraction of lipid content. Thereby, they provide potential enhancements in efficiency and sustainability. But, the effects of using nanomaterials on the environment and human health should be investigated carefully. Utilization of castor bean as a raw material for the production of biodiesel on fringe land is an effective strategy to improve the sustainability (Carrino 2020). In this strategy, the requirements of renewable energy are fulfilled and the problems associated with the usage of unproductive land are rectified. Recycling industrial waste for the biodiesel production can be the effective solution to meet the energy demands, reducing the wastage, and recovering the resource (Aryanfar 2024). In this technique, the problem of waste management is rectified economically with the conversion of wastage to energy resources. But, there is a need for

some experimental works to rectify the problems associated with the upscaling of these modern techniques.

7. Conclusion

To meet the energy demands of the future, biodiesel production is one of the sustainable energy resources (Vignesh 2021). Advancing the catalysis, process intensification, and utilizing genetically modified crops are the advancements made in this research area. However, to adopt biodiesel as a transportation fuel, the following problems should be rectified. They are production cost, upscaling of technology, and environmental effects of the production process. Rectifying these issues will make biodiesel a suitable alternative to fossil fuels. Experimental works, aiming on exploring sustainable biomass, development of effective catalysts and optimization of process parameters are necessary to make use of the fullest potential of biodiesel in a carbon free transportation sector (Vignesh 2021), (Zhang 2022). Analytical techniques such as life cycle assessments and economic analyses in this area of work will further improve the profitability and sustainability of the production (Ali 2022), (Gupta 2022). Careful investigation of various biomasses and feedstocks, such as industrial wastages and non-edible oils, is a major area of work to reduce the environmental effects and cost of biodiesel production (Phillip 2024), (Zulqarnain 2021). Designing novel catalysts and developing process enhancement techniques are necessary to increase the sustainability and effectiveness of biodiesel production (Wang 2023), (Awogbemi 2022). Adapting modern technologies such as machine learning, deep learning for optimization of process parameters will increase the quality and production rate of biodiesel (Awogbemi 2023). Integrating these modern techniques will increase the sustainability of biodiesel and

also the possibilities of adoption. Current experimental works in this area will lead to the fulfillments of future energy demands.

References

1. Abdulkareem, Ali Nasr, and Nurul Fitriah Nasir. "A Comprehensive Review of Biodiesel Production using Heterogeneous Catalyst" None, 2024,. <https://doi.org/10.37934/armne.22.1.103115>
2. Abdulkareem-Alsultan, G., et al.. "A Short Review on Catalyst, Feedstock, Modernised Process, Current State and Challenges on Biodiesel Production" Multidisciplinary Digital Publishing Institute, 2021,. <https://doi.org/10.3390/catal11111261>
3. Abeln, Felix, and Christopher J. Chuck. "The history, state of the art and future prospects for oleaginous yeast research" BioMed Central, 2021,. <https://doi.org/10.1186/s12934-021-01712-1>
4. Aguirre, Ana-Maria, et al.. "Engineering challenges in biodiesel production from microalgae" Critical Reviews in Biotechnology, 2013,. <https://doi.org/10.3109/07388551.2012.695333>
5. Ali, Sameh S., et al.. "Recent advances in the life cycle assessment of biodiesel production linked to azo dye degradation using yeast symbionts of termite guts: A critical review" Elsevier BV, 2022,. <https://doi.org/10.1016/j.egy.2022.05.240>
6. Andreo Martinez, Pedro, et al.. "Waste animal fats as feedstock for biodiesel production using non-catalytic supercritical alcohol transesterification: A perspective by the PRISMA methodology" Elsevier BV, 2022,. <https://doi.org/10.1016/j.esd.2022.06.004>
7. Aryanfar, Yashar, et al.. "Production of Biodiesel from Industrial Sludge: Recent Progress, Challenges, Perspective" Processes, 2024,. <https://doi.org/10.3390/pr12112517>
8. Athar, Moina, et al.. "Intensification and optimization of biodiesel production using microwave-assisted acid-organo catalyzed transesterification process" Nature Portfolio, 2020,. <https://doi.org/10.1038/s41598-020-77798-1>

9. Awogbemi, O., and D. Kallon. "Application of machine learning technologies in biodiesel production processA review" *Frontiers in Energy Research*, 2023,. <https://doi.org/10.3389/fenrg.2023.1122638>
10. Awogbemi, Omojola, and Daramy Vandi Von Kallon. "Application of Tubular Reactor Technologies for the Acceleration of Biodiesel Production" *Multidisciplinary Digital Publishing Institute*, 2022,. <https://doi.org/10.3390/bioengineering9080347>
11. Bas, Renata N. Vilas, and M. Mendes. "A Review Of Biodiesel Production From Non-Edible Raw Materials Using The Transesterification Process With A Focus On Influence Of Feedstock Composition And Free Fatty Acids" *None*, 2022,. <https://doi.org/10.4067/s0717-97072022000105433>
12. Carrino, Linda, et al.. "Biofuel Production with Castor Bean: A WinWin Strategy for Marginal Land" *Multidisciplinary Digital Publishing Institute*, 2020,. <https://doi.org/10.3390/agronomy10111690>
13. Chen, Chuangbin, et al.. "Sustainability and challenges in biodiesel production from waste cooking oil: An advanced bibliometric analysis" *Elsevier BV*, 2021,. <https://doi.org/10.1016/j.egy.2021.06.084>

Chapter 14

Comparison of Static, Modal and Transient Analysis of A Composite Cylinder Using FEA

Shaisundaram V.S.^a, Arun Vikram M P^b, Azhagesan N^b

^aAssistant Professor, Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies, Pallavaram, Chennai, India

^bUG Student, Department of Automobile Engineering, Vels Institute of Science, Technology & Advanced Studies, Chennai, India

Abstract

This chapter presents a comprehensive study comparing static, modal, and transient finite element analyses (FEA) of a composite cylinder subjected to mechanical and dynamic loads. The objective is to highlight the influence of material anisotropy inherent in composite laminates on stress distribution, natural frequencies, and time-dependent responses. Finite element modeling is employed to simulate the behavior of a composite cylinder with orthotropic material properties under static pressure, vibrational excitation, and impact loading. Results demonstrate significant differences in stress values, deformation patterns, frequency spectra, and transient responses, emphasizing the need to select appropriate analysis type based on design criteria. The chapter concludes with comparative insights that guide engineers in selecting suitable analysis techniques for composite cylindrical structures in engineering applications.

Keywords: Static analysis, modal analysis, transient analysis, composite cylinder, finite element analysis.

1. Introduction

Composite cylinders are widely used in engineering applications where high strength-to-weight ratio, corrosion resistance, and tailored mechanical properties are required. Typical applications include pressure vessels, pipelines, aerospace fuselages, drive shafts, and automotive structural components. Unlike isotropic materials, composite materials exhibit anisotropic behavior due to fiber orientation and stacking sequence, making their structural response highly dependent on material configuration and loading conditions. As a result, accurate prediction of stresses, deformations, and dynamic behavior is critical during the design stage.

The structural assessment of composite cylinders requires consideration of static, modal, and transient responses. Static analysis evaluates deformation and stress distribution under constant loads, modal analysis determines natural frequencies and mode shapes, and transient analysis captures time-dependent structural behavior under dynamic loading. A comparative study of these analyses provides comprehensive insight into the mechanical performance and stability of composite cylindrical structures under real-world operating conditions.

Finite Element Analysis (FEA) has emerged as an efficient numerical tool for analyzing complex composite structures due to its ability to handle material anisotropy, complex geometries, and varied loading conditions. By discretizing the composite cylinder into finite elements and applying appropriate material models and boundary conditions, FEA enables accurate prediction of structural responses that are otherwise difficult to obtain through analytical methods.

2. Theoretical Background and Governing Equations

ISBN 978-816855380-4



Composite cylinders are commonly modeled as laminated structures composed of multiple orthotropic plies bonded together. Each ply exhibits direction-dependent elastic properties governed by classical lamination theory. The stress–strain relationship for an individual lamina can be expressed using generalized Hooke’s law for orthotropic materials, where stresses are related to strains through stiffness coefficients dependent on fiber orientation.

For static analysis, the equilibrium of forces in the absence of inertial effects is governed by the equation

$$[K]\{u\} = \{F\}$$

where $[K]$ is the global stiffness matrix, $\{u\}$ is the displacement vector, and $\{F\}$ represents the applied load vector. This formulation enables the computation of displacements, strains, and stresses throughout the composite cylinder.

Modal analysis is based on free vibration theory and neglects external loads and damping. The governing eigenvalue equation is given by

$$([K] - \omega^2[M])\{\phi\} = 0$$

where $[M]$ is the mass matrix, ω is the natural frequency, and $\{\phi\}$ represents the mode shape. The resulting natural frequencies provide insight into resonance behavior and dynamic stability.

Transient dynamic analysis incorporates time-dependent loads and inertial effects and is governed by the dynamic equilibrium equation

$$[M]\{\ddot{u}\} + [C]\{\dot{u}\} + [K]\{u\} = \{F(t)\}$$

where $[C]$ is the damping matrix and $\{F(t)\}$ is the time-varying load. This analysis captures the real-time structural response of the composite cylinder under dynamic excitation.

3. Finite Element Modeling of the Composite Cylinder

The finite element modeling of the composite cylinder begins with geometric definition, including length, diameter, and wall thickness. The laminate stacking sequence is defined based on the number of plies, fiber orientation angles, and individual ply thicknesses. Accurate representation of laminate architecture is essential to capture anisotropic behavior.

Material properties such as longitudinal and transverse elastic moduli, shear moduli, Poisson's ratios, and density are assigned to each ply. Shell or solid composite elements are typically employed depending on thickness and accuracy requirements. A structured mesh with appropriate element size is generated to balance computational efficiency and solution accuracy.

Boundary conditions are applied to replicate real operating constraints, such as fixed, simply supported, or free ends. Static loads, harmonic excitation, or time-dependent forces are applied depending on the type of analysis. Mesh convergence studies are performed to ensure result independence from element size.

4. Comparative Analysis of Static, Modal, and Transient Responses

Static analysis results provide information on deformation patterns and stress concentration regions within the composite cylinder. Maximum stresses typically occur near constrained regions or load application points, and their magnitude is strongly influenced by fiber orientation and stacking sequence. These results are crucial for evaluating strength and failure criteria. Modal analysis reveals the natural frequencies and corresponding mode shapes of the composite cylinder. Lower modes are associated with global bending or axial deformation, while higher modes correspond to local shell vibrations.

The comparison of modal results with static deformation patterns helps identify structurally critical regions susceptible to resonance.

Transient analysis captures the time-history response of displacement, stress, and acceleration under dynamic loading. Peak responses and damping behavior are evaluated to assess structural safety under impact or fluctuating loads. A comparative assessment of all three analyses provides a holistic understanding of the structural performance of the composite cylinder. The comparative results demonstrate that static, modal, and transient analyses address different but complementary aspects of composite cylinder behavior. Static analysis identifies stress distribution and deformation limits, modal analysis assesses vibration characteristics, and transient analysis evaluates time-dependent structural response. The influence of laminate orientation and boundary conditions is found to be significant across all analyses. The study highlights that relying on a single type of analysis may lead to incomplete design assessment, particularly for composite structures operating under dynamic conditions. Finite Element Analysis proves to be an effective tool for integrating multiple analysis approaches into a unified framework.

5. Conclusion

This chapter presented a comprehensive finite element-based comparison of static, modal, and transient analyses for a composite cylindrical structure to capture its complete mechanical and dynamic behavior. The results demonstrate that static analysis is essential for identifying stress distribution and deformation limits, modal analysis provides critical insight into natural frequencies and mode shapes governing vibration characteristics, and transient analysis effectively

predicts time-dependent responses under dynamic loading conditions. The comparative evaluation highlights the strong influence of material anisotropy, laminate stacking sequence, and boundary conditions on the overall structural performance of composite cylinders. The study confirms that an integrated approach combining static, modal, and transient analyses using FEA is necessary for reliable design and safe operation of composite cylindrical structures, particularly in applications subjected to complex loading environments.

References

- [1] Sahu, S., & Kumar, R. S. (2026). Finite element modeling for static and free vibration analysis of laminated composite circular cylinders using Carrera Unified Formulation. *Journal of Composite Materials*.
- [2] De Castro Saiki, L. E., & Gomes, G. F. (2025). Comparative analysis of modal, static, and buckling behaviors in thin-walled composite cylinders: A detailed study. *Composite Structures*, 352, 118672.
- [3] Shao, D. (2025). Dynamic response analysis of the composite cylindrical structure under vibration isolation conditions. *International Journal of Structural Dynamics*.
- [4] Hirwani, C. K. (2025). Nonlinear transient analysis of delaminated composite shells using shell elements. *Thin-Walled Structures*, 221, 114467.
- [5] Oo, Y. P. S. (2025). Simplified semi-analytical solutions for dynamic responses of composite cylinders in underwater conditions. *Engineering Analysis with Boundary Elements*.
- [6] Ostadzadeh, S. M. (2024). Quasi-static bending analysis of composite laminated cylindrical panels under hygrothermal loads. *Thin-Walled Structures*.
- [7] (2025). Buckling behaviour for advanced composite cylindrical shells. *Polymer Composites*.
- [8] Zheng, W. (2025). Transient dynamic analysis of composite laminated

aerospace structures under real load conditions. Symmetry.


- [9] (2026). Dynamic finite element and experimental strain analysis for automotive composite components. Symmetry.
- [10] Guan, Z. (2025). Review of finite element modelling of composite structures subjected to extreme loading conditions. Composite Design and Manufacturing.

Frontiers in Integrated Science and Technological Innovation

April 2026



Dr. K. ARUMUGANAINAR is an Assistant Professor in the Department of Mechanical Engineering at J.P. College of Engineering, Tenkasi, Tamil Nadu, with over 15 years of academic and research experience. He holds a Ph.D. in Mechanical Engineering and earned his M.E. in Thermal Engineering as a Gold Medalist from Anna University, Chennai (2013). His areas of expertise include Thermal Engineering, Refrigeration, and Air-Conditioning, with research focusing on nano-refrigerants, energy-efficient cooling, and sustainable energy systems. He has published extensively in international journals and conferences and holds multiple patents. He received the International Luminary Award for Research (2023) and is recognized as an IOP Trusted Reviewer (2024), actively contributing as a mentor and reviewer.



Mrs. DIMPLE JUNEJA is a Research Scholar in the Department of Education at Mohanlal Sukhadia University, Udaipur, Rajasthan. She holds multiple qualifications, including M.Phil. in Commerce, M.Com., M.Ed., MBA (Finance & HR), M.A. in Economics, and a Certificate in Guidance. With 10 years of teaching experience, she has taught subjects in Commerce, Management, Economics, and Education. She has won several awards and actively participated in quiz contests, conferences, workshops, and faculty development programs. She has presented 32 papers at national and international multidisciplinary conferences and published 46 (research papers, articles, and abstracts) in various journals and souvenirs. She has also served as the editor of 36 books and 5 souvenirs. Dimple is a lifetime member of several professional organizations.



Dr. M. KARTHICK is an Assistant Professor in the Department of Mechanical Engineering at Vel Tech Rangarajan Dr. Sagunthala R&D Institute of Science and Technology, Chennai, Tamil Nadu. He brings over 13 years of experience in teaching and research. Dr. Karthick earned his Ph.D. in Mechanical Engineering in 2024 and completed his Master of Engineering in Engineering Design in 2014. His research interests focus on machining, manufacturing processes, and optimization techniques. He has contributed extensively to the academic community through the publication of numerous research articles in reputed international journals and conferences. Dr. Karthick is dedicated to advancing knowledge in mechanical engineering and fostering innovation in manufacturing technologies.



Dr. S. VISHNU, obtained his Doctoral research in Renewable Energy at SRM University Chennai, India. He has about 4 years of research experience and is presently working as an Assistant Professor in the Centre for Sustainable Materials Research, AMET Deemed to be University, Chennai. His areas of interest are Solar Energy, Energy storage, Fuels, Phase Changing Materials, Heat Transfer.

SCIENTIFIC RESEARCH REPORTS

(A Book Publisher, approved by Govt. of India)

I Floor, S S Nagar, Chennai - 600 087,
Tamil Nadu, India.
editors@srrbooks.in, contact@srrbooks.in
www.srrbooks.in

