



Contents lists available at ScienceDirect

Materials Today: Proceedings

journal homepage: www.elsevier.com/locate/matpr

Modelling and stress analysis of shaft used in hydraulic steering pump

S. Arunkumar*, C. Dhanasekaran, V. Muthuraman, T. Vinod Kumar

Department of Mechanical Engineering, Vels Institute of Science, Technology and Advanced, Studies (VISTAS), Chennai, Tamilnadu, India

ARTICLE INFO

Article history:

Received 20 July 2020
Accepted 8 August 2020
Available online xxx

Keywords:

Stress analysis of shaft
Hydraulic steering pump
Shaft
20NiCrMo2
Steering System

ABSTRACT

This work deals with the stress analysis of a shaft used in hydraulic steering pump, which helps to transmit motion between two gears used in the pump. Suitable material (20NiCrMo2) with a greater tensile strength and similar chemical composition is also recommended. This suitable material thus found out is also being used for making the high speed shaft of steering pumps used in an automobile. This material is also being suggested to the industry as an alternate material used for making high speed shafts. Step by step process performed by us is explained in detail. The analysis of the shaft and the outcomes are also given. By observing these values, the material of the shaft can be analyzed properly. The conclusion of the report shows that the given objective has been achieved and parameters necessary to improve the endurance life is also given. With the help of the linear model, relevant transfer functions and the underlying control structure of the power steering system have been derived and analysed [1]

© 2020 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the International Conference on Newer Trends and Innovation in Mechanical Engineering: Materials Science.

1. Introduction

This work deals with the stress analysis of a shaft used in hydraulic steering pump, which helps to transmit motion between two gears used in the pump. To carry out analysis of a case hardened pump shaft, used in hydraulic power steering pump. To find the weakest zone in a shaft of a steering pump [1,2] To find the factor of safety for the zone and to suggest methods of improving the fatigue life of the shaft used Table 1.1.

1.1. Components of power steering

A power steering system in an automobile has several components such as rack and pinion, gears, hydraulic pump, hose, pump and rotary valve. Of the above mentioned parts pump and rotary valve which play a major role in the working of the power steering has been explained in detail below.

1.1.1. Pump

The pump must be designed to provide adequate flow when the engine is idling. As a result, the pump moves much more fluid than necessary when the engine is running at faster speeds [11]. The

pump contains a pressure-relief valve to make sure that the pressure does not get too high, especially at high engine speeds when so much fluid is being pumped [12].

1.2. Characteristics of fatigue

The process starts with dislocation movements, eventually forming persistent slip bands that Nucleate short cracks. The greater the applied stress, the shorter the life. In recent years, researchers have found that failures occur below the theoretical fatigue limit at very high fatigue lives (10^9 to 10^{10} cycles) [3,4]. An ultrasonic resonance technique is used in these experiments with frequencies around 10–20 kHz. High cycle fatigue strength (about 10^3 to 10^8 cycles) can be described by stress based parameters [5]. Low cycle fatigue (typically less than 10^3 cycles) is associated with widespread plasticity, thus a strain based parameter should be used for fatigue life prediction. Testing is conducted with constant strain amplitudes at 1–5 Hz [6–10].

2. Experimental procedure

2.1. Material 20NiCrMo2

Characteristics: Case hardened alloy steel generally supplied as roll to HB 255 max.

* Corresponding author.

E-mail address: gct.arunkumar@gmail.com (S. Arunkumar).

<https://doi.org/10.1016/j.matpr.2020.08.293>

2214-7853/© 2020 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the International Conference on Newer Trends and Innovation in Mechanical Engineering: Materials Science.

Table 1.1
Comparison between materials.

COMPOSITION(Weight %)	20NiCrMo2
CARBON (%)	0.17-0.23
SILICON (%)	0.17-0.40
MANGANESE (%)	0.65-0.85
CHROMIUM (%)	0.35-0.7
IRON (%)	96-97
TENSILE STRENGTH (MPa) after tempering	925-1100

Application:

Arbors, Cam shafts, kingpins, ratchets, Gears, shafts, splined shafts etc.

DIN number: 1.6523.Recommended quenching temperatures vary from 780 to 820c in the case of case quenching. About 860 to 900 °C for 4 to 5 h, in the case of core quenching.

Annealed to a maximum hardness of 212 HB for any purpose.

Tempering: Recommended tempering temperatures vary from 150 to 200c

Cost of the material is 800-1000 \$ / ton for high quality.

2.2. Stress analysis

Stress analysis was carried out using analysis software ANSYS 12.1 for a load of 1471.9 N

Detail reports with stress acting on different planes are given below. (Refer Fig. 2.1)Fig. 3.1.Fig. 3.2.Fig. 3.3.Fig. 3.4.Fig. 3.5. Fig. 3.6.Fig. 3.7.Fig. 3.8.Fig. 3.9.Fig. 3.10.

2.3. Algorithm for the analysis

Step 1: Required structural analysis is selected from the preferences option

Step 2: The element type is selected for the given shaft: preprocessor ->element type ->add/edit/delete ->add ->solid quad 4 node 42 -> ok.

Step 3: Material is selected and suitable young's modulus and poison's ratio is selected i.e. young's modulus = 2.1e5 and poison's ratio = 0.3

Step 4: The pro E model is imported using the following commands: find -> file -> import -> pro E. the required file is selected in the available format (.igs)

Step 5: The 3D model that has been imported is meshed: mesh -> mesh attribute -> select material plane. Once the material plane has been selected, the mesh size is specified with element length of 0.5

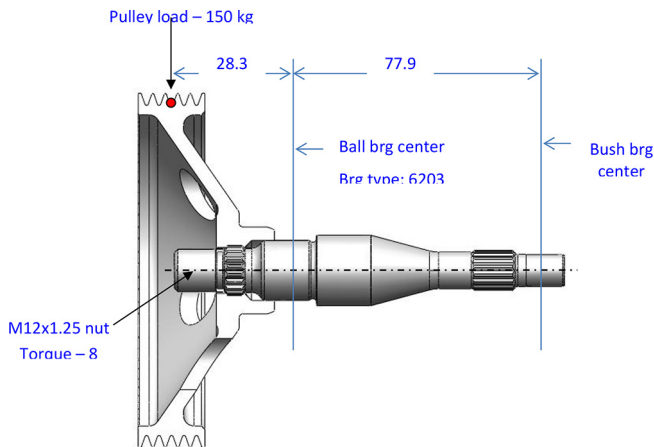


Fig. 2.1. Load details required for analysis.

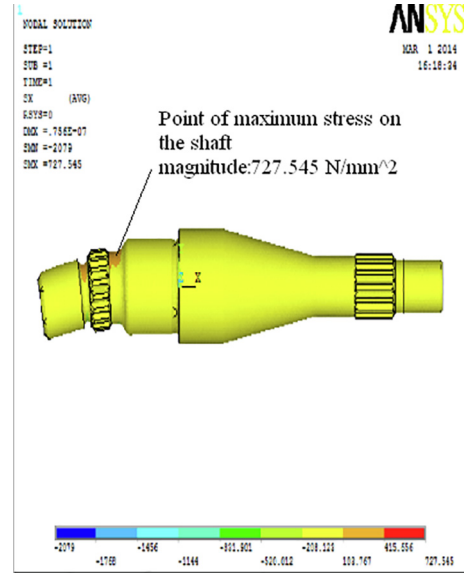


Fig. 3.1. Stress acting on the shaft in X plane.

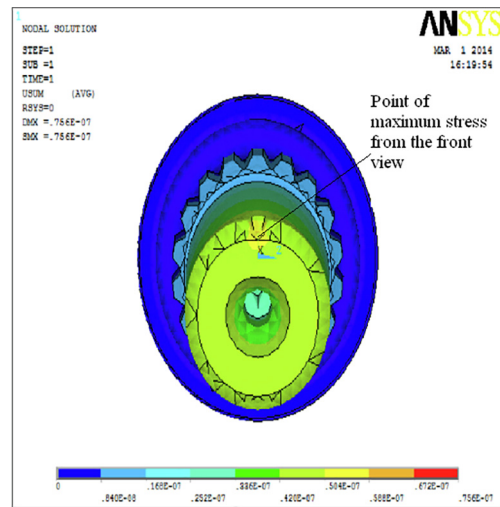


Fig. 3.2. Stress acting on the shaft in X plane left.

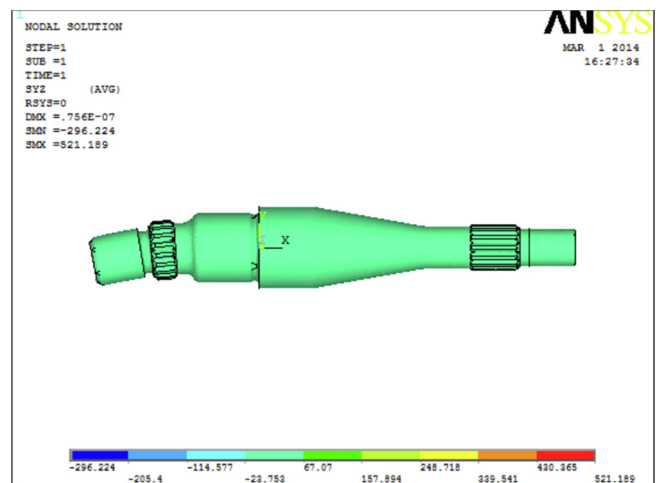


Fig. 3.3. Stress acting on the shaft in YZ plane.

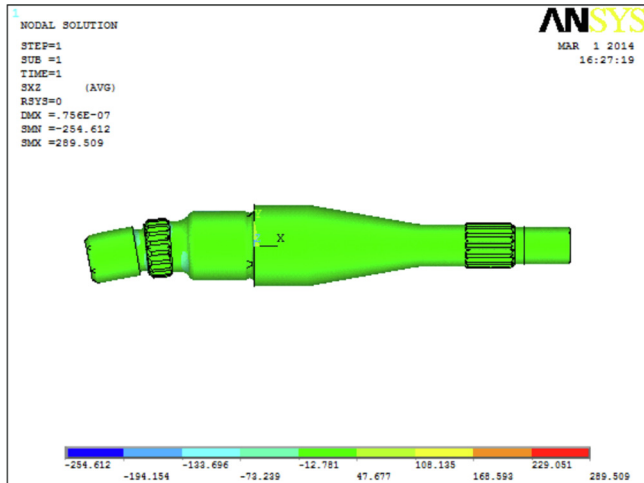


Fig. 3.4. Stress acting on the shaft in ZX plane.

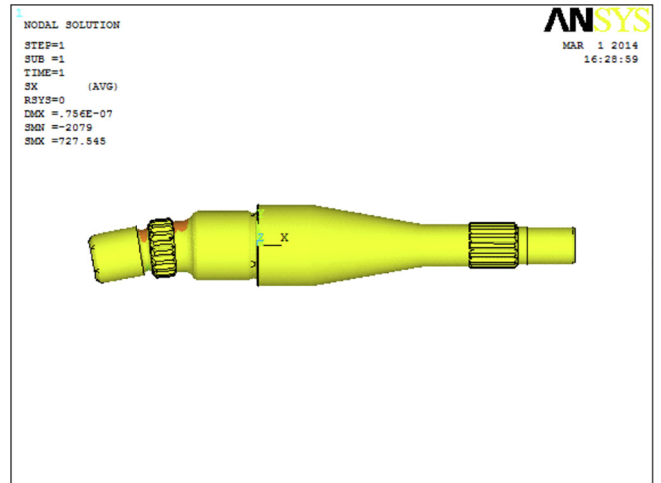


Fig. 3.7. Stress acting animation 4.

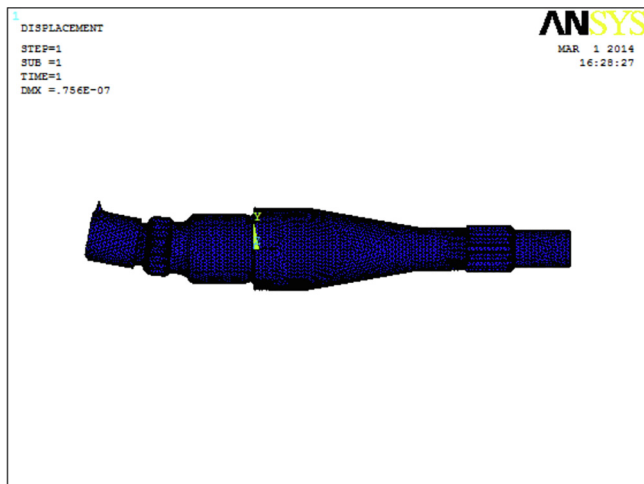


Fig. 3.5. Stress acting animation 1.

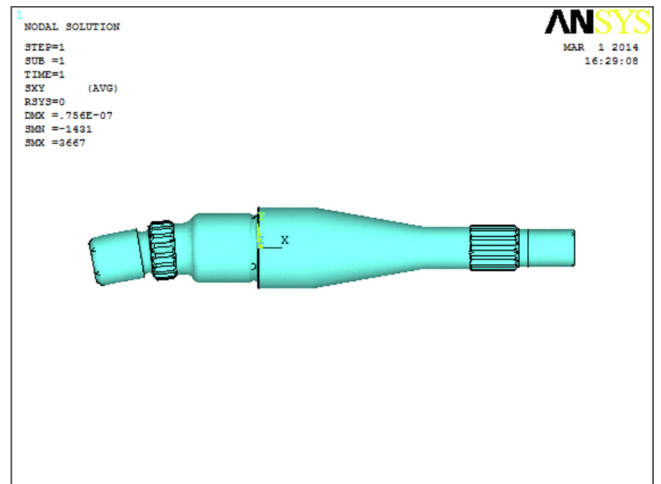


Fig. 3.8. Stress acting animation 5.

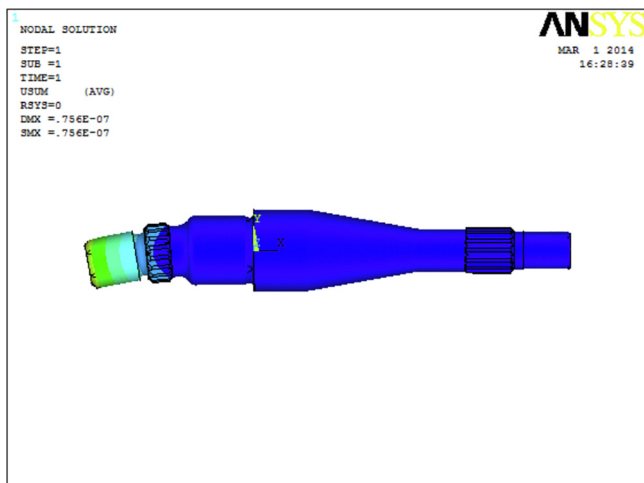


Fig. 3.6. Stress acting animation 2.

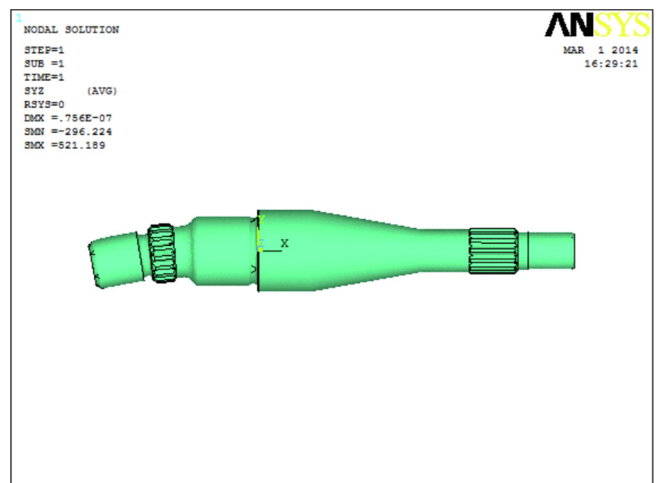


Fig. 3.9. Stress acting animation 6.

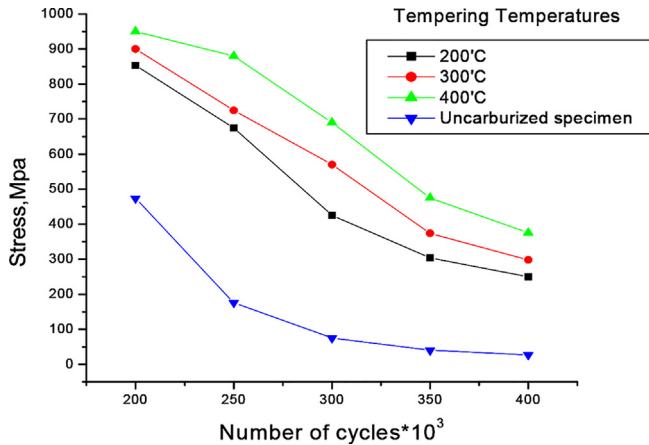


Fig. 3.10. Stress vs. number of cycle curve with tempering temperature.

Step 6: Tetrahedron mesh type is selected followed by selecting a mapped mesh option from the mesh attribute option.

Step7: For applying loads, define loads ->apply ->structural ->deformations. The constraint points are selected which the two are bearing positions on the shaft.

Step 8: The given force is applied on the shaft: force/moment -> (points for load is selected).

Step 9: The required direction of force is specified, i.e. in the negative F_y direction.

Step 10: the problem is solved through the following steps: solution -> solve -> current LS -> ok

Step11: The result is plotted using the following commands: generate post processor -> plot result -> contour plot -> nodal solutions -> solution -> stress. The stress values are found out for the required planes.

Step12: The required analysis has been carried out on the shaft

3. Results and discussions

The below shaft analyzed diagram shows the point on the shaft where maximum stress acts when the design load is applied on the specified point on the shaft.

The above analyzed diagram shows the front view of the shaft along with the point of maximum stress acting on it.

The above image depicts the stress acting on the shaft along the YZ plane.

The above image depicts the stress acting on the shaft along the ZX plane.

3.1. Calculations

Factor of Safety CALCULATION:

Factor of Safety for current material (16MnCr5)

Factor of Safety = YIELD STRESS / DESIGN STRESS

= 822.57 / 727.5

Factor of Safety = 1.130

Here,

Yield stress is taken @ 45 HRC ZONE

Design stress is calculated by analysis.

(Refer Fig. 2.1)

Tensile strength for the same material after heat treatment is 975 N/mm²

Therefore the Factor of Safety = 975 / 727.54

Factor of Safety = 1.27

Since the Factor of Safety for the recommended material is higher than the current material, while taking the yield stress into consideration the recommended material is a an appropriate material for the shaft used in the steering pump.

4. Conclusion

Thus the analysis of a case hardened pump shaft, which is used in hydraulic power steering pump, was done in ANSYS12.1. The maximum stress acting on the shaft was found to be 727.54 MPa

The weakest zone in a shaft of steering pump i.e. maximum stress acting was in zonell

The factor of safety for the zone was also found to be 1.13.

A suitable material 20NiCrMo2 was also suggested with a higher tensile strength of 925–1100 Mpa

Material with lower factor of can also be suggested based on the application according to material science.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] Dr. Jamal Nayief Sultan, "Tikrit Journal of Engineering Sciences"/Vol.20/No.4/ March 2013.
- [2] D.A. Anderson, J.C. Tannehill, R.H. Pletcher, *Computational Fluid Dynamics and Heat Transfer*, McGraw Hill, New York, 1984.
- [3] Chandrasekhar, R. et al, "Studies on Nonequilibrium Phenomena in Supersonic Chemically Reacting Flows", NASA Contractor Report 194662, 1993.
- [4] McCormack, R. W., "The Effect of Viscosity in Hypervelocity Impact Cratering", AIAA Paper 69-354, May 1969.
- [5] Hinze, J. O., *Turbulence*, McGraw Hill Book Co., pp. 1-790, 1975.
- [6] A. Godwin, Antony, V. Vijayan, S. Saravanan, S. Baskar, M. Loganathan, *Analysis of Wear Behaviour of Aluminium Composite With Silicon Carbide And Titanium Reinforcement*, Int. J. Mech. Eng. Technol. 9 (2018) 681-691.
- [7] S. Saravanan, A. Godwin Antony, V. Vijayan, M. Loganathan, S. Baskar, *Synthesis of SiO₂ nano particles by using sol-gel route*, Int. J. Mech. Eng. Technol. 1 (2019) 785-790.
- [8] S. Dinesh, A. Godwin, Antony, K. Rajaguru, V. Vijayan, *Experimental investigation and optimization of material removal rate and surface roughness in centerless grinding of magnesium alloy using grey relational analysis*, Mech. Mech. Eng. 21 (2017) 17-28.
- [9] S. Dinesh A. Godwin Antony K. Rajaguru V. Vijayan *Investigation and Prediction of Material Removal Rate and Surface Roughness in CNC Turning of En24 Alloy Steel* Asia. Jour. Rese. Soci. Scie. and Human. 6 8 849 10.5958/2249-7315.2016.00654.7 <http://www.indianjournals.com/ijor.aspx?target=ijor:ajrssh&volume=6&issue=8&article=066>.
- [10] Baskar Sanjeevi, Karikalan Loganathan, "Synthesis of MWCNT Nanofluid by using Two Step Method", Thermal Science, International Scientific Journal, Published Online: November 2019.
- [11] Osman Culha, Seher Tas, Mustafa Toparli. "Evaluation of Residual Stresses in Heat Treated AISI 5115 Steels via Analysis of Instrumented Sharp Indentation Load-Unload Cycle."
- [12] S. Baskar, V. Vijayan, S. Saravanan, A.V. Balan, A. Godwin, Antony, *Effect of Al₂O₃, Aluminium Alloy and Fly Ash for Making Engine Component*, Int. J. Mech. Eng. Technol. (IJMET) 9 (12) (2018) 91-96.